CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro

Motherboard X7DA8 (3.00GHz, Intel Xeon 5160 processor)

SPECint2000 = 3016

SPECint_base2000 = 3013

SPEC license #01176 | Tested by: Supermicro | Test date: May-2006 | Hardware Avail: May-2006 | Software Avail: Mar-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	76.0	1842	75.9	1844
175.vpr	1400	66.3	2110	64.9	2157
176.gcc	1100	35.0	3143	35.0	3143
181.mcf	1800	42.2	4263	42.2	4263
186.crafty	1000	36.2	2762	36.3	2752
197.parser	1800	78.7	2288	78.8	2283
252.eon	1300	33.3	3902	33.3	3908
253.perlbmk	1800	49.0	3670	49.2	3656
254.gap	1100	36.9	2978	36.9	2978
255.vortex	1900	38.3	4967	38.3	4967
256.bzip2	1500	63.8	2351	63.9	2346
300.twolf	3000	88.0	3410	88.0	3411

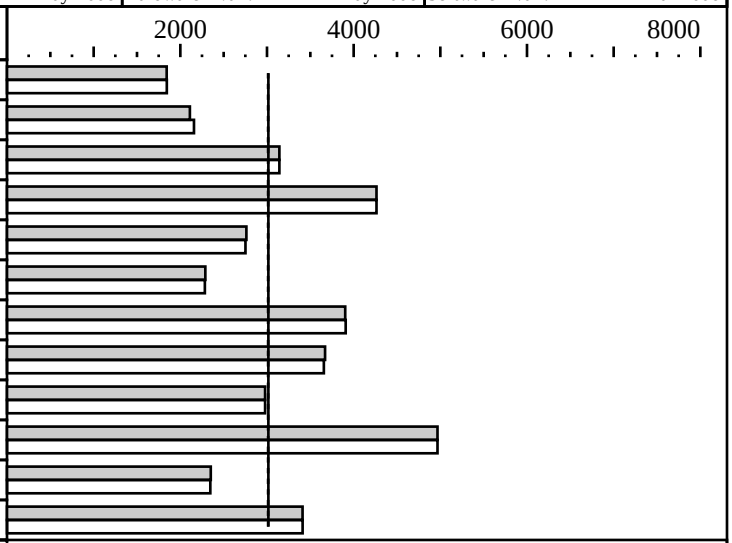

Hardware

CPU:	Intel Xeon 5160 processor (3.00 GHz, 4MB L2 shared, 1333 MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1, 2
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip per core
Secondary Cache:	4MB(I+D) on chip shared
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 X 512MB 667MHz CL5 DDR2 FB-DIMM
Disk Subsystem:	1 X WD 2500 250GB SATA
Other Hardware:	N/A

Software

Operating System:	Windows XP Professional w/ SP2
Compiler:	Intel C++ Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_CC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
252.eon:     -DHAS_ERRLIST
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
256.bzip2:   -fast -Oa -Qunroll1 +FDO
300.twolf:    -fast -O3 +FDO shlW32M.lib
Tested systems can be used with SC825S2-R700LPV case,
To ensure system stability, a 500W (minimum) ATX power supply
[4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description located as of X7DA8:
http://www.supermicro.com/products/motherboard/Xeon1333/5000X/X7DA8.cfm
The system bus runs at 1333 MHz
```