CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S3, Intel Xeon 5120 processor, 1.86 GHz

SPECint_rate2000 = 80.2

SPECint_rate_base2000 = 80.2

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jun-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

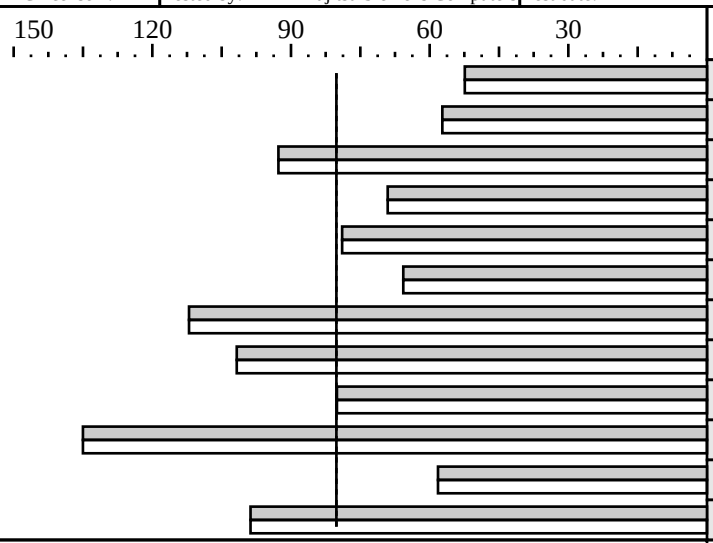

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	124	52.4	4	124	52.4
175.vpr	4	113	57.3	4	113	57.3
176.gcc	4	55.0	92.7	4	55.0	92.7
181.mcf	4	121	69.1	4	121	69.1
186.crafty	4	58.8	78.9	4	58.8	78.9
197.parser	4	127	65.7	4	127	65.7
252.eon	4	53.8	112	4	53.8	112
253.perlbmk	4	82.1	102	4	82.1	102
254.gap	4	63.8	80.1	4	63.8	80.1
255.vortex	4	65.3	135	4	65.3	135
256.bzip2	4	120	58.2	4	120	58.2
300.twolf	4	141	98.8	4	141	98.8

Hardware

CPU:	Intel Xeon 5120 processor (1.86 GHz, 4MB L2, 1066 MHz system bus)
CPU MHz:	1866
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip, per core
Secondary Cache:	4096KB(I+D) on chip, shared
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1GB DDRII-RAM PC2-4200F (CAS 4-4-4)
Disk Subsystem:	Seagate ST373454SS (SAS, 15.4krpm, 73GB)
Other Hardware:	none

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060323Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafy:   -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast +FDO shlW32M.lib
   for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib

Peak tuning flags
   same as baseline (basepeak=true set globally)

The system bus runs at 1066 MHz

This result was measured with 32-bit binaries using the 32-bit version of
the operating system.
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries