CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro

Motherboard X7DB3 (3.00GHz, Intel Xeon 5160 processor)

SPECint_rate2000 = 115

SPECint_rate_base2000 = 115

SPEC license #01176 | Tested by: Supermicro | Test date: May-2006 | Hardware Avail: May-2006 | Software Avail: Mar-2006

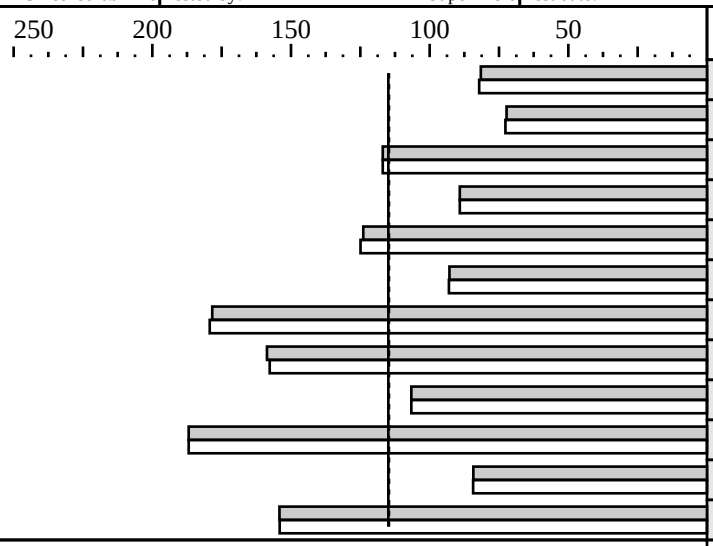

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	79.7	81.6	4	79.1	82.1
175.vpr	4	89.9	72.3	4	89.4	72.7
176.gcc	4	43.7	117	4	43.7	117
181.mcf	4	93.7	89.1	4	93.7	89.1
186.crafty	4	37.4	124	4	37.1	125
197.parser	4	89.9	92.9	4	89.8	93.1
252.eon	4	33.8	178	4	33.6	179
253.perlbmk	4	52.6	159	4	53.0	158
254.gap	4	47.9	107	4	47.9	107
255.vortex	4	47.2	187	4	47.2	187
256.bzip2	4	82.6	84.3	4	82.5	84.3
300.twolf	4	90.3	154	4	90.3	154

Hardware

CPU:	Intel Xeon 5160 processor (3.00 GHz, 4MB L2 shared, 1333 MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1, 2
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip per core
Secondary Cache:	4MB(I+D) on chip (per chip)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 x 2.0GB 667MHz FBDIMM ECC CL5
Disk Subsystem:	1X 30GB Fujitsu MHS2030AT SATA HDD
Other Hardware:	N/A

Software

Operating System:	Windows server 2003 Enterprise Edition 32-bits W/ SP1
Compiler:	Intel C++ Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_CC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
252.eon:     -DHAS_ERRLIST
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
256.bzip2:   -fast -Oa -Qunroll1 +FDO
300.twolf:    -fast -O3 +FDO shlW32M.lib
Tested systems can be used with SC825TQ-R700LPV case,
To ensure system stability, a 550W (minimum) ATX power supply
[4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description located as of X7DB3:
http://www.supermicro.com/products/motherboard/Xeon1333/5000P/X7DB3.cfm
The system bus runs at 1333 MHz
```