CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro

Motherboard X7DBX(1.60GHz, Intel Xeon E5310 processor)

SPECint2000 = 1714

SPECint_base2000 = 1711

SPEC license #01176 | Tested by: Supermicro | Test date: Oct-2006 | Hardware Avail: Nov-2006 | Software Avail: Mar-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	140	997	140	1002
175.vpr	1400	110	1268	108	1296
176.gcc	1100	59.7	1844	59.7	1844
181.mcf	1800	61.8	2913	61.8	2913
186.crafty	1000	67.4	1484	67.6	1480
197.parser	1800	143	1257	143	1255
252.eon	1300	62.4	2084	62.0	2096
253.perlbmk	1800	90.8	1983	90.9	1980
254.gap	1100	63.6	1728	63.6	1728
255.vortex	1900	65.2	2913	65.2	2913
256.bzip2	1500	115	1300	116	1296
300.twolf	3000	163	1839	163	1838

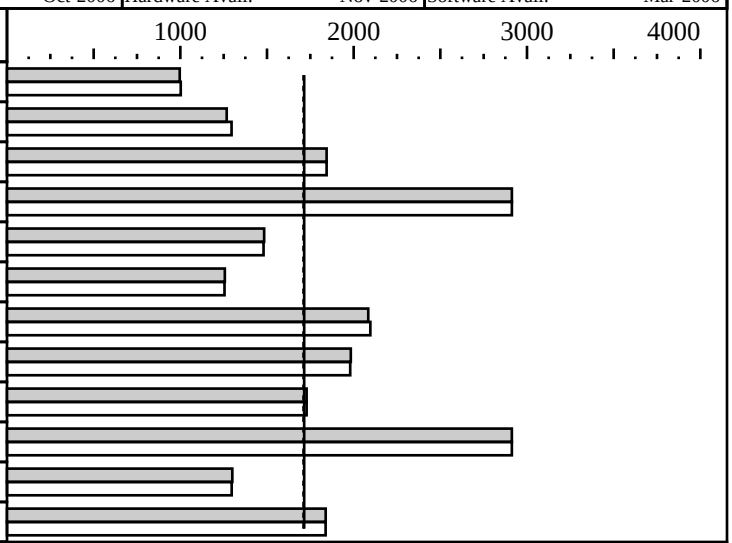

Hardware

CPU:	Intel Xeon E5310 processor (1.60 GHz,1066MHz bus)
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Parallel:	N/A
Primary Cache:	32KBI + 32KBD on chip per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 X 2GB DDR2 ECC CL5 667MHz FBDIMM
Disk Subsystem:	1 X Seagate Barracuda 120GB 7200 RPM
Other Hardware:	N/A

Software

Operating System:	Windows Server 2003 Enterprise Edition 32-bits w/ SP1
Compiler:	Intel C++ Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_CC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
252.eon:     -DHAS_ERRLIST
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

256.bzip2: -fast -Oa -Qunroll1 +FDO
300.twolf: -fast -O3 +FDO shlW32M.lib

Tested systems can be used with SC816S-R700 case,
To ensure system stability, a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description located as of http://www.supermicro.com/products/motherboard/Xeon1333/5000P/X7DBX.cfm
The system bus runs at 1066 MHz
shlw32m-80.lib is the V8.0 SmartHeap library renamed to co-exist with older versions