CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX630, AMD Opteron (TM) 885

SPECint_rate2000 = 163

SPECint_rate_base2000 = 148

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Oct-2006 | Hardware Avail: May-2006 | Software Avail: Jul-2006

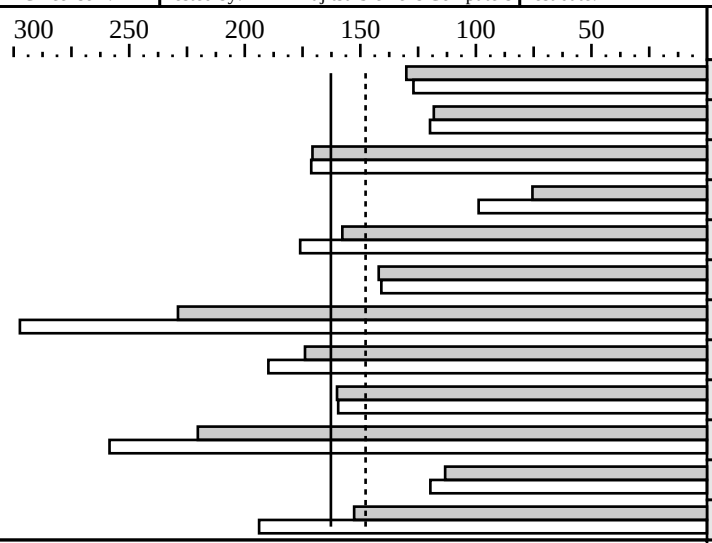

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	8	99.9	130	8	102	127
175.vpr	8	110	118	8	108	120
176.gcc	8	59.8	171	8	59.6	171
181.mcf	8	221	75.5	8	169	98.8
186.crafty	8	58.8	158	8	52.7	176
197.parser	8	118	142	8	119	141
252.eon	8	52.7	229	8	40.6	297
253.perlbmk	8	96.0	174	8	88.0	190
254.gap	8	63.8	160	8	64.0	160
255.vortex	8	80.0	220	8	68.2	259
256.bzip2	8	123	113	8	116	120
300.twolf	8	182	153	8	144	194

Hardware

CPU:	AMD Opteron (TM) 885 processor (2.60 GHz)
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	1,2,4 chips
Parallel:	No
Primary Cache:	64KB(I) + 64KB(D) on chip, per core
Secondary Cache:	1024KB (I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16x2048MB DDR-RAM PC3200R
Disk Subsystem:	Seagate ST373454SS (SAS, 15.4krpm)
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1
Compiler:	Intel C++ 9.1 Build 20060519Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1= -Qprof_gen  PASS2= -Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafty:  -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast -arch:SSE2 -Oi- +FDO
   for C++ programs: -O3 -Qipo -Qcxx-features +FDO

Peak tuning flags
   164.gzip:    -O3 -Qipo -QxW +FDO
   175.vpr:     -O3 -Qipo -QxW -Qoption,c,-ip_ninl_max_stats=2000,
                -ip_ninl_max_total_stats=4500 +FDO
   176.gcc:     -O3 -Qipo -QxW -Oi- -Qunroll3 +FDO shlw32M.lib
   181.mcf:     -O3 -Qipo -QaxN +FDO shlw32M.lib
   186.crafty:  -O3 -Qipo -QxW +FDO shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    197.parser:  -Oi -Qipo -QxW +FDO shlw32M.lib
    252.eon:     -O3 -Qipo -QxW -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000,
                 -ip_ninl_max_total_stats=4500 +FDO shlw32M.lib
    253.perlbmk: -O3 -Qipo -QxW +FDO shlw32M.lib
    254.gap:     -O3 -Qipo -QxW +FDO shlw32M.lib
    255.vortex:  -O3 -Qipo -arch:SSE -Oi- -Qoption,c,-ip_ninl_max_stats=2000,
                 -ip_ninl_max_total_stats=4500 +FDO shlw32M.lib
    256.bzip2:   -O3 -Qipo -Qunroll2 shlw32M.lib
    300.twolf:   -O3 -Qipo -QxW -Qunroll3 -Qansi_alias +FDO shlw32M.lib


    'start /b /wait /affinity' command is used to bind CPU(s) to processes

    boot options:  /noexecute=alwaysoff

    BIOS settings: Memory timing=1T
    DRAM Bank Interleave=AUTO

    This result was measured with 32-bit binaries using the 32-bit version of
    the operating system.

    For information about Fujitsu Siemens Computers in your country please see:
    http://www.fujitsu-siemens.com/countries
```