CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro

Motherboard X7DB8(2.66GHz, Intel Xeon X5355 processor)

SPECint_rate2000 = 198

SPECint_rate_base2000 = 198

SPEC license #01176 | Tested by: Supermicro | Test date: Nov-2006 | Hardware Avail: Nov-2006 | Software Avail: Mar-2006

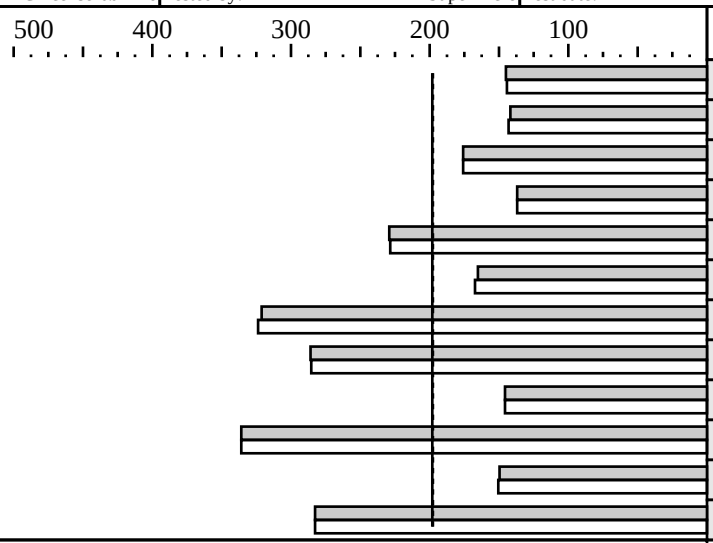

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	8	89.6	145	8	90.0	144
175.vpr	8	91.6	142	8	90.8	143
176.gcc	8	58.0	176	8	58.0	176
181.mcf	8	122	137	8	122	137
186.crafty	8	40.5	229	8	40.6	228
197.parser	8	101	165	8	99.8	167
252.eon	8	37.6	321	8	37.3	324
253.perlbmk	8	58.4	286	8	58.5	285
254.gap	8	70.1	146	8	70.1	146
255.vortex	8	52.5	336	8	52.5	336
256.bzip2	8	93.0	150	8	92.5	151
300.twolf	8	98.5	283	8	98.5	283

Hardware

CPU:	Intel Xeon X5355 processor (2.66 GHz,1333MHz bus)
CPU MHz:	2660
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1, 2 chips
Parallel:	N/A
Primary Cache:	32KBI + 32KBD on chip per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 X 2GB DDR2 ECC CL5 667MHz FBDIMM
Disk Subsystem:	1 X Seagate Barracuda 120GB 7200 RPM
Other Hardware:	N/A

Software

Operating System:	Windows Server 2003 Enterprise Edition 32-bits w/ SP1
Compiler:	Intel C++ Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_CC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
252.eon:     -DHAS_ERRLIST
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

256.bzip2: -fast -Oa -Qunroll1 +FDO
300.twolf: -fast -O3 +FDO shlW32M.lib

Tested systems can be used with SC816S-R700 case,
To ensure system stability, a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description located as of http://www.supermicro.com/products/motherboard/Xeon1333/5000P/X7DB8.cfm
The system bus runs at 1333 MHz
shlw32m-80.lib is the V8.0 SmartHeap library renamed to co-exist with older versions