CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro

Motherboard X7DBR-8(2.00GHz, Intel Xeon E5335 processor)

SPECfp_rate2000 = 94.0

SPECfp_rate_base2000 = 93.8

SPEC license #01176 | Tested by: Supermicro | Test date: Nov-2006 | Hardware Avail: Nov-2006 | Software Avail: Mar-2006

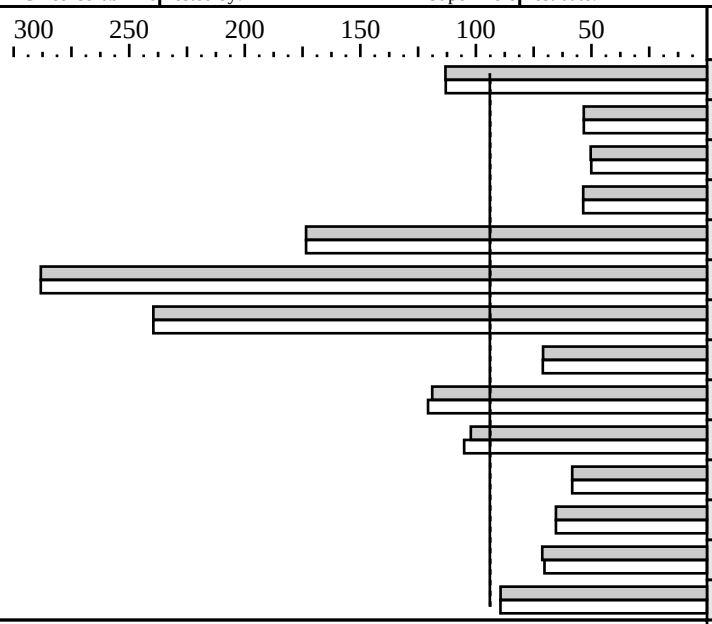

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	8	131	113	8	131	113
171.swim	8	540	53.3	8	540	53.3
172.mgrid	8	332	50.3	8	334	50.1
173.applu	8	364	53.6	8	364	53.6
177.mesa	8	74.9	173	8	74.9	173
178.galgel	8	93.4	288	8	93.4	288
179.art	8	101	240	8	101	240
183.equake	8	170	70.9	8	170	71.0
187.facerec	8	148	119	8	146	121
188.ammp	8	200	102	8	194	105
189.lucas	8	318	58.3	8	318	58.3
191.fma3d	8	298	65.4	8	298	65.4
200.sixtrack	8	143	71.3	8	145	70.3
301.apsi	8	270	89.3	8	270	89.4

Hardware

CPU:	Intel Xeon E5335 processor (2.00 GHz,1333MHz bus)
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1, 2 chips
Parallel:	N/A
Primary Cache:	32KBI + 32KBD on chip per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 X 2GB DDR2 ECC CL5 667MHz FBDIMM
Disk Subsystem:	1 X Seagate Barracuda 120GB 7200 RPM
Other Hardware:	N/A

Software

Operating System:	Windows Server 2003 Enterprise Edition 32-bits w/ SP1
Compiler:	Intel C++ and Fortran Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_FC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs:  -fast -Qansi_alias +FDO
Base tuning for 177.mesa:  -fast    +FDO shlW32M.lib
Base tuning for 179.art:  -fast     +FDO shlW32M.lib
Base tuning for 183.equake:  -fast  +FDO shlW32M.lib
Base tuning for 188.ammp:  -fast    +FDO shlW32M.lib
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  basepeak=yes
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -QxP -Oa -Qrcd -Qipo  +FDO  shlW32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
187.facerec:  -fast -Qunroll1 -Qscalar_rep- +FDO
188.ammp:     -fast -Oa +FDO  shlW32M.lib
189.lucas:    -fast -Qprefetch- +FDO
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO

     Tested systems can be used with SC816S-R700 case,
   To ensure system stability, a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
   Product description located as of http://www.supermicro.com/products/motherboard/Xeon1333/5000P/X7DBR-8.cfm
     The system bus runs at 1333 MHz
     shlw32m-80.lib is the V8.0 SmartHeap library renamed to co-exist with older versions
```