CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro

Motherboard X7DBR-8(2.00GHz, Intel Xeon E5335 processor)

SPECfp2000 = 2118

SPECfp_base2000 = 2114

SPEC license #01176 | Tested by: Supermicro | Test date: Nov-2006 | Hardware Avail: Nov-2006 | Software Avail: Mar-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	53.0	3021	53.0	3022
171.swim	3100	113	2750	113	2749
172.mgrid	1800	137	1309	138	1309
173.applu	2100	124	1689	124	1689
177.mesa	1400	70.8	1977	70.8	1977
178.galgel	2900	59.7	4859	59.7	4860
179.art	2600	37.3	6980	37.3	6980
183.equake	1300	49.5	2628	48.0	2710
187.facerec	1900	87.1	2182	87.3	2178
188.ammp	2200	150	1469	148	1485
189.lucas	2000	89.2	2243	89.1	2244
191.fma3d	2100	134	1563	134	1563
200.sixtrack	1100	137	802	139	791
301.apsi	2600	213	1218	213	1218

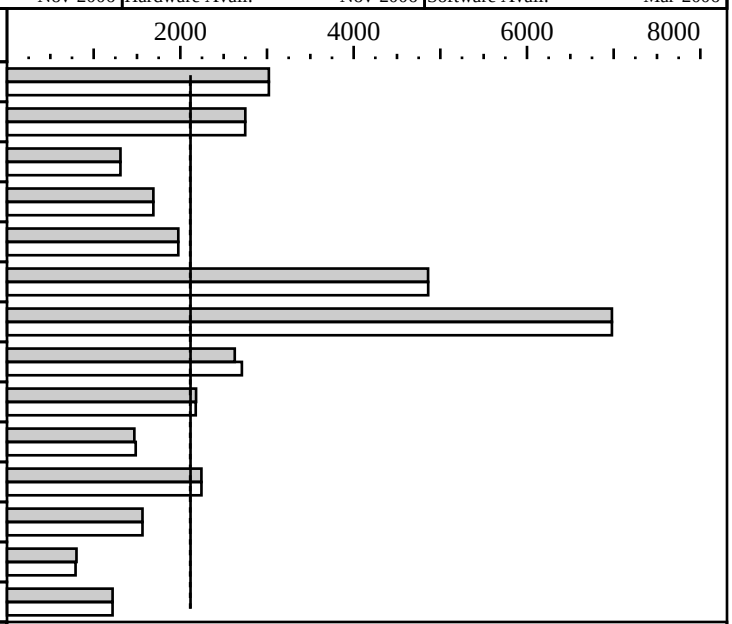

Hardware

CPU:	Intel Xeon E5335 processor (2.00 GHz,1333MHz bus)
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Parallel:	N/A
Primary Cache:	32KBI + 32KBD on chip per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 X 2GB DDR2 ECC CL5 667MHz FBDIMM
Disk Subsystem:	1 X Seagate Barracuda 120GB 7200 RPM
Other Hardware:	N/A

Software

Operating System:	Windows Server 2003 Enterprise Edition 32-bits w/ SP1
Compiler:	Intel C++ and Fortran Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_FC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs:  -fast -Qansi_alias +FDO
Base tuning for 177.mesa:  -fast    +FDO shlW32M.lib
Base tuning for 179.art:  -fast     +FDO shlW32M.lib
Base tuning for 183.equake:  -fast  +FDO shlW32M.lib
Base tuning for 188.ammp:  -fast    +FDO shlW32M.lib
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  basepeak=yes
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -QxP -Oa -Qrcd -Qipo  +FDO  shlW32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
187.facerec:  -fast -Qunroll1 -Qscalar_rep- +FDO
188.ammp:     -fast -Oa +FDO  shlW32M.lib
189.lucas:    -fast -Qprefetch- +FDO
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO

     Tested systems can be used with SC816S-R700 case,
   To ensure system stability, a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
   Product description located as of http://www.supermicro.com/products/motherboard/Xeon1333/5000P/X7DBR-8.cfm
     The system bus runs at 1333 MHz
     shlw32m-80.lib is the V8.0 SmartHeap library renamed to co-exist with older versions
```