CINT2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon 5110 processor, 1.60GHz)

SPECint_rate2000 = 35.2

SPECint_rate_base2000 = 35.2

SPEC license #: 9001 | Tested by: Itautec | Test date: Oct-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

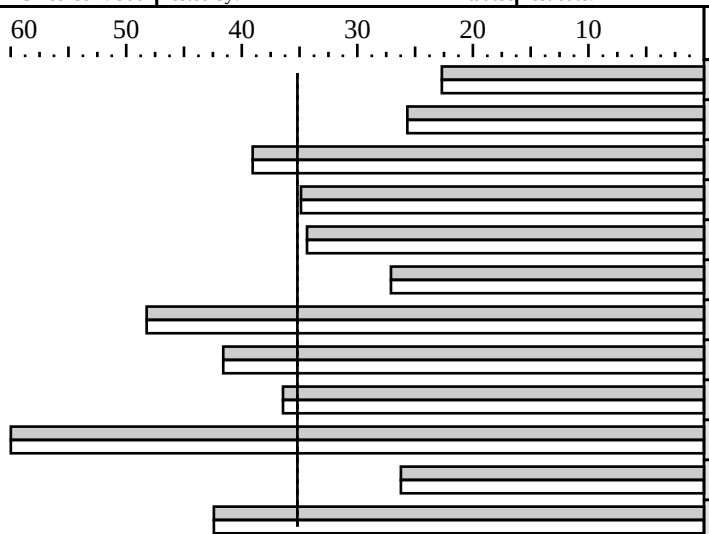

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	143	22.7	2	143	22.7
175.vpr	2	127	25.7	2	127	25.7
176.gcc	2	65.3	39.1	2	65.3	39.1
181.mcf	2	120	34.9	2	120	34.9
186.crafty	2	67.5	34.4	2	67.5	34.4
197.parser	2	154	27.1	2	154	27.1
252.eon	2	62.5	48.2	2	62.5	48.2
253.perlbmk	2	100	41.6	2	100	41.6
254.gap	2	70.0	36.4	2	70.0	36.4
255.vortex	2	73.5	60.0	2	73.5	60.0
256.bzip2	2	133	26.2	2	133	26.2
300.twolf	2	164	42.4	2	164	42.4

Hardware

CPU:	Intel Xeon 5110 processor (1.60 GHz, 4MB L2 shared, 1066 MHz system bus)
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4096KB(I+D) on chip, per chip, shared
L3 Cache:	N/A
Other Cache:	N/A
Memory:	6x2GB DDR2-RAM PC2-5300F (CAS 5-5-5)ECC
Disk Subsystem:	1 x 120GB Serial ATA 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060519Z (for 32-bit applications), Microsoft Visual Studio 2005(for libraries), MicroQuill SmartHeap for SMP Library 8.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
PORTABILITY FLAGS
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafy:   -DNT_i386
   252.eon:     -DHAS_ERRLIST
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
GENERAL
   +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning flags
   for C programs:   -fast -QxP +FDO shlSMPMt.lib
   for C++ programs: -fast -Qcxx_features +FDO
EXTRA LIBRARIES
   MicroQuill SmartHeap for SMP Library 8.0 available from
   http://www.microquill.com/
```