SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7320, 2.13 GHz)

SPECint®2006 = 16.5

SPECint_base2006 = 14.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Aug-2007
Hardware Availability: Oct-2007
Software Availability: Nov-2007

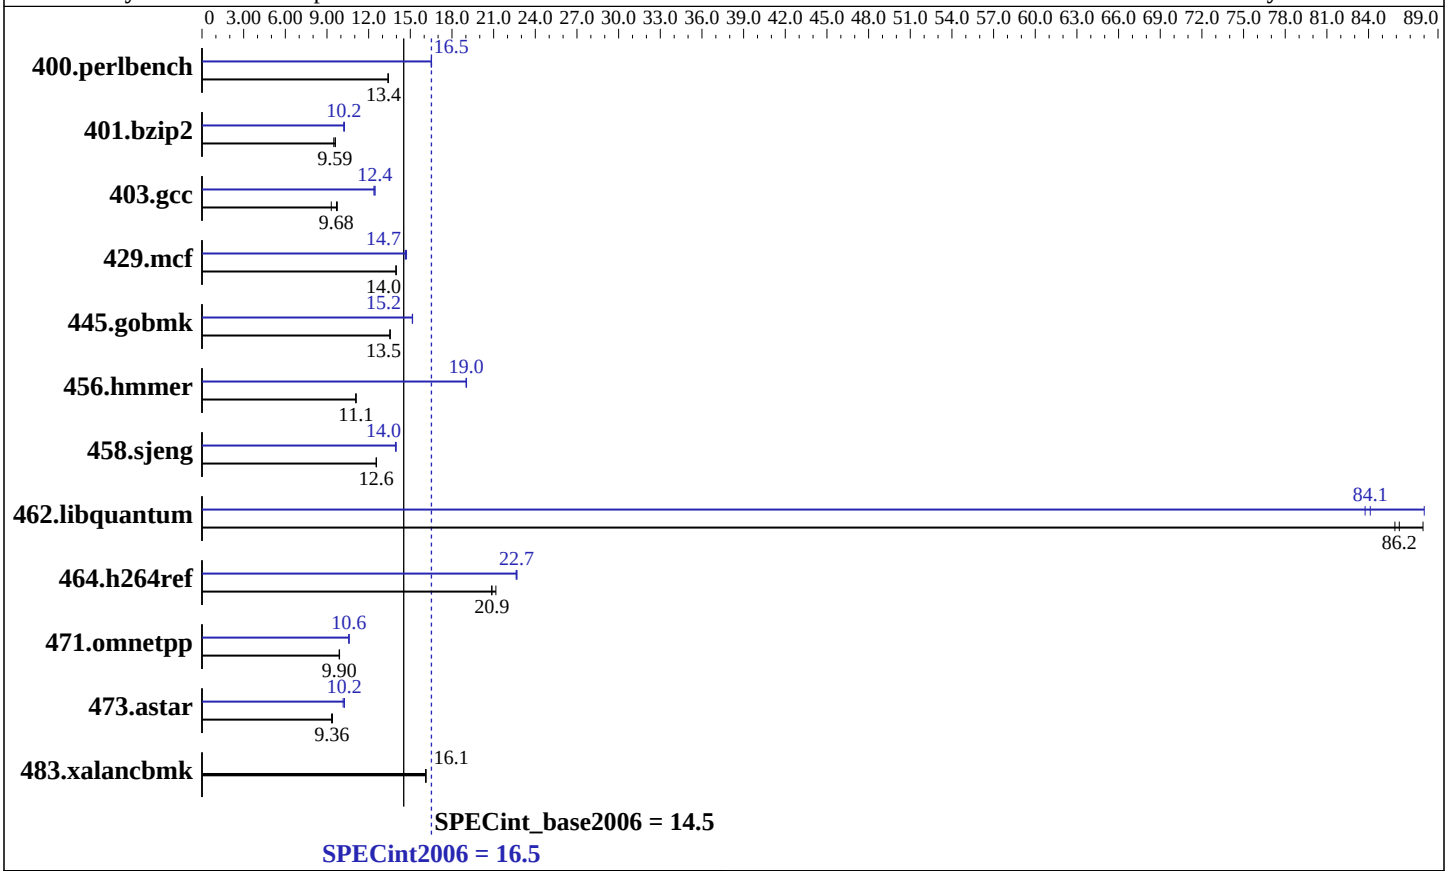

Hardware

CPU Name:	Intel Xeon E7320
CPU Characteristics:	Quad Core, 2.13 GHz
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	1,2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (16 * 1GB Samsung DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	Seagate, SAS, 73GB, 10Krpm, 1 disk only
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10 SP1 RC1, Kernel linux-cbgm 2.6.16.43-0.5-smp for x86_64
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 Build 20070725
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap library V8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

(Test Sponsor: Intel Corporation)

Lenovo R630 G7 (Intel Xeon processor E7320, 2.13 GHz)

SPECint2006 = 16.5

SPECint_base2006 = 14.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Aug-2007
Hardware Availability: Oct-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	730	13.4	728	13.4	**728**	**13.4**	592	16.5	591	16.5	**592**	**16.5**
401.bzip2	**1007**	**9.59**	1017	9.49	1005	9.60	941	10.3	945	10.2	**944**	**10.2**
403.gcc	865	9.31	826	9.74	**831**	**9.68**	650	12.4	**647**	**12.4**	646	12.5
429.mcf	**653**	**14.0**	652	14.0	653	14.0	619	14.7	**622**	**14.7**	623	14.6
445.gobmk	774	13.5	**775**	**13.5**	775	13.5	692	15.2	**692**	**15.2**	693	15.1
456.hmmer	**841**	**11.1**	841	11.1	843	11.1	490	19.0	490	19.0	**490**	**19.0**
458.sjeng	**964**	**12.6**	964	12.6	964	12.6	**867**	**14.0**	865	14.0	869	13.9
462.libquantum	241	85.9	236	87.9	**240**	**86.2**	247	83.8	235	88.0	**246**	**84.1**
464.h264ref	1046	21.2	**1060**	**20.9**	1061	20.9	978	22.6	976	22.7	**976**	**22.7**
471.omnetpp	631	9.90	**632**	**9.90**	633	9.88	591	10.6	**590**	**10.6**	590	10.6
473.astar	752	9.33	**750**	**9.36**	747	9.40	691	10.2	**685**	**10.2**	684	10.3
483.xalancbmk	**428**	**16.1**	429	16.1	428	16.1	**428**	**16.1**	429	16.1	428	16.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Bios settings:
Hardware Prefetcher:      Disabled
Adjacent Sector Prefetch: Disabled
High Bandwidth Option:    Disabled
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -vec-guard-write -parallel -par-runtime-control`

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include`

456.hmmer: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive -auto-ilp32`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.28.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.28.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:51:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 October 2007.