SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System p 570 (4.7 GHz, 1 core, RedHat)

SPECfp®2006 = 22.5

SPECfp_base2006 = 18.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2007
Hardware Availability: Jun-2007
Software Availability: Oct-2007

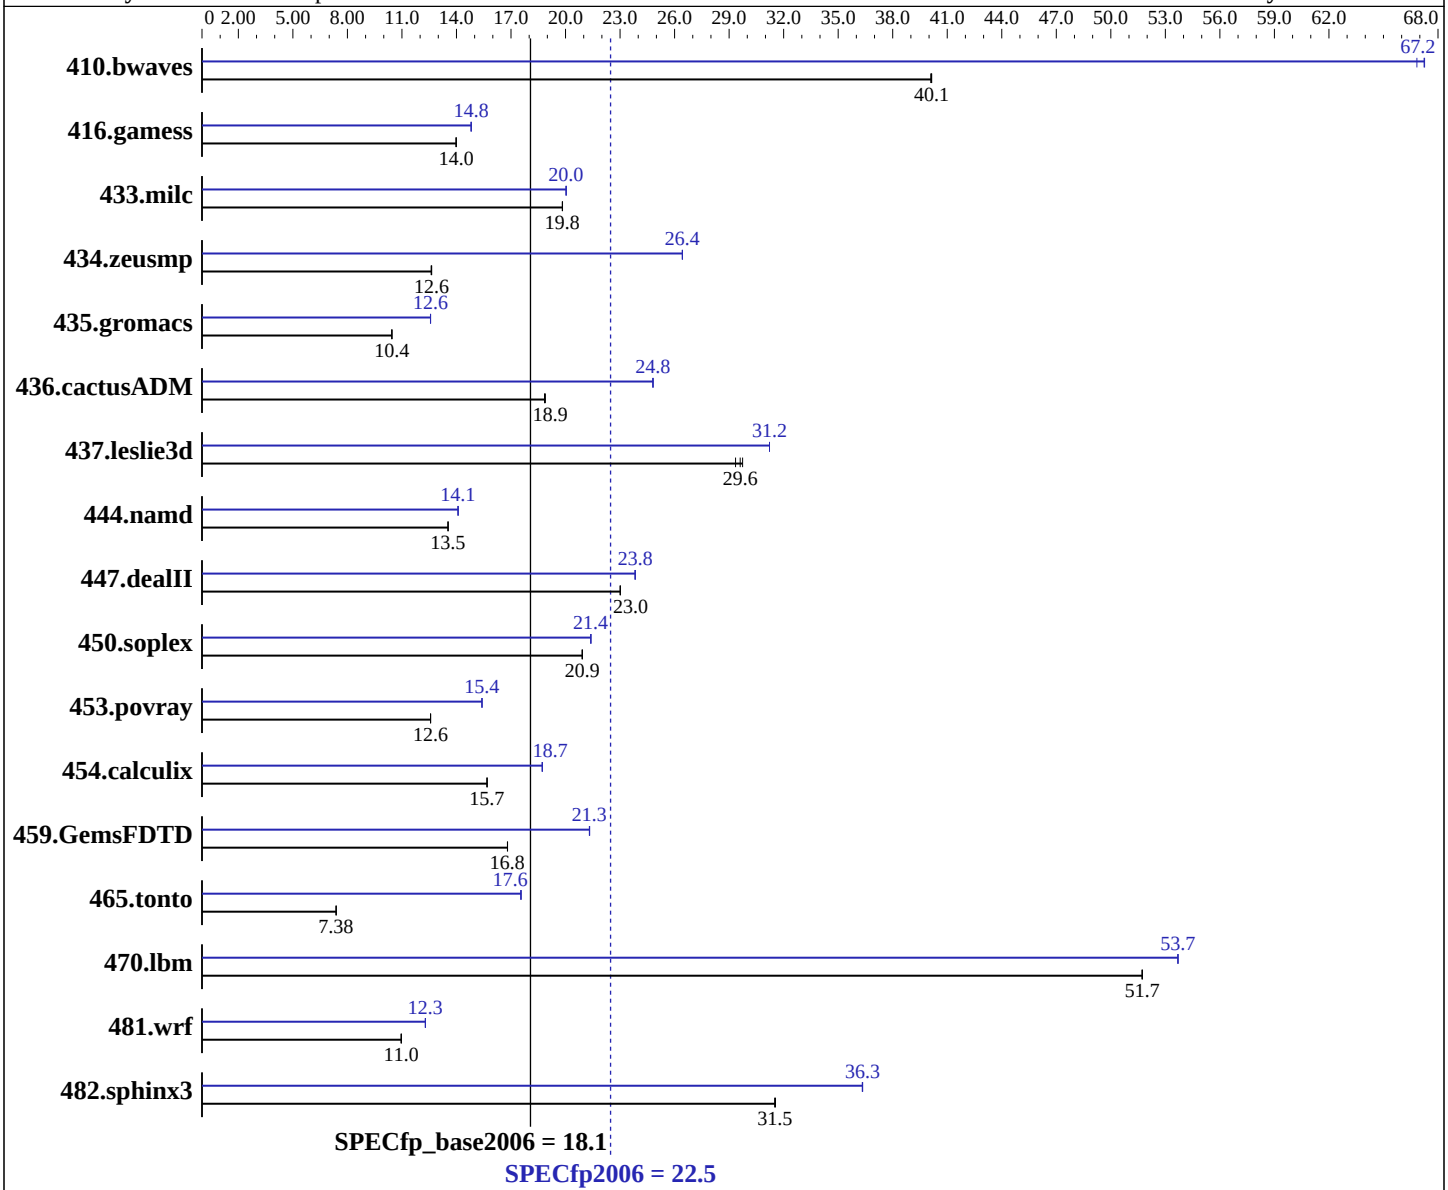

Hardware

CPU Name:	POWER6
CPU Characteristics:	
CPU MHz:	4700
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	2,4,8,12,16 cores
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Advanced Platform 5.1 for IBM POWER
Compiler:	IBM XL C/C++ Advanced Edition for Linux, V9.0 IBM XL Fortran Advanced Edition for Linux, V11.1
Auto Parallel:	No
File System:	ext3
System State:	Multi-User
Base Pointers:	32-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System p 570 (4.7 GHz, 1 core, RedHat)

SPECfp2006 = 22.5

SPECfp_base2006 = 18.1

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Oct-2007
Hardware Availability: Jun-2007
Software Availability: Oct-2007

L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 32 GB (16x2 GB) DDR2 667 MHz
Disk Subsystem: 2x73 GB SAS 15K RPM
Other Hardware: None

Other Software: -IBM Post-Link Optimization for Linux on POWER, Version 5.4.0-10
-MicroQuill SmartHeap 8.1
-IBM Engineering and Scientific Subroutine Library for Linux on POWER, Version 4.3

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	339	40.1	339	40.1	**339**	**40.1**	203	66.8	**202**	**67.2**	202	67.3
416.gamess	1400	14.0	**1400**	**14.0**	1401	14.0	1322	14.8	1322	14.8	**1322**	**14.8**
433.milc	463	19.8	**463**	**19.8**	463	19.8	**458**	**20.0**	458	20.0	458	20.0
434.zeusmp	720	12.6	722	12.6	**720**	**12.6**	**344**	**26.4**	344	26.4	344	26.4
435.gromacs	683	10.4	**683**	**10.4**	684	10.4	568	12.6	**568**	**12.6**	568	12.6
436.cactusADM	**634**	**18.9**	634	18.8	633	18.9	482	24.8	481	24.8	**482**	**24.8**
437.leslie3d	**317**	**29.6**	320	29.4	316	29.7	**301**	**31.2**	301	31.2	301	31.2
444.namd	592	13.5	592	13.5	**592**	**13.5**	569	14.1	569	14.1	**569**	**14.1**
447.dealII	497	23.0	497	23.0	**497**	**23.0**	480	23.8	480	23.8	**480**	**23.8**
450.soplex	399	20.9	399	20.9	**399**	**20.9**	390	21.4	390	21.4	**390**	**21.4**
453.povray	**423**	**12.6**	423	12.6	423	12.6	345	15.4	**345**	**15.4**	345	15.4
454.calculix	**526**	**15.7**	526	15.7	526	15.7	441	18.7	**441**	**18.7**	441	18.7
459.GemsFDTD	631	16.8	631	16.8	**631**	**16.8**	498	21.3	497	21.3	**498**	**21.3**
465.tonto	1333	7.38	1333	7.38	**1333**	**7.38**	561	17.6	**561**	**17.6**	561	17.5
470.lbm	266	51.7	266	51.7	**266**	**51.7**	256	53.7	256	53.7	**256**	**53.7**
481.wrf	1019	11.0	**1019**	**11.0**	1019	11.0	909	12.3	**909**	**12.3**	909	12.3
482.sphinx3	618	31.6	**618**	**31.5**	619	31.5	**536**	**36.3**	536	36.3	537	36.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
kernel release 2.6.18-52.el5.

See flags file for details on following settings.

ulimit -s (stack) set to 262144.


System set to Enhanced mode when defining partition on HMC

Large pages reserved as follows by root user:
    echo 200 > /proc/sys/vm/nr_hugepages
System configured with libhugetlbfs library for application access to large pages
Environment variables set before executing benchmarks.
    export HUGETLB_VERBOSE=0
```

Continued on next page

General Notes (Continued)

```
    export HUGETLB_MORECORE=yes
    export XLFRTEOPTS=intrinthds=1
Linux booted with the options:
       maxcpus=1 smt-enabled=off

fdpr binary optimization tool used for
    435.gromacs 436.cactusADM 482.sphinx3

Benchmarks bound to a processor using numactl on the submit command.
```

Base Compiler Invocation

C benchmarks:
```
xlc -qlanglvl=extc99
```

C++ benchmarks:
```
xlC
```

Fortran benchmarks:
```
xlf95
```

Benchmarks using both Fortran and C:
```
xlc -qlanglvl=extc99 xlf95
```

Base Portability Flags

410.bwaves: `-qfixed`
416.gamess: `-qfixed`
434.zeusmp: `-qfixed`
435.gromacs: `-qfixed -qextname`
436.cactusADM: `-qfixed -qextname`
437.leslie3d: `-qfixed`
454.calculix: `-qfixed -qextname`
481.wrf: `-DNOUNDERSCORE`
482.sphinx3: `-qchars=signed`

Base Optimization Flags

C benchmarks:
```
-O5 -qnoenablevmx -lhugetlbfs
```

C++ benchmarks:
```
-O5 -qrtti -qnoenablevmx -qstaticlink
```

Fortran benchmarks:
```
-O5 -qsmallstack=dynlenonheap -qalias=nostd -qnoenablevmx
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
```

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-O5 -qnoenablevmx -qsmallstack=dynlenonheap -qalias=nostd -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT`

Base Other Flags

C benchmarks:
`-qipa=noobject -qipa=threads`

C++ benchmarks:
`-qipa=noobject -qipa=threads`

Fortran benchmarks:
`-qipa=noobject -qipa=threads`

Benchmarks using both Fortran and C:
`-qipa=noobject -qipa=threads`

Peak Compiler Invocation

C benchmarks:
`xlc -qlanglvl=extc99`

C++ benchmarks:
`xlC`

Fortran benchmarks:
`xlf95`

Benchmarks using both Fortran and C:
`xlc -qlanglvl=extc99 xlf95`

Peak Portability Flags

410.bwaves: `-qfixed`
416.gamess: `-qfixed`
434.zeusmp: `-qfixed`
435.gromacs: `-qfixed -qextname`
436.cactusADM: `-qfixed -qextname`
437.leslie3d: `-qfixed`
454.calculix: `-qfixed -qextname`

Continued on next page

Peak Portability Flags (Continued)

481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT

470.lbm: -O3 -qarch=pwr6e -qtune=pwr6 -B/usr/share/libhugetlbfs/
-tl -Wl,--hugetlbfs-link=BDT -q64

482.sphinx3: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfs

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr6e -qtune=pwr6

447.dealII: -O5 -qrtti -qnoenablevmx -qstaticlink
-Wl,--whole-archive /usr/lib/libsmartheap.a
-Wl,--no-whole-archive

450.soplex: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qstrict -lhugetlbfs

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lsmartheap

Fortran benchmarks:

410.bwaves: -O5 -qsmallstack=dynlenonheap -lhugetlbfs

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qalias=nostd
-qnoenablevmx

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr6e -qtune=pwr6
-qxlf90=nosignedzero -B/usr/share/libhugetlbfs/ -tl
-Wl,--hugetlbfs-link=BDT

437.leslie3d: -O3 -qarch=pwr6e -qtune=pwr6 -B/usr/share/libhugetlbfs/
-tl -Wl,--hugetlbfs-link=BDT -q64

459.GemsFDTD: -qpdf1(pass 1) -qpdf2(pass 2) -O5
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
-q64

465.tonto: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lessl -lsmartheap
-lxlf90_r

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `-Wl,-q -O2 -qarch=pwr6e -qtune=pwr6 -lhugetlbfs`

436.cactusADM: `-Wl,-q -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O2 -qarch=pwr6e -qtune=pwr6 -lhugetlbfs`

454.calculix: `-qpdf1`(pass 1) `-qpdf2`(pass 2) `-O4 -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT`

481.wrf: `-O5 -qnoenablevmx -qalias=nostd -lhugetlbfs`

Peak Other Flags

C benchmarks:
`-qipa=noobject -qipa=threads`

C++ benchmarks:
`-qipa=noobject -qipa=threads`

Fortran benchmarks:
`-qipa=noobject -qipa=threads`

Benchmarks using both Fortran and C:
`-qipa=noobject -qipa=threads`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/lop-xl-flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/lop-xl-flags.20090714.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:28:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.