SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5450, 3.00 GHz)

SPECint®_rate2006 = 134

SPECint_rate_base2006 = 109

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

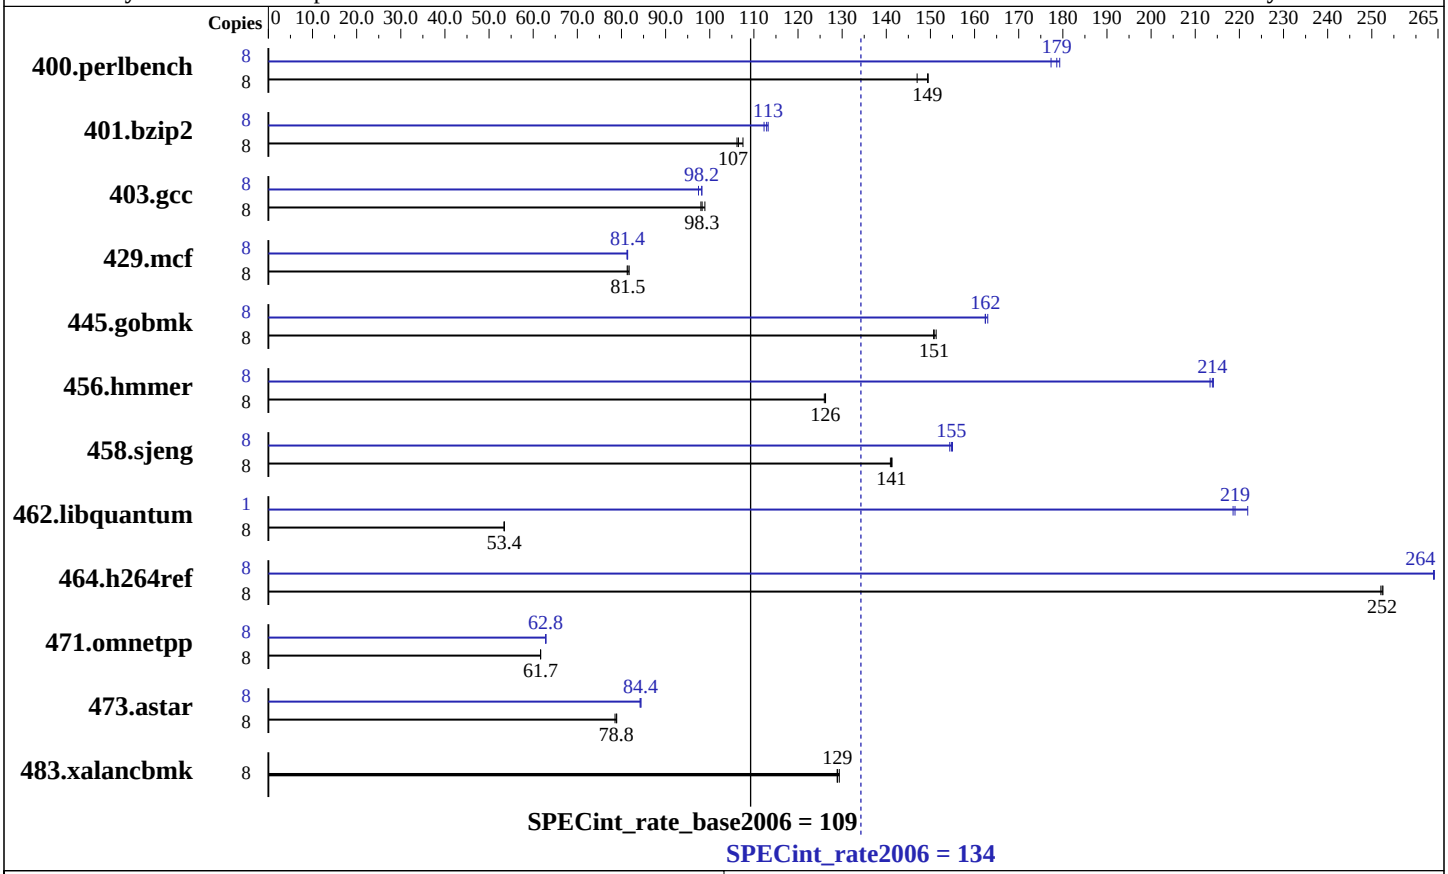

Hardware

CPU Name:	Intel Xeon E5450
CPU Characteristics:	Quad Core, 3.00 GHz
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 * 2GB DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73GB Seagate ST37330LC SCSI 10K RPM
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10 SP1 RC1, Kernel linux-cbgm 2.6.16.43-0.5-smp for x86_64
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap library V8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5450, 3.00 GHz)

SPECint_rate2006 = 134

SPECint_rate_base2006 = 109

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**523**	**149**	532	147	523	150	8	436	179	441	177	**438**	**179**
401.bzip2	8	**725**	**107**	718	108	727	106	8	682	113	**684**	**113**	687	112
403.gcc	8	651	98.9	**655**	**98.3**	657	98.0	8	661	97.5	656	98.2	**656**	**98.2**
429.mcf	8	893	81.7	897	81.3	**896**	**81.5**	8	898	81.2	896	81.4	**897**	**81.4**
445.gobmk	8	555	151	557	151	**556**	**151**	8	**517**	**162**	517	162	515	163
456.hmmer	8	**591**	**126**	591	126	593	126	8	350	213	349	214	**349**	**214**
458.sjeng	8	685	141	**686**	**141**	687	141	8	**626**	**155**	627	154	625	155
462.libquantum	8	3102	53.4	**3102**	**53.4**	3102	53.4	1	93.4	222	**94.6**	**219**	94.8	219
464.h264ref	8	**702**	**252**	701	253	702	252	8	670	264	671	264	**671**	**264**
471.omnetpp	8	811	61.7	**811**	**61.7**	811	61.7	8	796	62.8	**796**	**62.8**	795	62.9
473.astar	8	712	78.9	**712**	**78.8**	715	78.5	8	665	84.4	667	84.2	**666**	**84.4**
483.xalancbmk	8	**428**	**129**	427	129	428	129	8	**428**	**129**	427	129	428	129

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Bios settings:
Hardware Prefetcher:      Enabled
Adjacent Sector Prefetch: Disabled
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
The taskset utility was used to bind processes to cores
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

456.hmmer:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.36.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.36.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:41:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 December 2007.