SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECint®_rate2006 = 33.9

SPECint_rate_base2006 = 31.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2007
Hardware Availability: Jan-2008
Software Availability: Nov-2007

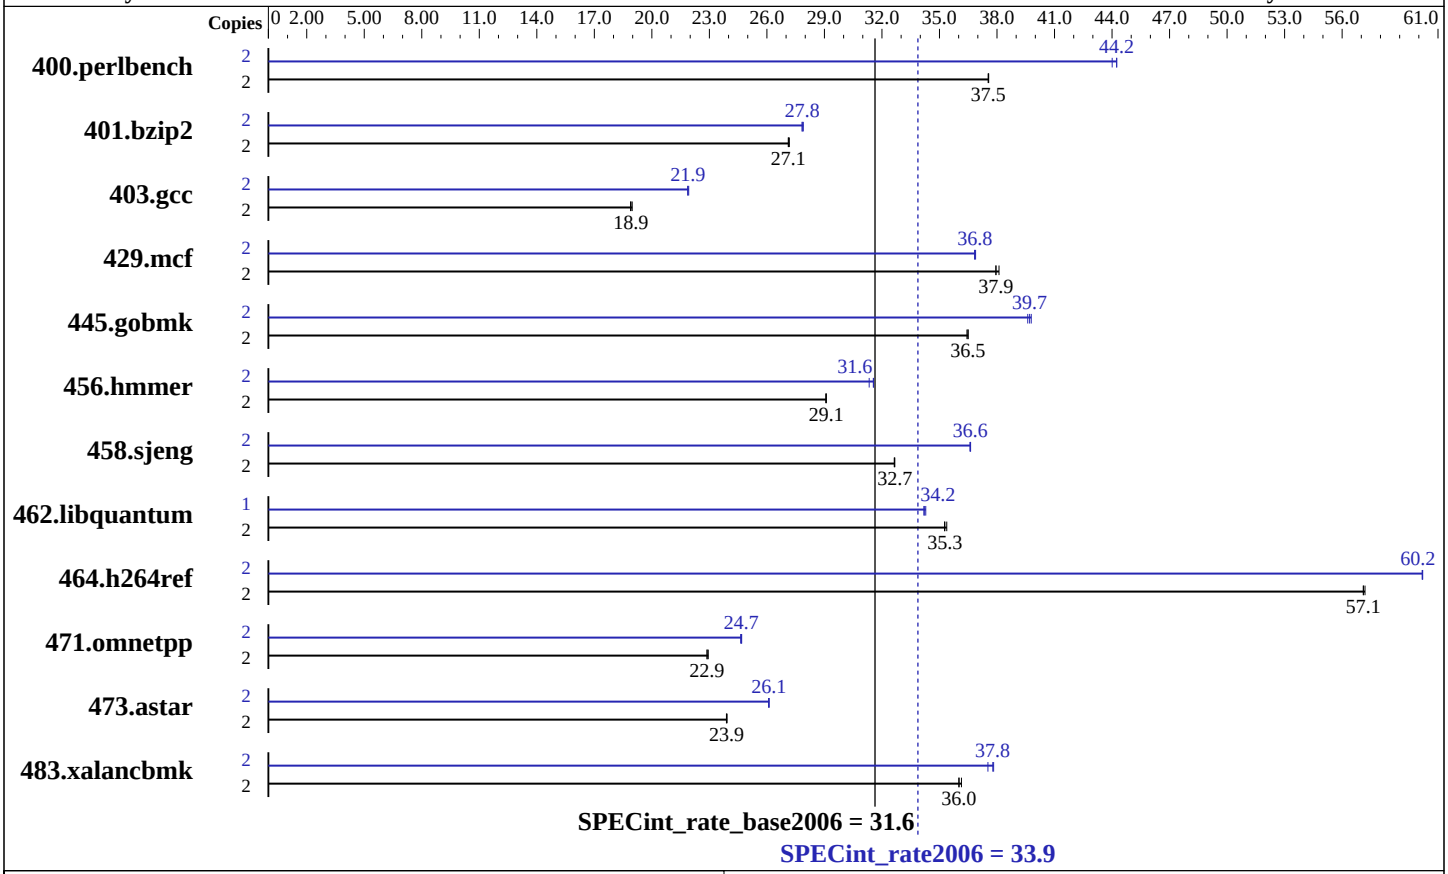

Hardware

CPU Name:	Intel Core 2 Extreme X9000
CPU Characteristics:	800 MHz Bus Speed
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	4 GB (2x2 GB 667 MHz CL5 DDR2)
Disk Subsystem:	1 x 120GB SATA 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows XP Professional x64 Edition SP2
Compiler:	Intel C++ Compiler for IA-32, Version 10.1 Build 20070913 Package ID: w_cc_p_10.1.011 Microsoft Visual Studio 2005 SP1
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECint_rate2006 = 33.9

SPECint_rate_base2006 = 31.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2007
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	**520**	**37.5**	520	37.6	520	37.5	2	442	44.2	**442**	**44.2**	444	44.0
401.bzip2	2	710	27.2	712	27.1	**712**	**27.1**	2	693	27.8	692	27.9	**693**	**27.8**
403.gcc	2	**851**	**18.9**	852	18.9	849	19.0	2	734	21.9	736	21.9	**736**	**21.9**
429.mcf	2	479	38.1	481	37.9	**481**	**37.9**	2	**495**	**36.8**	495	36.9	495	36.8
445.gobmk	2	575	36.5	576	36.4	**575**	**36.5**	2	527	39.8	530	39.6	**528**	**39.7**
456.hmmer	2	642	29.1	641	29.1	**641**	**29.1**	2	591	31.6	**591**	**31.6**	596	31.3
458.sjeng	2	741	32.7	741	32.6	**741**	**32.7**	2	661	36.6	**661**	**36.6**	661	36.6
462.libquantum	2	1171	35.4	1175	35.3	**1175**	**35.3**	1	**605**	**34.2**	606	34.2	604	34.3
464.h264ref	2	775	57.1	774	57.2	**775**	**57.1**	2	735	60.2	**735**	**60.2**	735	60.2
471.omnetpp	2	545	22.9	546	22.9	**546**	**22.9**	2	508	24.6	**507**	**24.7**	506	24.7
473.astar	2	587	23.9	**588**	**23.9**	588	23.9	2	**538**	**26.1**	538	26.1	538	26.1
483.xalancbmk	2	**383**	**36.0**	382	36.1	383	36.0	2	**365**	**37.8**	368	37.5	365	37.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Binaries were built on Windows Vista Ultimate (64-bit)
```

Base Compiler Invocation

C benchmarks:

```
icl -Qstd=c99
```

C++ benchmarks:

```
icl
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:

```
-fast -Qvec-guard-write /F512000000 shlw32m.lib
      -link /FORCE:MULTIPLE
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qstd=c99
```

C++ benchmarks:
```
icl
```

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qansi-alias -Qprefetch /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

401.bzip2: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qprefetch /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

403.gcc: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast /F512000000 -link /FORCE:MULTIPLE`

429.mcf: Same as 401.bzip2

445.gobmk: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-QxT -O2 -Qipo -Qprec-div- -Qansi-alias /F512000000 -link /FORCE:MULTIPLE`

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2 -Qansi-alias -Qopt-multi-version-aggressive /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4 /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

462.libquantum: -fast -Qunroll4 -Ob0 -Qprefetch -Qopt-streaming-stores:always -Qparallel -Qpar-runtime-control /F512000000 shlw32mt.lib -link /FORCE:MULTIPLE

464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2 -Qansi-alias /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qopt-ra-region-strategy=block -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qopt-ra-region-strategy=routine -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.01.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.01.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECint_rate2006 = 33.9

SPECint_rate_base2006 = 31.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2007
Hardware Availability: Jan-2008
Software Availability: Nov-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:19:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 January 2008.