SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T605 (AMD Opteron 2352, 2.10 GHz)

SPECint®_rate2006 = 94.7

SPECint_rate_base2006 = 82.4

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2008
Hardware Availability: Apr-2008
Software Availability: May-2008

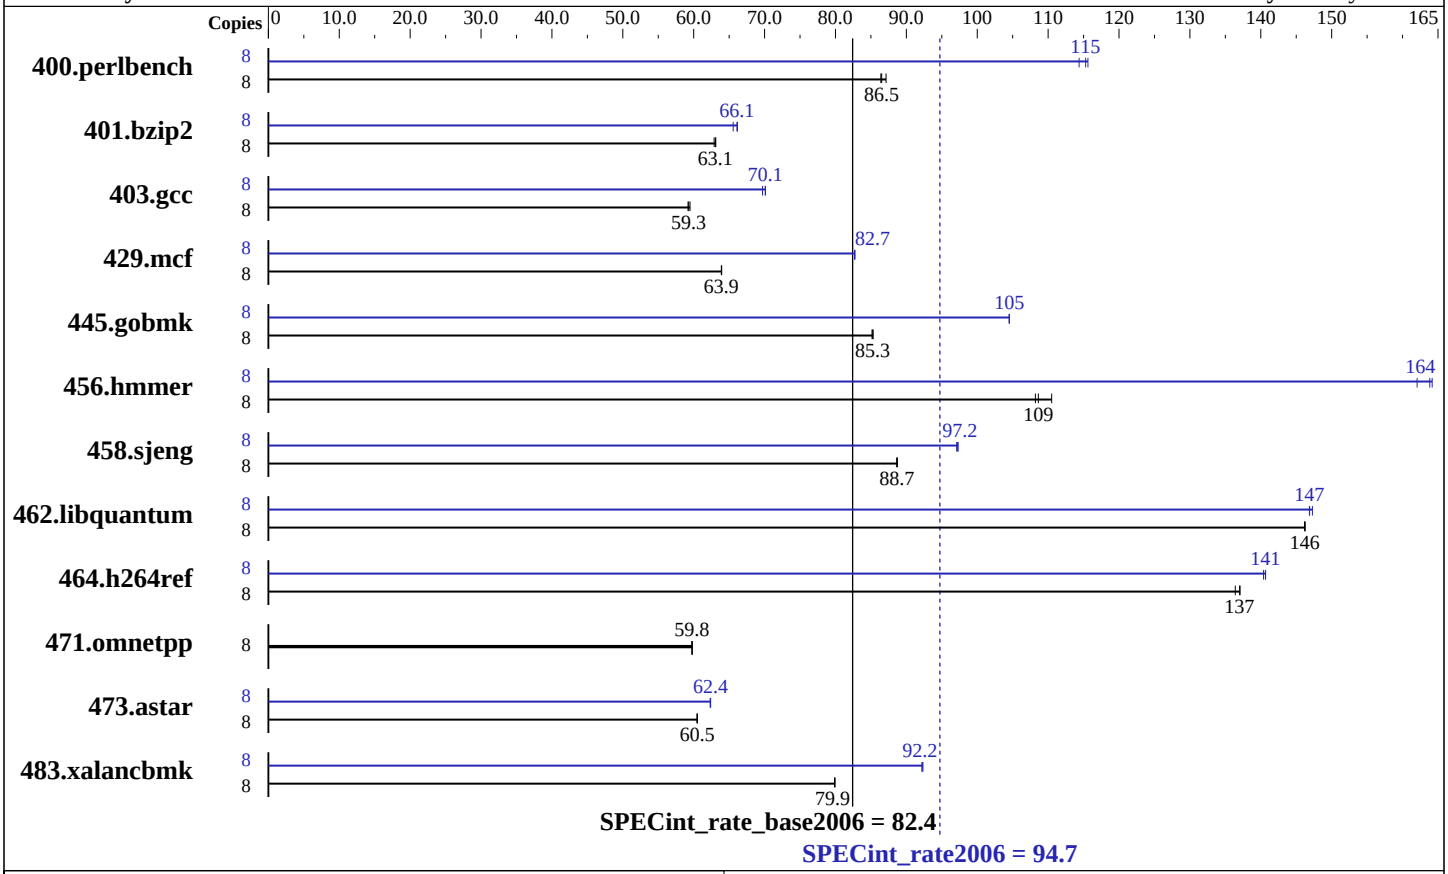

Hardware

CPU Name:	AMD Opteron 2352
CPU Characteristics:	
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (4 x 4 GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem:	2 x 250 GB 7200 RPM SATA (RAID 0)
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ReiserFS
System State:	Run Level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T605 (AMD Opteron 2352, 2.10 GHz)

SPECint_rate2006 = 94.7

SPECint_rate_base2006 = 82.4

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2008
Hardware Availability: Apr-2008
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	897	87.1	**903**	**86.5**	905	86.4	8	683	114	**678**	**115**	676	116
401.bzip2	8	**1224**	**63.1**	1223	63.1	1228	62.9	8	1177	65.6	**1168**	**66.1**	1167	66.2
403.gcc	8	1088	59.2	**1086**	**59.3**	1083	59.5	8	924	69.7	918	70.1	**919**	**70.1**
429.mcf	8	1142	63.9	**1142**	**63.9**	1141	64.0	8	882	82.7	882	82.7	**882**	**82.7**
445.gobmk	8	985	85.2	984	85.3	**984**	**85.3**	8	**803**	**105**	803	105	803	105
456.hmmer	8	**687**	**109**	690	108	675	111	8	461	162	455	164	**456**	**164**
458.sjeng	8	1092	88.6	**1091**	**88.7**	1091	88.7	8	995	97.3	**996**	**97.2**	997	97.1
462.libquantum	8	**1134**	**146**	1134	146	1133	146	8	1125	147	1129	147	**1128**	**147**
464.h264ref	8	**1292**	**137**	1298	136	1292	137	8	1261	140	1258	141	**1259**	**141**
471.omnetpp	8	837	59.8	836	59.8	**836**	**59.8**	8	837	59.8	836	59.8	**836**	**59.8**
473.astar	8	928	60.5	929	60.5	**928**	**60.5**	8	901	62.3	900	62.4	**900**	**62.4**
483.xalancbmk	8	**691**	**79.9**	691	79.9	691	79.9	8	**598**	**92.2**	599	92.2	598	92.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set /proc/sys/vm/nr_hugepages=1200
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi`

C++ benchmarks:
`-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-w`

C++ benchmarks:
`-w`

Peak Compiler Invocation

C benchmarks (except as noted below):
`pgcc`

400.perlbench: `pathcc`

403.gcc: `pathcc`

445.gobmk: `pathcc`

C++ benchmarks (except as noted below):
`pathCC`

471.omnetpp: `pgcpp`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1
-Msmartalloc=huge:150 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const
-Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64
-Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)
-fastsse -Msmartalloc=huge:150 -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg
-tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=barcelona -Ofast -TENV:frame_pointer=off -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525 -m32 -lsmartheap`

483.xalancbmk: `-march=barcelona -Ofast -m32 -OPT:unroll_times_max=8 -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -lsmartheap`

Peak Other Flags

C benchmarks (except as noted below):
`-w`

400.perlbench: `No flags used`

403.gcc: `No flags used`

445.gobmk: `No flags used`

C++ benchmarks (except as noted below):
`-L/root/work/cpu2006/amd123GH.libs/32`

471.omnetpp: `-w`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 16:52:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 April 2008.