SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 975)

SPECint®_rate2006 = 90.8

SPECint_rate_base2006 = 82.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Dec-2009
Hardware Availability: Feb-2011
Software Availability: Apr-2011

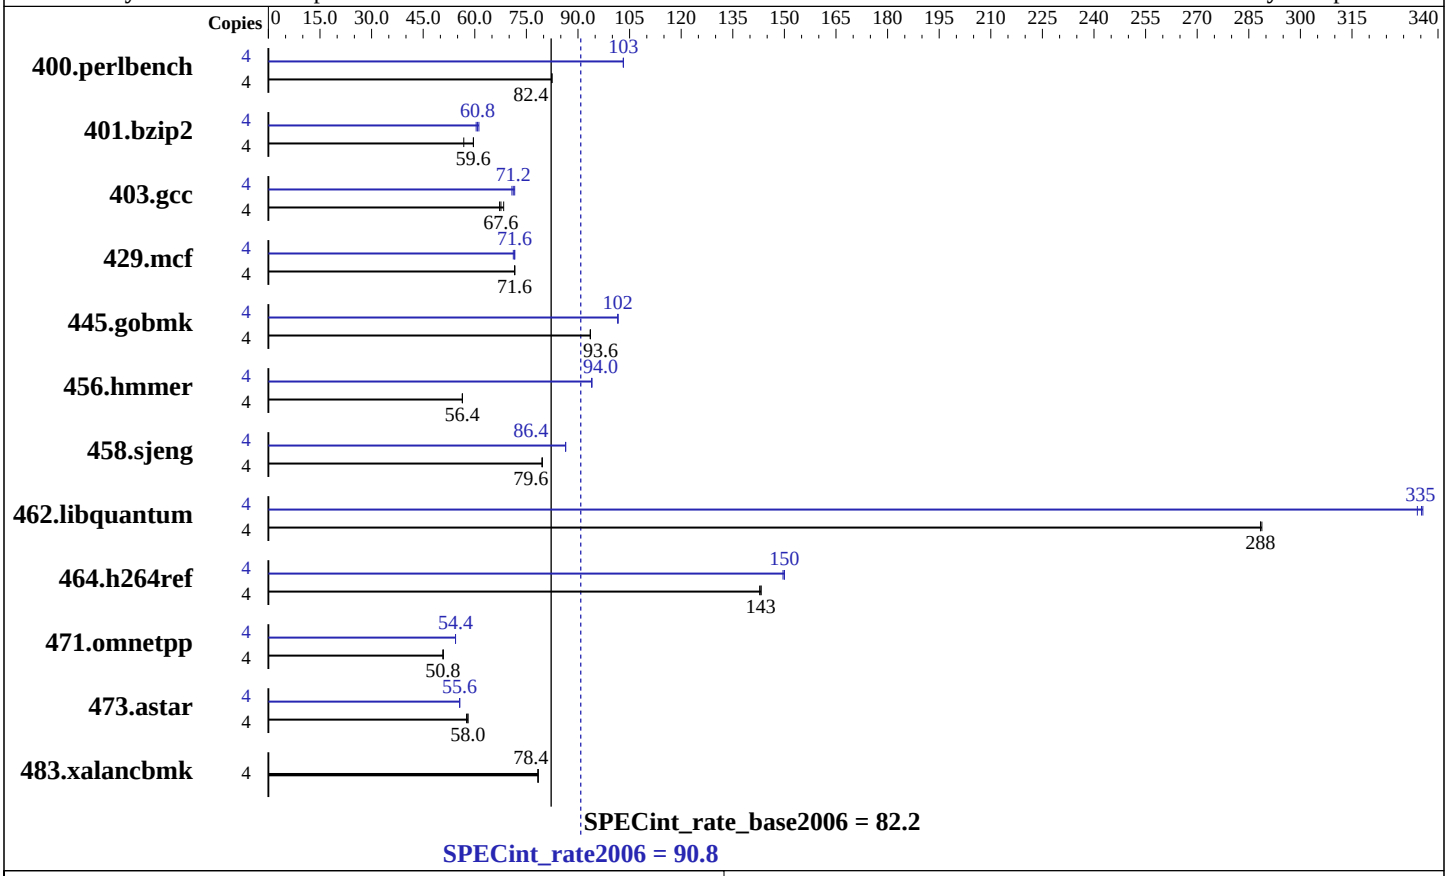

Hardware

CPU Name:	AMD Phenom II X4 975
CPU Characteristics:	
CPU MHz:	3600
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	4 GB (2 x 2 GB 2Rx4 PC3-10600U-9)
Disk Subsystem:	1 TB Seagate SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows 7 Ultimate (64-bit)
Compiler:	Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.176 Build 20110309 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 9.01 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

ASUSTek M4A89GTD PRO/USB3 (Phenom II X4 975)

SPECint_rate2006 = 90.8

SPECint_rate_base2006 = 82.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Dec-2009
Hardware Availability: Feb-2011
Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	474	82.4	**473**	**82.4**	473	82.4	4	378	103	**378**	**103**	379	103
401.bzip2	4	681	56.8	646	59.6	**649**	**59.6**	4	**635**	**60.8**	639	60.4	631	61.2
403.gcc	4	472	68.4	**476**	**67.6**	478	67.2	4	**452**	**71.2**	451	71.6	454	70.8
429.mcf	4	511	71.6	**511**	**71.6**	510	71.6	4	510	71.6	511	71.2	**510**	**71.6**
445.gobmk	4	448	93.6	**448**	**93.6**	448	93.6	4	414	102	413	102	**413**	**102**
456.hmmer	4	**660**	**56.4**	660	56.4	660	56.4	4	397	94.0	397	94.0	**397**	**94.0**
458.sjeng	4	**609**	**79.6**	610	79.6	608	79.6	4	561	86.4	561	86.4	**561**	**86.4**
462.libquantum	4	287	289	**287**	**288**	287	288	4	248	334	247	336	**247**	**335**
464.h264ref	4	619	143	618	143	**619**	**143**	4	591	150	**591**	**150**	591	150
471.omnetpp	4	493	50.8	**494**	**50.8**	494	50.8	4	**459**	**54.4**	459	54.4	459	54.4
473.astar	4	488	57.6	486	58.0	**486**	**58.0**	4	505	55.6	**505**	**55.6**	506	55.6
483.xalancbmk	4	351	78.4	**351**	**78.4**	351	78.4	4	351	78.4	**351**	**78.4**	351	78.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 The start command with the /affinity switch was used to bind processes to cores
```

General Notes

```
 Tested systems can be used with Shin-G ATX case,
 PC Power and Cooling 1200W power supply
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc9
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
/arch:SSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

C++ benchmarks:
```
/arch:SSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlW32M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icl -Qvc9 -Qstd=c99
```

456.hmmer: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

458.sjeng: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

462.libquantum: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe -Qstd=c99`

C++ benchmarks (except as noted below):
```
icl -Qvc9
```

473.astar: `C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
456.hmmer: `-DSPEC_CPU_P64`
458.sjeng: `-DSPEC_CPU_P64`
462.libquantum: `-DSPEC_CPU_P64`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
473.astar: `-DSPEC_CPU_P64`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: /arch:SSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

458.sjeng: -Qauto-ilp32 /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -Qauto-ilp32 /arch:SSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

464.h264ref: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 /arch:SSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

456.hmmer: `-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

458.sjeng: `-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

462.libquantum: `-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

C++ benchmarks:

473.astar: `-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.html`
`http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.xml`
`http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 22:22:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 September 2011.