SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Rackable C2108-G9 (AMD Opteron 6344, 2.60 GHz)

SPECint®_rate2006 = 440

SPECint_rate_base2006 = 395

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Sep-2013
Hardware Availability: Mar-2013
Software Availability: Feb-2013

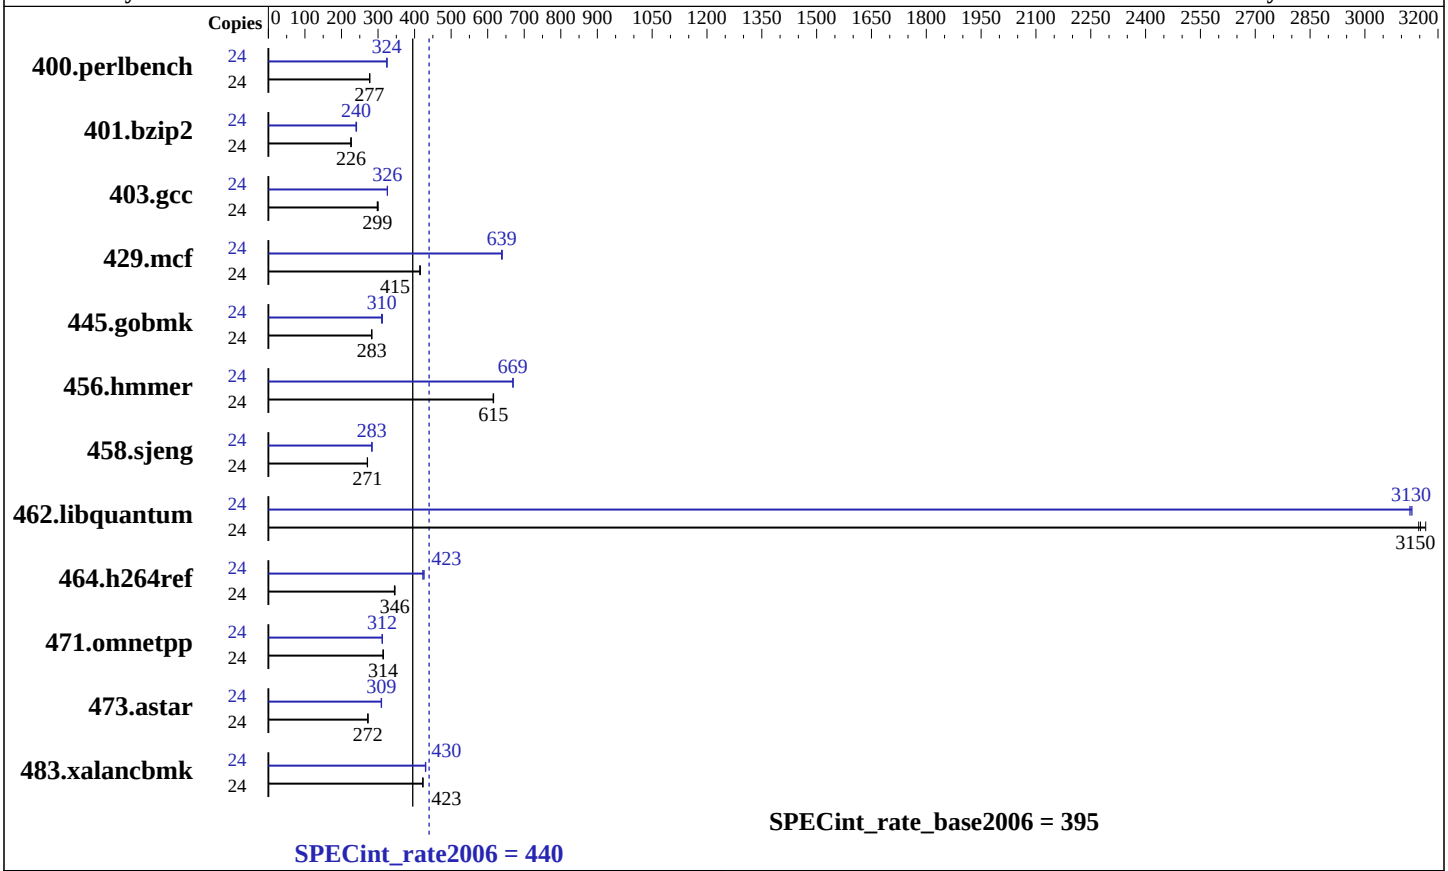

Hardware

CPU Name:	AMD Opteron 6344
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	384 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache:	None
Memory:	64 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 3000 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4, (Santiago) Kernel version 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 10.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Rackable C2108-G9 (AMD Opteron 6344, 2.60 GHz)

SPECint_rate2006 = 440

SPECint_rate_base2006 = 395

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Sep-2013
Hardware Availability: Mar-2013
Software Availability: Feb-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	847	277	**847**	**277**	844	278	24	724	324	**723**	**324**	723	324
401.bzip2	24	**1023**	**226**	1022	227	1027	226	24	960	241	965	240	**964**	**240**
403.gcc	24	**647**	**299**	649	298	643	300	24	**593**	**326**	593	326	594	325
429.mcf	24	527	416	**528**	**415**	528	414	24	343	638	**342**	**639**	342	640
445.gobmk	24	889	283	**891**	**283**	892	282	24	807	312	813	310	**811**	**310**
456.hmmer	24	363	616	**364**	**615**	364	615	24	334	669	**335**	**669**	335	669
458.sjeng	24	1072	271	1070	271	**1072**	**271**	24	1024	284	1027	283	**1025**	**283**
462.libquantum	24	**158**	**3150**	158	3150	157	3170	24	159	3120	159	3130	**159**	**3130**
464.h264ref	24	**1537**	**346**	1533	346	1540	345	24	1246	426	**1256**	**423**	1256	423
471.omnetpp	24	477	314	**477**	**314**	478	314	24	481	312	482	311	**481**	**312**
473.astar	24	618	273	619	272	**619**	**272**	24	544	310	545	309	**545**	**309**
483.xalancbmk	24	392	423	392	423	**392**	**423**	24	385	430	385	430	**385**	**430**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Huge pages were not configured for this run.
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/data1/cpu2006-v1.2/amd1206-rate-libs-revA/32:/data1/cpu2006-v1.2/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1`

462.libquantum: `-Ofast -mso -OPT:unroll_size=512 -OPT:unroll_times_max=16 -LNO:prefetch=2 -LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1 -CG:p2align=0 -INLINE:aggressive=ON -IPA:plimit=15000 -IPA:small_pu=100 -HP:bdt=2m:heap=2m,limit=300 -march=bdver2`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:unroll_size=256 -OPT:unroll_times_max=2 -IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0 -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1`

C++ benchmarks:

471.omnetpp: `-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -WOPT:sib=on -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

473.astar: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on -CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on -OPT:alias=disjoint -INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m -march=bdver1`

483.xalancbmk: `-Ofast -LNO:prefetch=2 -OPT:unroll_size=512 -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET -INLINE:aggressive=on -m32 -CG:cmp_peep=on -CG:local_sched=off -CG:p2align=1 -GRA:unspill=on -TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2 -mno-fma4 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 17:15:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2013.