SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3
(AMD Opteron 6344, 2.60 GHz)

SPECint®_rate2006 = 448

SPECint_rate_base2006 = 393

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Apr-2014
Hardware Availability: Dec-2013
Software Availability: Aug-2012

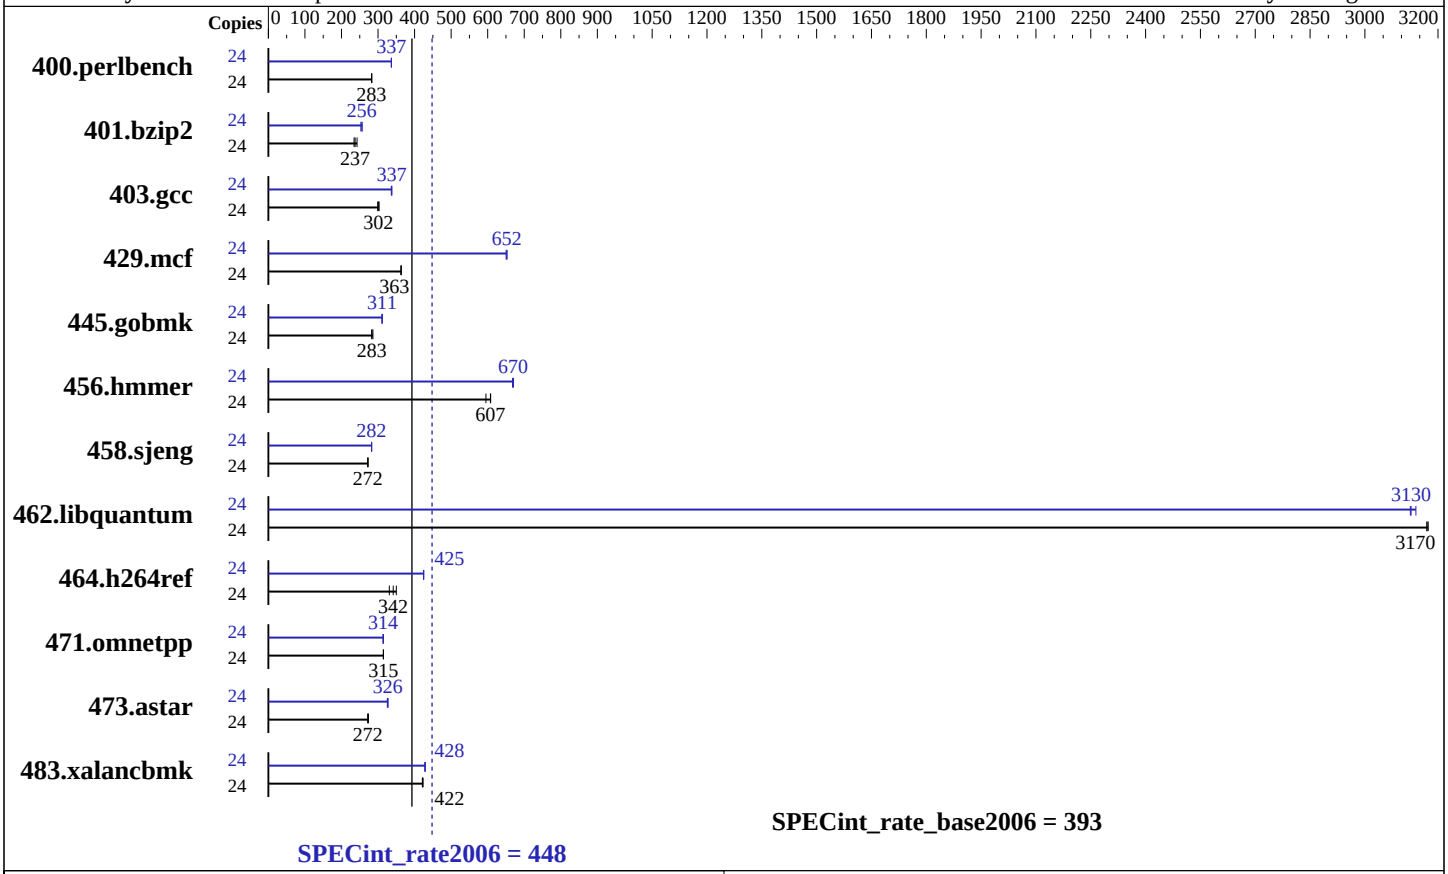

Hardware

CPU Name:	AMD Opteron 6344
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	384 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem:	1 x 600 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 10.0 32-bit Library for Linux

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	830	282	829	283	**830**	**283**	24	696	337	697	336	**697**	**337**
401.bzip2	24	**976**	**237**	988	234	955	243	24	903	256	**905**	**256**	915	253
403.gcc	24	**640**	**302**	646	299	638	303	24	**573**	**337**	572	338	575	336
429.mcf	24	**603**	**363**	603	363	603	363	24	337	650	**335**	**652**	335	653
445.gobmk	24	890	283	**889**	**283**	880	286	24	**809**	**311**	810	311	809	311
456.hmmer	24	368	608	376	595	**369**	**607**	24	334	671	**334**	**670**	335	668
458.sjeng	24	1066	272	**1067**	**272**	1067	272	24	**1028**	**282**	1029	282	1027	283
462.libquantum	24	157	3170	**157**	**3170**	157	3170	24	**159**	**3130**	158	3140	159	3120
464.h264ref	24	**1555**	**342**	1517	350	1605	331	24	**1251**	**425**	1249	425	1251	425
471.omnetpp	24	**476**	**315**	476	315	477	314	24	**477**	**314**	477	315	478	314
473.astar	24	**619**	**272**	619	272	615	274	24	515	327	**516**	**326**	518	325
483.xalancbmk	24	391	423	393	421	**393**	**422**	24	**387**	**428**	386	429	387	428

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=21504 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
 BIOS setting:
 Operating Mode set to Performance
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1206-rate-libs-revA/32:/cpu2006/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
```

Continued on next page

General Notes (Continued)

```
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast`
`-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off`
`-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2`
`-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1`

462.libquantum: `-Ofast -mso -OPT:unroll_size=512 -OPT:unroll_times_max=16`
`-LNO:prefetch=2 -LNO:prefetch_ahead=4 -LNO:pf2=0`
`-CG:local_sched_alg=1 -CG:p2align=0 -INLINE:aggressive=ON`
`-IPA:plimit=15000 -IPA:small_pu=100`
`-HP:bdt=2m:heap=2m,limit=300 -march=bdver2`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3`
`-OPT:unroll_size=256 -OPT:unroll_times_max=2`
`-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0`
`-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1`

C++ benchmarks:

471.omnetpp: `-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on`
`-WOPT:sib=on -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4`
`-L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

473.astar: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast`
`-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on`
`-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on`
`-OPT:alias=disjoint -INLINE:aggressive=on`
`-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m`
`-march=bdver1`

483.xalancbmk: `-Ofast -LNO:prefetch=2 -OPT:unroll_size=512`
`-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET`
`-INLINE:aggressive=on -m32 -CG:cmp_peep=on`
`-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on`
`-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2`
`-mno-fma4`
`-L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-AMD-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-AMD-A.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:20:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 May 2014.