SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A8 PRO-7600B with Radeon R7 Graphics)

SPECint®_rate2006 = 88.1

SPECint_rate_base2006 = 83.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2016
Hardware Availability: Jul-2014
Software Availability: Aug-2015

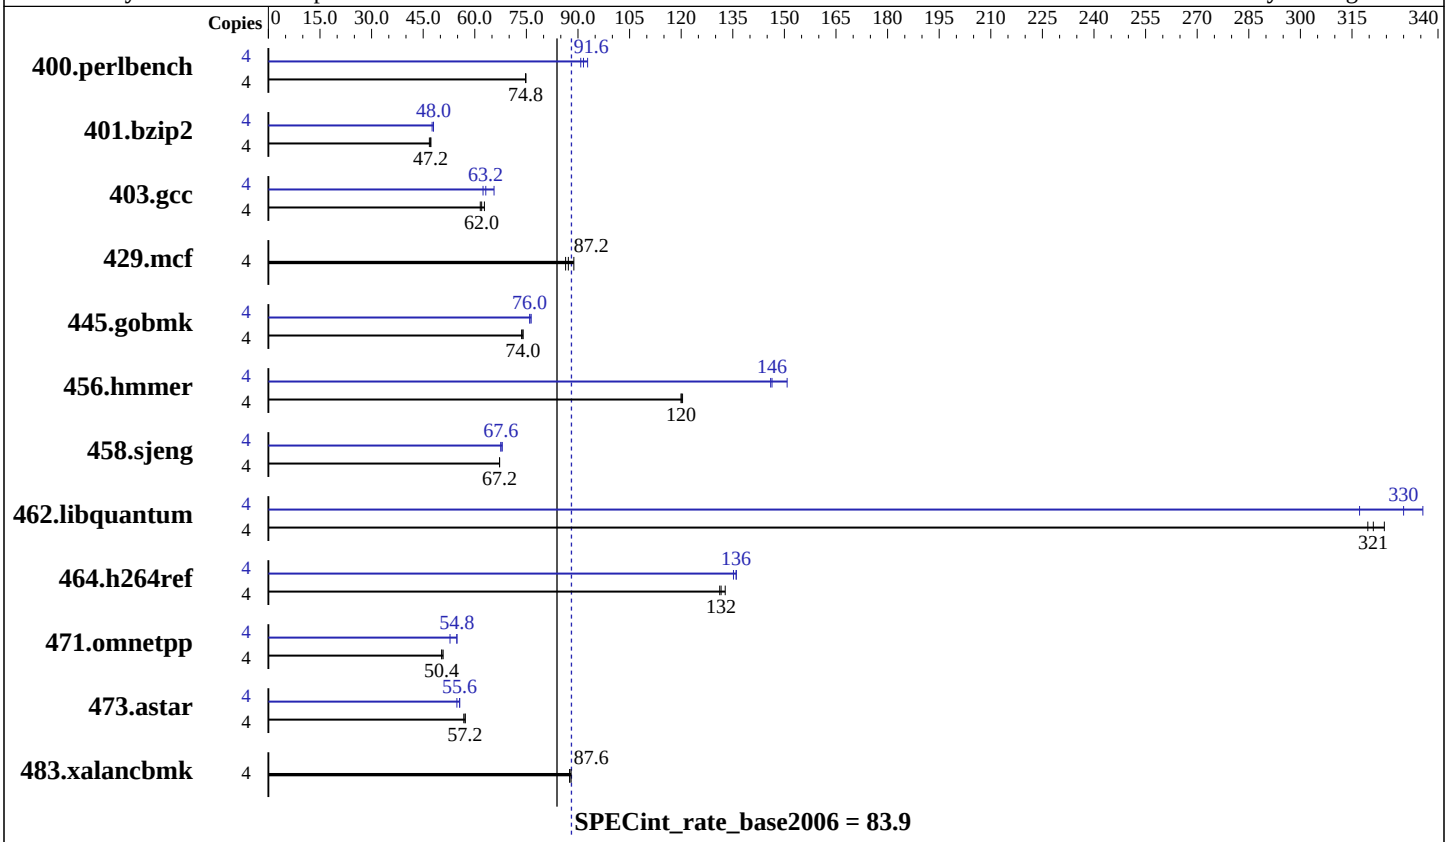

Hardware

CPU Name:	AMD A8 PRO-7600B
CPU Characteristics:	AMD Turbo CORE technology up to 3.80 GHz
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx8 PC3-10600U-11)
Disk Subsystem:	Seagate Barracuda 250 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 7 Ultimate 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 11.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A8 PRO-7600B with Radeon R7 Graphics)

SPECint_rate2006 = 88.1

SPECint_rate_base2006 = 83.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2016
Hardware Availability: Jul-2014
Software Availability: Aug-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	**524**	**74.8**	524	74.8	523	74.8	4	**428**	**91.6**	430	90.8	421	92.8
401.bzip2	4	**820**	**47.2**	822	46.8	817	47.2	4	811	47.6	**807**	**48.0**	803	48.0
403.gcc	4	**519**	**62.0**	513	62.8	522	61.6	4	**510**	**63.2**	492	65.6	516	62.4
429.mcf	4	411	88.8	422	86.4	**418**	**87.2**	4	411	88.8	422	86.4	**418**	**87.2**
445.gobmk	4	569	73.6	**568**	**74.0**	568	74.0	4	553	76.0	**552**	**76.0**	551	76.4
456.hmmer	4	310	120	311	120	**311**	**120**	4	**255**	**146**	248	151	256	146
458.sjeng	4	720	67.2	**720**	**67.2**	721	67.2	4	**715**	**67.6**	716	67.6	714	68.0
462.libquantum	4	255	324	259	320	**258**	**321**	4	261	317	247	336	**251**	**330**
464.h264ref	4	667	133	**674**	**132**	674	131	4	**652**	**136**	655	135	650	136
471.omnetpp	4	494	50.8	**495**	**50.4**	497	50.4	4	472	52.8	455	54.8	**456**	**54.8**
473.astar	4	491	57.2	494	56.8	**492**	**57.2**	4	514	54.8	506	55.6	**506**	**55.6**
483.xalancbmk	4	314	88.0	**315**	**87.6**	315	87.6	4	314	88.0	**315**	**87.6**	315	87.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 16.0 was set up to
generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2016 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC16.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Clt1C872C5DF572 Thu Jun  2 07:16:27 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name        : Microsoft Windows 7 Ultimate
OS Version     : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model   : System Product Name
Processor(s)   : 1 Processor(s) Installed.
     [01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3100 Mhz
BIOS Version   : American Megatrends Inc. 2502, 12/11/2015
Total Physical Memory: 7,108 MB

Trying 'wmic cpu get /value'
DeviceID       : CPU0
```

Continued on next page

Platform Notes (Continued)

```
L2CacheSize   : 25359
L3CacheSize   : 0
MaxClockSpeed : 3100
Name          : AMD A8 PRO-7600B R7, 10 Compute Cores 4C+6G
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
+ 64GB memory using Windows 8.1 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc12 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc12
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000
```

C++ benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F256000000 shlW32M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icl -Qvc12 -Qstd=c99`

456.hmmer: `C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe`

458.sjeng: `C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe`

462.libquantum: `C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe -Qstd=c99`

C++ benchmarks (except as noted below):
`icl -Qvc12`

473.astar: `C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe`

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
456.hmmer: `-DSPEC_CPU_P64`
458.sjeng: `-DSPEC_CPU_P64`
462.libquantum: `-DSPEC_CPU_P64`
464.h264ref: `-DWIN32`
473.astar: `-DSPEC_CPU_P64`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: `/arch:AVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F256000000 shlW32M.lib -link /FORCE:MULTIPLE`

401.bzip2: `/arch:AVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F256000000`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F256000000

456.hmmer: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo(1) -O3(1) -Qprec-div-(1)
-Qopt-prefetch(1) /F256000000

458.sjeng: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo(1) -O3(1) -Qprec-div-(1)
-Qunroll4(1) /F256000000

462.libquantum: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F256000000

464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F256000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F256000000 shlW32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F256000000 shlW64M.lib

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

456.hmmer: -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/compiler/lib/intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows\7.1A\Libd
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD6

458.sjeng: -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/compiler/lib/intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows\7.1A\Libd
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD6

462.libquantum: -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/compiler/lib/intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows\7.1A\Libd
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD6

Continued on next page

Peak Other Flags (Continued)

C++ benchmarks:

473.astar: -link /FORCE:MULTIPLE -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/compiler/lib/intel64 -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows77.1A\Lib

```
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD6
```

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 20 15:06:39 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 September 2016.