SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: Advanced Micro Devices)

HPE Cloudline CL3150,
AMD EPYC 7601

SPECint®_rate2006 = 1200

SPECint_rate_base2006 = 1060

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: May-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2016

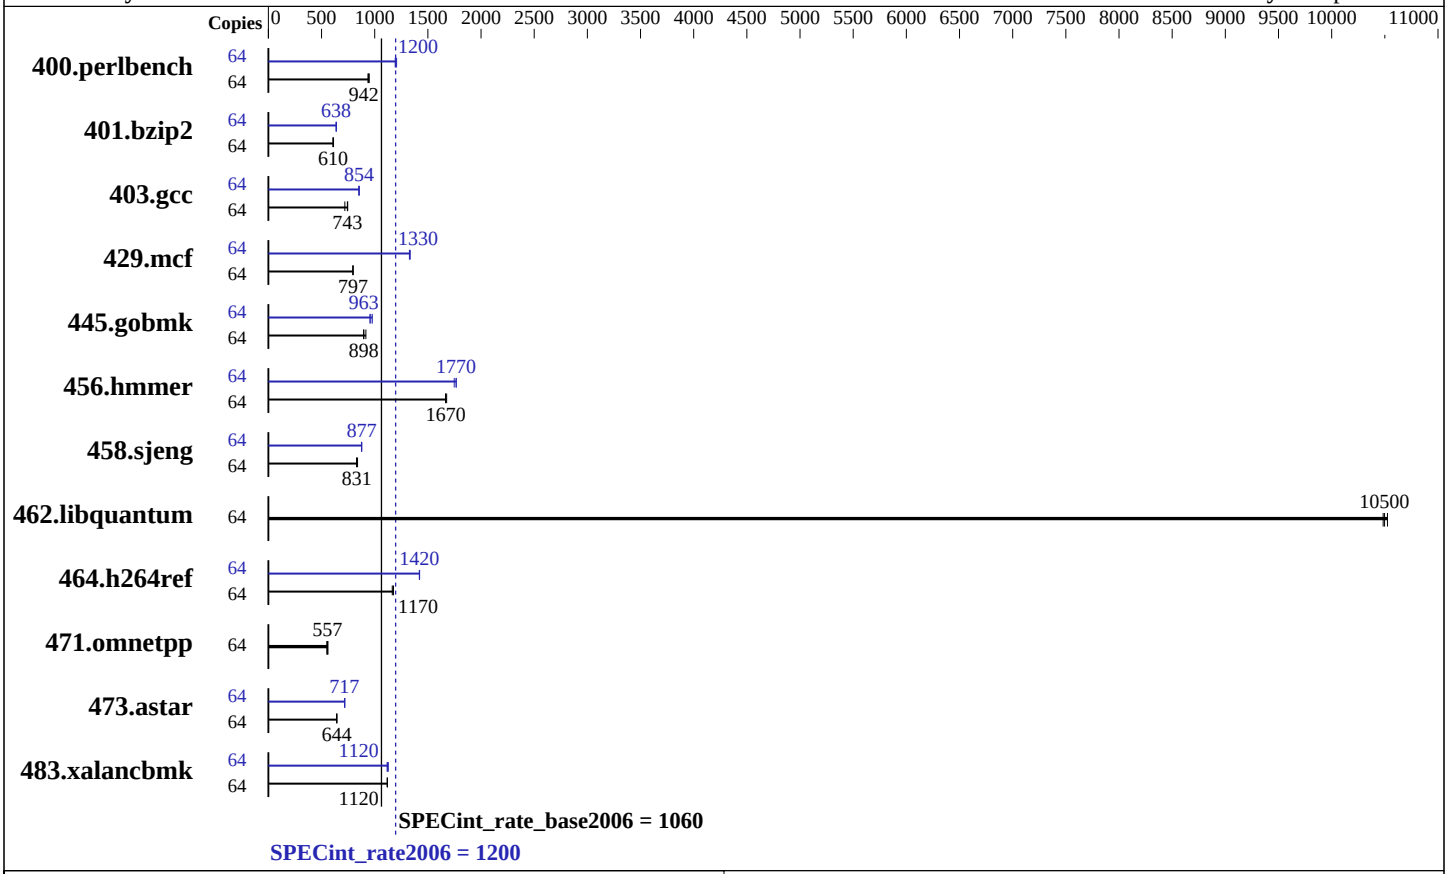

Hardware

CPU Name:	AMD EPYC 7601
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	32 cores, 1 chip, 32 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	64 MB I+D on chip per chip, 8 MB shared / 4 cores
Other Cache:	None
Memory:	256 GB (8 x 32 GB 2Rx4 PC4-2667V-R)
Disk Subsystem:	1 x 500 GB SSD
Other Hardware:	None

Software

Operating System:	Ubuntu 16.04 LTS, Kernel 4.4.0-71.generic
Compiler:	C/C++: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 10.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: Advanced Micro Devices)

HPE Cloudline CL3150,
AMD EPYC 7601

SPECint_rate2006 = 1200

SPECint_rate_base2006 = 1060

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: May-2017
Hardware Availability: Jul-2017
Software Availability: Apr-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	659	949	668	937	**664**	**942**	64	**522**	**1200**	519	1210	524	1190
401.bzip2	64	1008	613	1018	607	**1012**	**610**	64	**968**	**638**	965	640	970	637
403.gcc	64	716	719	690	746	**693**	**743**	64	**604**	**854**	604	854	606	851
429.mcf	64	**733**	**797**	735	794	733	797	64	**439**	**1330**	440	1330	438	1330
445.gobmk	64	750	895	732	917	**748**	**898**	64	703	955	**697**	**963**	687	977
456.hmmer	64	358	1670	**358**	**1670**	356	1680	64	342	1750	338	1770	**338**	**1770**
458.sjeng	64	**932**	**831**	933	830	923	839	64	882	878	885	875	**883**	**877**
462.libquantum	64	**126**	**10500**	126	10500	126	10500	64	**126**	**10500**	126	10500	126	10500
464.h264ref	64	1204	1180	1216	1160	**1207**	**1170**	64	996	1420	**997**	**1420**	998	1420
471.omnetpp	64	**718**	**557**	715	560	728	549	64	**718**	**557**	715	560	728	549
473.astar	64	698	644	**698**	**644**	699	642	64	**626**	**717**	625	719	627	717
483.xalancbmk	64	394	1120	395	1120	**395**	**1120**	64	395	1120	**394**	**1120**	392	1130

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runspec
Transparent huge pages were enabled for this run (OS default)
```

Platform Notes

```
The Linux run level was 3; sysinfo run-level is incorrect.
The dmidecode memory speed information is incorrect.
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1603-rate-libs-revA/32:/root/work/cpu2006/amd1603-rate-libs-revA/64"
The binaries were built with the AMD supported x86 Open64 Compiler Suite,
```

Continued on next page

General Notes (Continued)

```
which is only available from AMD at
http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/
Binaries were compiled on a system with 2x AMD Opteron 6378 chips + 128GB Memory using RHEL 6.3
Submitted_by: "Smith, Van" <Van.Smith@amd.com>
Submitted: Mon Jun  5 12:37:56 EDT 2017
Submission: cpu2006-20170529-47129.sub
Submitted_by: "Smith, Van" <Van.Smith@amd.com>
Submitted: Thu Jun  8 15:46:00 EDT 2017
Submission: cpu2006-20170529-47129.sub
```

Base Compiler Invocation

C benchmarks:
```
opencc
```

C++ benchmarks:
```
openCC
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm
```

C++ benchmarks:
```
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap
```

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-mno-fma4 -GRA:aggr_loop_splitting=off
-GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4 -WB, -mno-tbm
-mno-xop

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bdt=2m:heap=2m -mso -march=bdver1 -mno-fma4

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1 -mno-fma4

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1
-mno-fma4

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1 -mno-fma4

462.libquantum: basepeak = yes

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:unroll_size=256 -OPT:unroll_times_max=2
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1
-mno-fma4

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m
-march=bdver1 -mno-fma4

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
-mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 5 18:32:07 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 June 2017.