SPEC® OMPG2012 Result

Copyright 2012-2021 Standard Performance Evaluation Corporation

Intel

Intel Server System M70KLP (Intel Xeon Platinum 8360Y, 2.40 GHz)

SPECompG_peak2012 = 39.0

SPECompG_base2012 = 32.4

OMP2012 license: 13
Test sponsor: Intel
Tested by: Intel

Test date: Apr-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

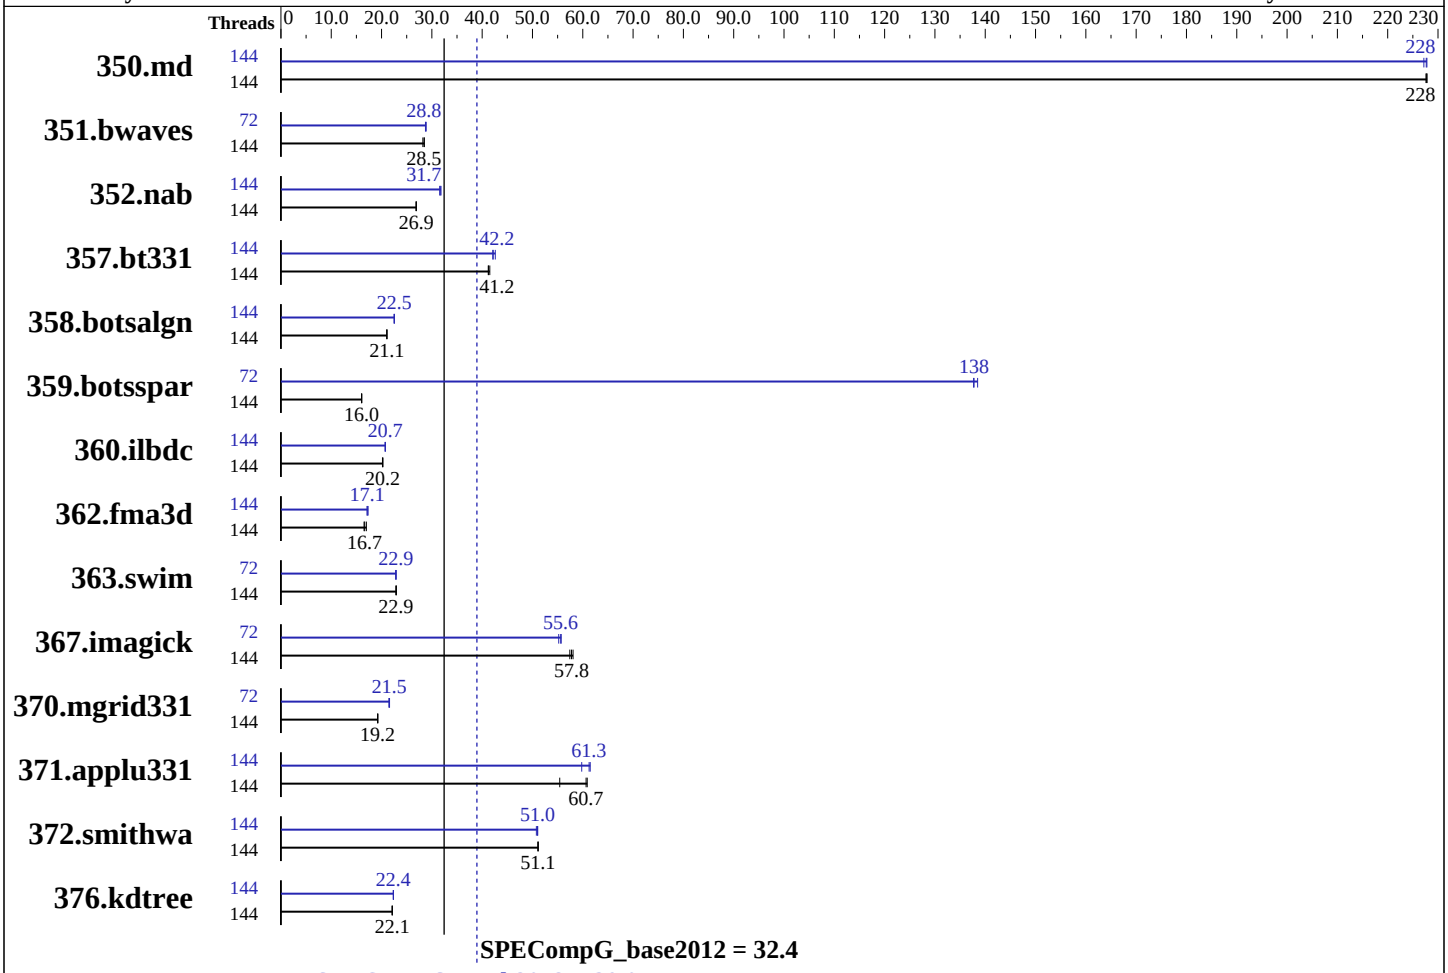

Hardware

CPU Name:	Intel Xeon Platinum 8360Y
CPU Characteristics:	Intel Turbo Boost Technology : Disabled
CPU MHz:	2400
CPU MHz Maximum:	3500
FPU:	Integrated
CPU(s) enabled:	72 cores, 2 chips, 36 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 Chips
Primary Cache:	32 KB I + 48 KB D on chip per core
Secondary Cache:	1.25 MB I+D on chip per core
L3 Cache:	54 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx8 DDR4-3200Y-R)
Disk Subsystem:	SSDSC2KG96 960GB
Other Hardware:	--
Base Threads Run:	144
Minimum Peak Threads:	72

Continued on next page

Software

Operating System:	CentOS Linux release 8.3.2011 (Core)
Compiler:	C/C++/Fortran: Version 2021.2.0.2883 of Intel Composer XE for Linux
Auto Parallel:	No
File System:	Linux ext3
System State:	Run Level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other Software:	None

SPEC OMPG2012 Result

Copyright 2012-2021 Standard Performance Evaluation Corporation

Intel

Intel Server System M70KLP (Intel Xeon Platinum 8360Y, 2.40 GHz)

SPECompG_peak2012 = 39.0

SPECompG_base2012 = 32.4

OMP2012 license:13
Test sponsor: Intel
Tested by: Intel

Test date: Apr-2021
Hardware Availability: Mar-2021
Software Availability: Mar-2021

Maximum Peak Threads: 144

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	144	20.3	228	20.3	228	**20.3**	**228**	144	20.3	228	**20.3**	**228**	20.4	227
351.bwaves	144	159	28.5	161	28.2	**159**	**28.5**	72	158	28.7	**157**	**28.8**	157	28.8
352.nab	144	145	26.9	145	26.9	**145**	**26.9**	144	**123**	**31.7**	122	31.8	123	31.6
357.bt331	144	115	41.2	114	41.5	**115**	**41.2**	144	**112**	**42.2**	113	42.1	111	42.6
358.botsalgn	144	207	21.1	207	21.1	**207**	**21.1**	144	193	22.5	193	22.5	**193**	**22.5**
359.botsspar	144	328	16.0	327	16.1	**327**	**16.0**	72	38.1	138	**38.1**	**138**	37.9	138
360.ilbdc	144	176	20.2	176	20.3	**176**	**20.2**	144	**172**	**20.7**	172	20.7	172	20.7
362.fma3d	144	230	16.5	**228**	**16.7**	224	17.0	144	**222**	**17.1**	222	17.1	219	17.3
363.swim	144	**198**	**22.9**	197	22.9	198	22.9	72	198	22.9	199	22.8	**198**	**22.9**
367.imagick	144	122	57.4	121	58.1	**122**	**57.8**	72	126	55.7	**126**	**55.6**	127	55.2
370.mgrid331	144	230	19.2	229	19.3	**230**	**19.2**	72	**205**	**21.5**	206	21.5	205	21.6
371.applu331	144	99.5	60.9	**99.9**	**60.7**	109	55.4	144	**98.9**	**61.3**	101	59.8	98.6	61.5
372.smithwa	144	105	51.1	105	51.1	**105**	**51.1**	144	106	50.8	105	51.0	**105**	**51.0**
376.kdtree	144	204	22.1	**203**	**22.1**	203	22.1	144	201	22.4	**201**	**22.4**	201	22.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program /global/panfs02/innl/aknyaze1/OMP2012/1.1/Docs/sysinfo
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)
running on eij379 Sun Apr 18 10:12:35 2021

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/omp2012/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8360Y CPU @ 2.40GHz
      2 "physical id"s (chips)
      144 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 36
      siblings  : 72
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
      22 23 24 25 26 27 28 29 30 31 32 33 34 35
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
      22 23 24 25 26 27 28 29 30 31 32 33 34 35
   cache size : 55296 KB
```

Continued on next page

Platform Notes (Continued)

```
From /proc/meminfo
   MemTotal:       263785224 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   centos-release: CentOS Linux release 8.3.2011
   centos-release-upstream: Derived from Red Hat Enterprise Linux 8.3
   os-release:
      NAME="CentOS Linux"
      VERSION="8"
      ID="centos"
      ID_LIKE="rhel fedora"
      VERSION_ID="8"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="CentOS Linux 8"
      ANSI_COLOR="0;31"
   redhat-release: CentOS Linux release 8.3.2011
   system-release: CentOS Linux release 8.3.2011
   system-release-cpe: cpe:/o:centos:centos:8

uname -a:
   Linux eij379 4.18.0-240.22.1.el8_3.crt1.x86_64 #1 SMP Thu Apr 8 10:38:43 MDT
   2021 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 15 17:10

SPEC is set to: /global/panfs02/innl/aknyaze1/OMP2012/1.1
   Filesystem                Type   Size  Used Avail Use% Mounted on
   panfs://36.101.212.1/innl panfs  269T  210T   59T  79% /global/panfs02/innl
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.


(End of data from sysinfo program)
```

General Notes

```
------------------------------------------------------------------------
General base OMP Library Settings
  ENV_KMP_AFFINITY=compact,0,verbose

------------------------------------------------------------------------
General peak OMP Library Settings
  ENV_KMP_AFFINITY=compact,0,verbose

------------------------------------------------------------------------
```

Continued on next page

General Notes (Continued)

```
Per benchmark peak OMP Library Settings

================================================================================
System settings notes:
  Intel Turbo Boost Technology (Turbo)  : Disabled

================================================================================
General OMP Library Settings
  KMP_LIBRARY=turnaround
  KMP_STACKSIZE=292M
  KMP_BLOCKTIME=infinite
  OMP_DYNAMIC=FALSE
  OMP_NESTED=FALSE
  OMP_SCHEDULE=static

Spectre and Meltdown
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
================================================================================
351.bwaves:peak:
  ENV_KMP_AFFINITY=compact,1,verbose

================================================================================
359.botsspar:peak:
  ENV_KMP_AFFINITY=compact,1,verbose

================================================================================
363.swim:peak:
  ENV_KMP_AFFINITY=compact,1,verbose

================================================================================
367.imagick:peak:
  ENV_KMP_AFFINITY=compact,1,verbose

================================================================================
370.mgrid331:peak:
  ENV_KMP_AFFINITY=compact,1,verbose

================================================================================
370.mgrid331:peak:
Compiler: Fortran: Version 19.0.3.199 of Intel Composer XE for Linux
```

Base Compiler Invocation

C benchmarks:
icc

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:
-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2
-ansi-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0 -ipo

C++ benchmarks:
-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2
-ansi-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0 -ipo

Fortran benchmarks:
-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2
-ansi-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0 -ipo
-align all

Peak Compiler Invocation

C benchmarks (except as noted below):
icx

367.imagick: icc

372.smithwa: icc

C++ benchmarks:
icpx

Fortran benchmarks (except as noted below):
ifort

Continued on next page

Peak Compiler Invocation (Continued)

370.mgrid331: ifx

371.applu331: /opt/intel/compiler/2019u3/bin/ifort

Peak Portability Flags

350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99

Peak Optimization Flags

C benchmarks:

352.nab: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fno-alias -ipo

358.botsalgn: Same as 352.nab

359.botsspar: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fno-alias

367.imagick: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt -ipo

372.smithwa: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0 -ipo

C++ benchmarks:
-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fno-alias -ipo

Fortran benchmarks:

350.md: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt -ipo -qopt-prefetch=0 -ipo -align all

351.bwaves: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt -qopt-prefetch=2 -ipo -align all

357.bt331: -O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt -qopt-prefetch=1 -ipo -align all

Continued on next page

Peak Optimization Flags (Continued)

360.ilbdc: `-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt -qopt-prefetch=4 -ipo -align all`

362.fma3d: `Same as 350.md`

363.swim: `-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2 -no-prec-div -no-prec-sqrt -fno-alias -qopt-malloc-options=3 -qopt-prefetch=0 -ipo -align all`

370.mgrid331: `-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fno-alias -ipo -align all`

371.applu331: `-O3 -qopenmp -xCORE-AVX512 -qopt-zmm-usage=high -fp-model fast=2 -fno-alias -no-prec-div -no-prec-sqrt -qopt-prefetch=0 -align all`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/omp2012/flags/Intel-ic19-linux64.20210507.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/omp2012/flags/Intel-ic19-linux64.20210507.xml`

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.1.
Report generated on Thu May 6 20:05:44 2021 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 6 May 2021.