CINT2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Bull

NovaScale B280 (Intel Xeon processor 5130, 2.0 GHz)

SPECint_rate2000 = 87.5

SPECint_rate_base2000 = 87.3

SPEC license #: 20 | Tested by: Bull | Test date: Dec-2006 | Hardware Avail: Jan-2007 | Software Avail: Dec-2006

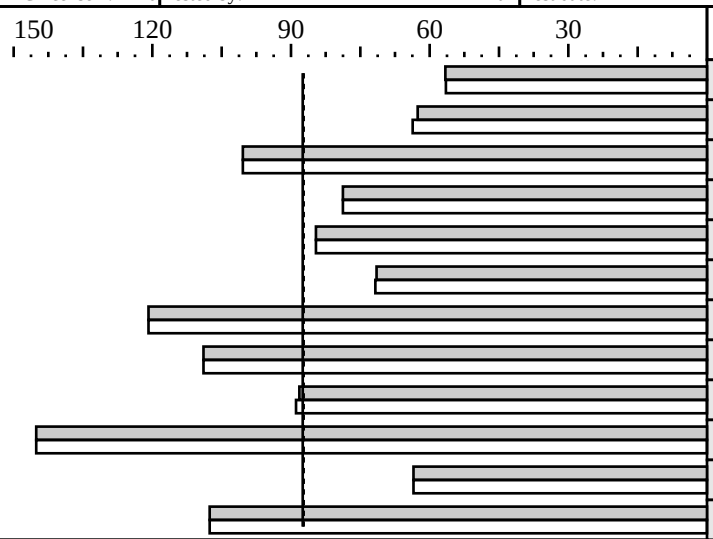

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	115	56.6	4	115	56.5
175.vpr	4	104	62.6	4	102	63.7
176.gcc	4	50.8	100	4	50.8	100
181.mcf	4	106	78.8	4	106	78.8
186.crafty	4	54.8	84.6	4	54.8	84.6
197.parser	4	117	71.5	4	116	71.7
252.eon	4	49.9	121	4	49.9	121
253.perlbmk	4	76.7	109	4	76.7	109
254.gap	4	57.9	88.2	4	57.4	88.9
255.vortex	4	60.8	145	4	60.8	145
256.bzip2	4	110	63.5	4	110	63.5
300.twolf	4	129	108	4	129	108

Hardware

CPU:	Intel Xeon Processor 5130 (2.0 GHz, 4MB L2, 1333MHz bus)
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1 to 2 chips
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	4096KB(I+D) on chip per chip (shared by 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8GB (1GB DIMMx8, FB-DIMM PC2-5300F ECC CL5)
Disk Subsystem:	1x73GB SAS 10000 rpm
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise Edition (32 bits), Service Pack1
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.1, - Build 20061103Z Package ID: W_CC_C_9.1.033 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library 8.0 (shlW32M.lib)
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Portability flags:
 176.gcc:     -Dalloca=_alloca /F10000000
 186.crafty:  -DNT_i386
 253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
 254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO ONESTEP=yes shlW32M.lib
 for C++ program 252.eon:
 -fast -Qcxx_features +FDO ONESTEP=yes

Peak Tuning Flags:
   164.gzip:     -fast +FDO ONESTEP=yes
   175.vpr:      -fast +FDO ONESTEP=yes
   176.gcc:      basepeak=yes
   181.mcf:      basepeak=yes
```

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    186.crafty:   basepeak=yes
    197.parser:   -fast +FDO ONESTEP=yes
    252.eon:      basepeak=yes
    253.perlbmk:  basepeak=yes
    254.gap:      -fast +FDO ONESTEP=yes
    255.vortex:   basepeak=yes
    256.bzip2:    basepeak=yes
    300.twolf:    basepeak=yes


 Other Configuration Notes


For information about Bull please see:
http://www.bull.com
```