CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850MD motherboard (1.9 GHz, Pentium 4 processor)

SPECfp2000 = 698

SPECfp_base2000 = 688

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Nov-2001 | Hardware Avail: Aug-2001 | Software Avail: Oct-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	172	932	170	939
171.swim	3100	245	1263	243	1274
172.mgrid	1800	265	679	256	702
173.applu	2100	273	768	270	779
177.mesa	1400	182	769	181	774
178.galgel	2900	331	876	329	880
179.art	2600	489	532	483	538
183.equake	1300	171	760	163	795
187.facerec	1900	236	803	236	806
188.ammp	2200	555	396	548	401
189.lucas	2000	211	947	211	947
191.fma3d	2100	346	607	346	608
200.sixtrack	1100	317	347	304	361
301.apsi	2600	514	505	514	505

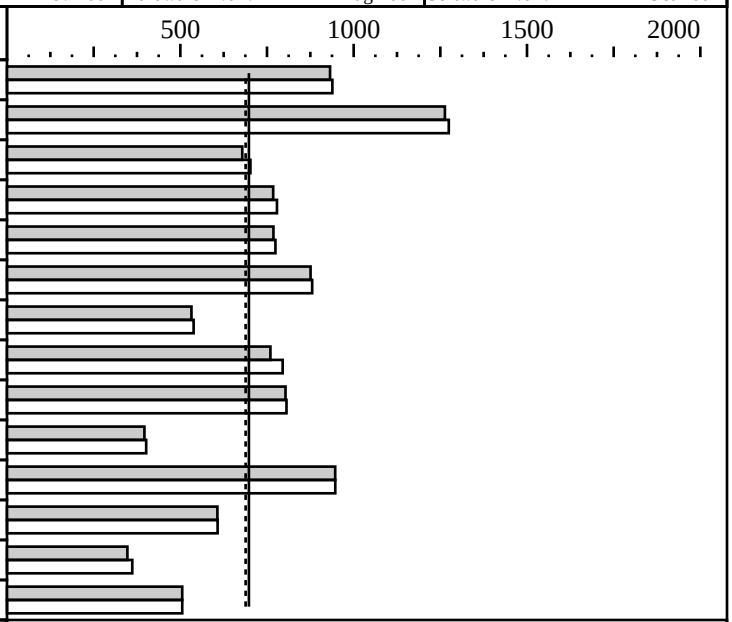

Hardware

CPU:	Pentium 4 processor (1.9 GHz, 400 MHz bus)
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 8KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC800 RDRAM non-ECC modules)
Disk Subsystem:	IBM DTLA-307030 ATA-100
Other Hardware:	None

Software

Operating System:	Windows XP Professional(Build 2600)
Compiler:	Intel C++ Compiler 5.0.1 Build 010525Z Intel Fortran Compiler 5.0.1 Build 010525Z Microsoft Visual C++ 6.0 SP5(for libraries)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning:  -Qipo -QxW -O3 +FDO
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -Qipo -QxW  -O3 +FDO
171.swim:     -Qipo -QxW  -O3 +FDO
172.mgrid:    -Qipo -QaxW -O3 +FDO
173.applu:    -Qipo -QxW  -O3 -Qscalar_rep- -Qauto +FDO
177.mesa:     -Qipo -Oa -QxW -O3 +FDO
178.galgel:   -Qipo -QxW  -O3 +FDO
179.art:      -Qipo -QxW  -O3 -Oa +FDO
183.equake:   -Qipo -QxW  -Oa -Qrcd +FDO
187.facerec:  -Qipo -QxW  -O3 +FDO
188.ammp:     -Qipo -QxW  -O3 -Oa +FDO
189.lucas:    -Qipo -QxW  -O3 +FDO
191.fma3d:    -Qipo -QxW  -O3 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850MD motherboard (1.9 GHz, Pentium 4 processor)

SPECfp2000 = 698

SPECfp_base2000 = 688

SPEC license #: 13	Tested by: Intel Corporation	Test date: Nov-2001	Hardware Avail: Aug-2001	Software Avail: Oct-2001

Notes/Tuning Information (Continued)

```
200.sixtrack: -Qipo -QxW  +FDO
301.apsi:     -Qipo -QxW  -O3 +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1 B
Product description located as of 1/2002:
http://developer.intel.com/design/motherbd/md/index.htm
Motherboard ordering information is available at:
http://program.intel.com/shared/products/boards/D850MD/index.htm
The system bus runs at 400 MHz
```