CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
hp server rp2470

SPECint_rate2000 = 6.74

SPECint_rate_base2000 = 6.37

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jan-2002 | Hardware Avail: Mar-2002 | Software Avail: Dec-2001

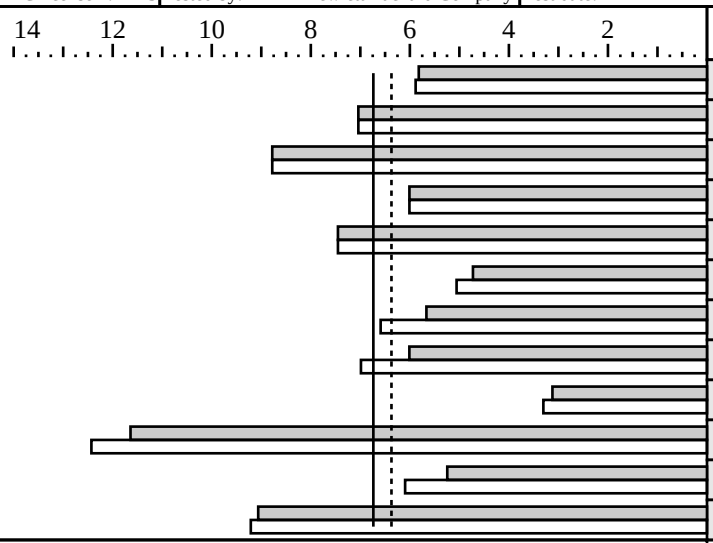

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	279	5.82	1	276	5.88
175.vpr	1	231	7.04	1	231	7.04
176.gcc	1	145	8.78	1	145	8.78
181.mcf	1	347	6.01	1	347	6.01
186.crafty	1	156	7.45	1	156	7.45
197.parser	1	442	4.73	1	413	5.06
252.eon	1	266	5.67	1	229	6.59
253.perlbmk	1	347	6.01	1	299	6.99
254.gap	1	409	3.12	1	386	3.30
255.vortex	1	189	11.6	1	177	12.4
256.bzip2	1	332	5.24	1	285	6.10
300.twolf	1	384	9.06	1	378	9.21

Hardware

CPU:	PA-8700
CPU MHz:	750
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-2
Parallel:	No
Primary Cache:	0.75MB(I) + 1.5MB(D) on chip
Secondary Cache:	None
L3 Cache:	None
Other Cache:	None
Memory:	8GB (8x1GB DIMMs)
Disk Subsystem:	1x36 GB SCSI
Other Hardware:	

Software

Operating System:	HP-UX 11i B.11.11.0112
Compiler:	HP ANSI C B11.11.04 HP aC++ Compiler C.03.33.01
File System:	VxFS
System State:	Multi-user

Notes/Tuning Information

```
Portability:
  176.gcc: -DHOST_WORDS_BIG_ENDIAN
  186.crafty: -DHP
  252.eon: -DFMAX_IS_DOUBLE
  253.perlbmk: -DSPEC_CPU2000_HP
  254.gap: -DSPEC_CPU2000_HP -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO
           -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

Baseline compile flags:
  C      : +I/+P +Oall +Ostatic_prediction -Wl,-a,archive
  C++    : +I/+P +O3 +Ostatic_prediction -Wl,-a,archive

Peak compile flags:
  164.gzip: +I/+P +Oall +Optrs_strongly_typed +Oinline_budget=800
            -Wl,-a,archive +Ostatic_prediction
  175.vpr: basepeak=true
  176.gcc: basepeak=true
  181.mcf: basepeak=true
  186.crafty: basepeak=true
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    197.parser: +I/+P +Oall +Odataprefetch +ESfic +Oinline_budget=400
                +Owhole_program_mode -Wl,-a,archive +Ostatic_prediction
    252.eon: +I/+P +noeh +O4 +Optrs_strongly_typed +Olibcalls +Oentrysched
             +A +ESfic -Wl,-a,archive +Ostatic_prediction
    253.perlbmk: +I/+P +Oall +ESlit +ESfic +Optrs_strongly_typed
                 +Opromote_indirect_calls -Wl,-a,archive +Ostatic_prediction
                 linked with /opt/langtools/lib/fastmem.o
    254.gap: +I/+P +Oall +ESlit +ESfic +Optrs_strongly_typed
             +Opromote_indirect_calls -Wl,-a,archive +Ostatic_prediction
    255.vortex: +I/+P +Oall +Oinline_budget=800 +Optrs_strongly_typed
                -Wl,-a,archive +Ostatic_prediction
    256.bzip2: +I/+P +Oall +Odataprefetch +Optrs_strongly_typed +Owhole_program_mode
               +Onoptrs_to_globals +Oinline_budget=80 -Wl,-a,archive +Ostatic_prediction
    300.twolf: +I/+P +Oall +Optrs_strongly_typed -Wl,-a,archive +Ostatic_prediction

  Operating system configuration notes:
    vps_pagesize 4096, vps_ceiling 16384
    dbc_min_pct 15, dbc_max_pct 15
    maxdsiz_64bit 0x4000000000, maxssiz_64bit 0x400000000
    nfile 8192
    Unused processors disabled at boot.
```