CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

ION Computer Systems

LN10J (3.4GHz Xeon processor w. 1MB L2 cache)

SPECfp_rate2000 = 26.3

SPECfp_rate_base2000 = 26.3

SPEC license #: 2697 | Tested by: ION | Test date: Jan-2005 | Hardware Avail: Dec-2004 | Software Avail: Dec-2004

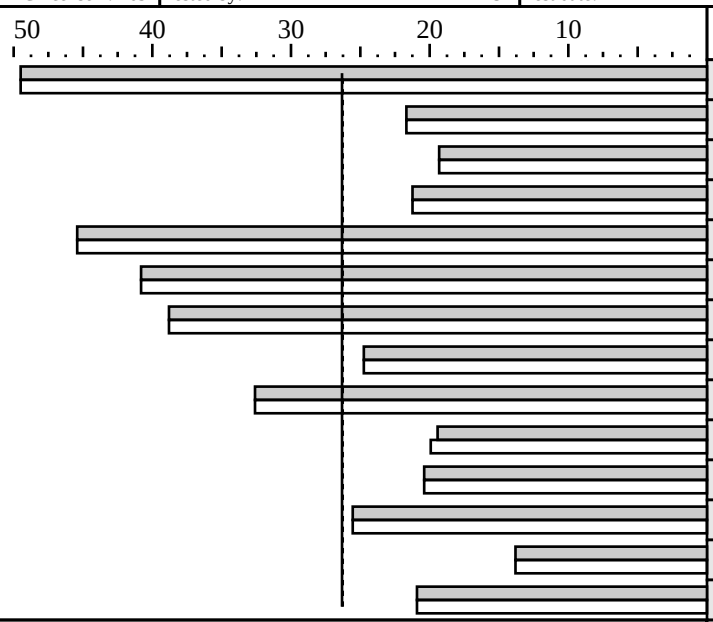

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	75.0	49.5	2	75.0	49.5
171.swim	2	332	21.7	2	332	21.7
172.mgrid	2	216	19.3	2	216	19.3
173.applu	2	229	21.2	2	229	21.2
177.mesa	2	71.5	45.4	2	71.5	45.4
178.galgel	2	165	40.8	2	165	40.8
179.art	2	155	38.8	2	155	38.8
183.equake	2	122	24.7	2	122	24.7
187.facerec	2	135	32.6	2	135	32.6
188.ammp	2	263	19.4	2	256	19.9
189.lucas	2	228	20.4	2	228	20.4
191.fma3d	2	191	25.5	2	191	25.5
200.sixtrack	2	185	13.8	2	185	13.8
301.apsi	2	288	20.9	2	288	20.9

Hardware

CPU:	Intel Xeon processor, 800MHz system bus
CPU MHz:	3392
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip, HyperThreading disabled
CPU(s) orderable:	1-2
Parallel:	No
Primary Cache:	12K(I) micro-ops + 8KB(D) on chip
Secondary Cache:	1MB (I+D) on chip
L3 Cache:	None
Other Cache:	None
Memory:	4 GB (4x1GB DDR2-400 DIMMs)
Disk Subsystem:	80GB Seagate SATA disk
Other Hardware:	None

Software

Operating System:	SuSE Linux Professional 9.1 for EM64T, 2.6.4-52-smp x86_64
Compiler:	Intel(R) Fortran Compiler for EM64T, V8.1 (Build 20041123) Intel(R) C Compiler for EM64T, V8.1 (Build 20041123)
File System:	ext3
System State:	Multi-user, run level 3

Notes/Tuning Information

```
HyperThreading disabled in BIOS

Baseline optimization flags:
      C programs: -xP -fast -ansi_alias +FDO
Fortran programs: -xP -fast +FDO

FP Peak optimization flags:
     168.wupwise: basepeak=yes
        171.swim: basepeak=yes
        72.mgrid: basepeak=yes
       173.applu: basepeak=yes
        177.mesa: basepeak=yes
      178.galgel: basepeak=yes
         179.art: basepeak=yes
      183.equake: basepeak=yes
     187.facerec: basepeak=yes
        188.ammp: -xP -alias_args +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
        189.lucas: basepeak=yes
        191.fma3d: basepeak=yes
    200.sixtrack: basepeak=yes
        301.apsi: basepeak=yes

FP Portability Flags:
      178.galgel:  -FI
```