CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL145 G2 (AMD Opteron (TM) 252)

SPECfp2000 = 2084

SPECfp_base2000 = 1908

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jun-2005 | Hardware Avail: May-2005 | Software Avail: Apr-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	60.8	2630	51.3	3121
171.swim	3100	121	2565	121	2565
172.mgrid	1800	102	1770	94.4	1906
173.applu	2100	100	2091	92.4	2272
177.mesa	1400	69.9	2004	65.4	2140
178.galgel	2900	92.6	3132	83.7	3464
179.art	2600	98.5	2640	69.6	3736
183.equake	1300	77.9	1668	72.8	1785
187.facerec	1900	74.9	2535	71.7	2650
188.ammp	2200	170	1296	159	1381
189.lucas	2000	101	1986	101	1972
191.fma3d	2100	134	1572	125	1679
200.sixtrack	1100	145	757	126	872
301.apsi	2600	164	1582	161	1611

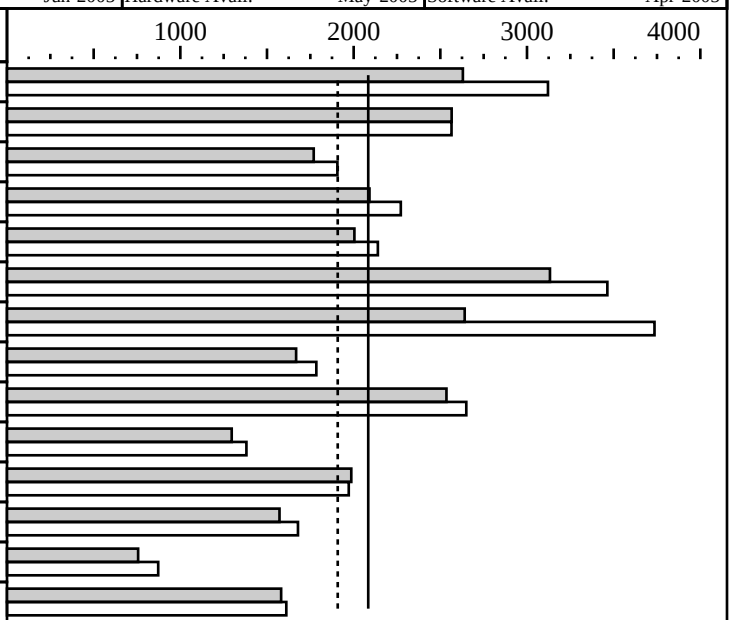

Hardware

CPU:	AMD Opteron (TM) 252
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 1 SuSE kernel 2.6.5-7.139-smp
Compiler:	PathScale EKO Compiler Suite, Release 2.1 AMD Core Math Library 2.5.1
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library
Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex
Portability flags:
  178.galgel:    -fixedform
Peak tuning:
  168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3 -TENV:X=4
                 -IPA:space=1000:linear=on:plimit=50000:callee_limit=5000
                 -INLINE:aggressive=on +FDO
  171.swim:      -Ofast -LNO:fusion=2
  172.mgrid:     -O3 -LNO:fusion=2:blocking=off
                -OPT:Ofast:unroll_times_max=8:unroll_size=256:ro=3 -CG:gcm=off:cflow=off
  173.applu:     -Ofast -CG:local_fwd_sched=on
                 -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3
                 -OPT:ro=3 -TENV:X=3 -WOPT:val=2
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on +FDO
    178.galgel:    -Ofast -OPT:fast_complex -CG:use_movlpd=on RM_SOURCES=lapak.f90 +ACML
    179.art:       -O3 -OPT:ro=2:div_split=on:alias=typed -fno-math-errno -m32 +FDO
    183.equake:    -Ofast -WOPT:mem_opnds=on -CG:local_fwd_sched=on -m32
    187.facerec:   -Ofast -OPT:treeheight=on:IEEE_NaN_Inf=off:ro=3 -CG:load_exe=0
                   -LNO:fusion=2 -IPA:plimit=1500 +FDO
    188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                   -fno-math-errno -TENV:X=4 -LNO:prefetch=0 +FDO
    189.lucas:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 +FDO
    191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                   -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
    200.sixtrack:  -Ofast -CG:load_exe=1 +FDO
    301.apsi:      -Ofast -TENV:X=4 -LNO:fusion=2:prefetch=0
  BIOS Configuration Notes
    Node Interleaving is Disabled
  Other Configuration Notes
     Taskset utility used to bind process to CPU(s)
```