CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant DL140 G2 (3.8GHz, Intel Xeon)

SPECfp_rate2000 = 32.5

SPECfp_rate_base2000 = 31.7

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2005 | Hardware Avail: Sep-2005 | Software Avail: May-2005

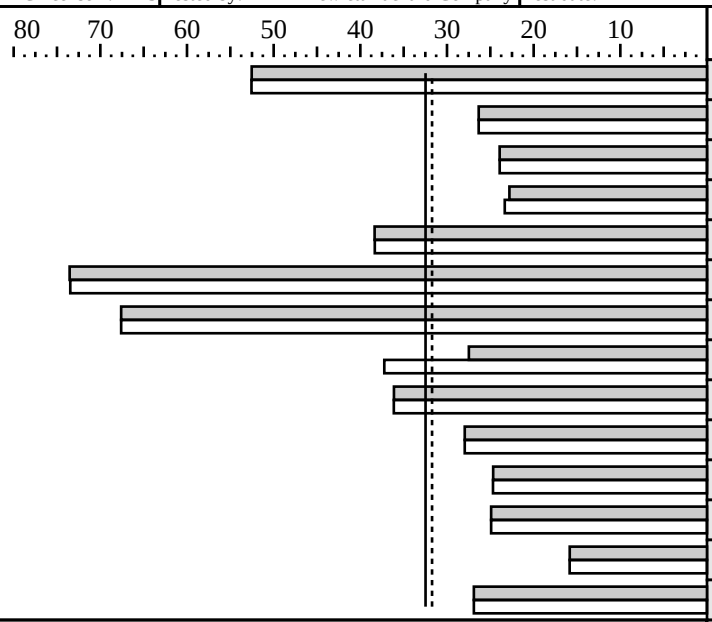

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	70.7	52.5	2	70.6	52.6
171.swim	2	273	26.3	2	273	26.3
172.mgrid	2	175	23.9	2	175	23.9
173.applu	2	214	22.8	2	209	23.3
177.mesa	2	84.7	38.4	2	84.7	38.3
178.galgel	2	91.5	73.5	2	91.6	73.5
179.art	2	89.2	67.6	2	89.2	67.6
183.equake	2	110	27.5	2	81.0	37.2
187.facerec	2	122	36.1	2	122	36.1
188.ammp	2	183	28.0	2	183	28.0
189.lucas	2	188	24.7	2	188	24.7
191.fma3d	2	196	24.9	2	196	24.9
200.sixtrack	2	161	15.8	2	161	15.8
301.apsi	2	224	26.9	2	224	26.9

Hardware

CPU:	Intel Xeon (3.8GHz, 2MB L2, 800MHz bus)
CPU MHz:	3800
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD on chip
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1024MB PC2-3200
Disk Subsystem:	1x80.0GB SATA
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 8.1 Build 20050524Z) Intel Fortran Compiler for 32-bit applications, (Version 8.1 Build 20050517Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use


Base tuning:    -fast -Qansi_alias +FDO
Portability flags:
  178.galgel: -FI /F32000000
Peak tuning:
  168.wupwise:  -fast -Qansi_alias                  +FDO
  171.swim:     -fast                       -f77rtl +FDO ONESTEP=yes
  172.mgrid:    -fast -Qansi_alias                  +FDO
  173.applu:    -fast -Qscalar_rep- -Qauto -f77rtl +FDO ONESTEP=yes
  177.mesa:     -fast                               +FDO ONESTEP=yes
  178.galgel:   -fast                               +FDO ONESTEP=yes
  179.art:      basepeak=1
  183.equake:   -fast -Oa -Qrcd                     +FDO ONESTEP=yes shlw32M.lib
  187.facerec:  -fast -Qunroll1 -Qscalar_rep- -fpp +FDO ONESTEP=yes
  188.ammp:     basepeak=1
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    189.lucas:     -fast
    191.fma3d:     basepeak=1
    200.sixtrack: -fast                                  +FDO
    301.apsi:              basepeak=1
  BIOS Configuration Notes
    Hyper-Threading Technology disabled
```