CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Dell

PowerEdge 6800 (2.66GHz Intel Xeon Processor 7020)

SPECint_rate2000 = 78.9

SPECint_rate_base2000 = 73.5

SPEC license #: 55 | Tested by: Dell, Round Rock, TX | Test date: Nov-2005 | Hardware Avail: Nov-2005 | Software Avail: Aug-2005

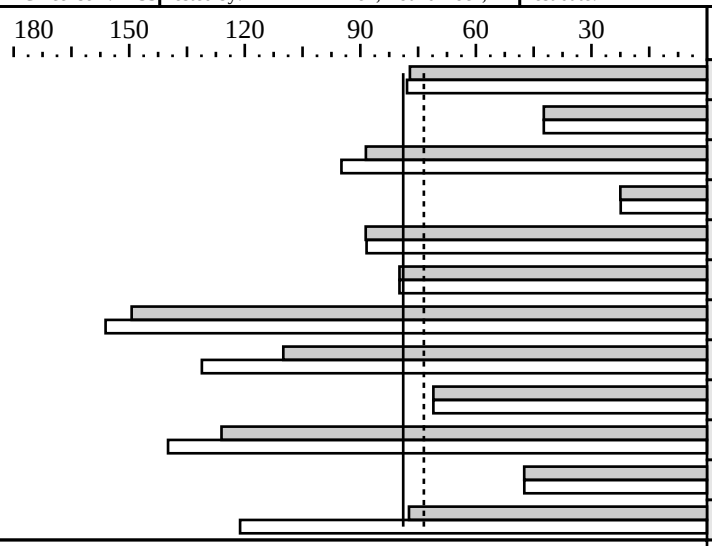

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	8	168	77.1	8	167	77.9
175.vpr	8	307	42.4	8	307	42.4
176.gcc	8	115	88.6	8	108	94.9
181.mcf	8	742	22.5	8	746	22.4
186.crafty	8	105	88.6	8	105	88.4
197.parser	8	209	79.8	8	209	79.8
252.eon	8	80.8	149	8	77.3	156
253.perlbmk	8	152	110	8	127	131
254.gap	8	144	71.0	8	144	71.0
255.vortex	8	140	126	8	126	140
256.bzip2	8	293	47.5	8	293	47.4
300.twolf	8	360	77.4	8	230	121

Hardware

CPU:	Intel Xeon processor 7020 (2.66GHz, 2x1MB L2, 667MHz system bus)
CPU MHz:	2660
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2,3,4
Parallel:	No
Primary Cache:	12KB(I) + 16KB(D) on chip, per core
Secondary Cache:	1024KB(I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2GB (dual-ranked) ECC 400MHz DDR2 SDRAM
Disk Subsystem:	1 x 36GB 15000RPM SCSI
Other Hardware:	None

Software

Operating System:	Windows Server 2003, Enterprise Edition, Service Pack 1
Compiler:	Intel C/C++ Compiler 9.0 for IA32 (20050809) Microsoft Visual Studio .NET 2003(7.1.3088, for libraries) MicroQuill SmartHeap Library 7.1
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
  ONESTEP=yes
  +FDO:   PASS1=-Qprof_gen  PASS2=-Qprof_use
PORTABILITY FLAGS
  176.gcc:     -Dalloca=_alloca /F10000000
  186.crafty:  -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
BASE TUNING
  C:           -fast -Qansi_alias +FDO
  C++:         -fast -Qcxx_features +FDO
PEAK TUNING
  164.gzip:    -fast +FDO
  175.vpr:     basepeak=yes
  176.gcc:     -fast +FDO shlW32M.lib
  181.mcf:     -fast +FDO shlW32M.lib
  186.crafty:  -fast -Oa +FDO shlW32M.lib
  197.parser:  basepeak=yes
  252.eon:     -fast +FDO
  253.perlbmk: -fast -Qansi_alias +FDO shlW32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
254.gap:     basepeak=yes
255.vortex   -fast +FDO shlW32M.lib
256.bzip2:   -fast -Qunroll1 -Oa +FDO
300.twolf:   -fast +FDO shlW32M.lib
The PowerEdge 6800 and the PowerEdge 6850 are electronically equivalent.
The test results were produced on the PowerEdge 6850.
```