CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

IBM System X 3455 (AMD Opteron (TM) 2210)

SPECfp2000 = 1613

SPECfp_base2000 = 1481

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Aug-2006 | Hardware Avail: Sep-2006 | Software Avail: Mar-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	80.4	1991	70.8	2259
171.swim	3100	141	2199	131	2362
172.mgrid	1800	139	1296	123	1469
173.applu	2100	135	1555	122	1717
177.mesa	1400	97.6	1434	91.3	1533
178.galgel	2900	119	2432	119	2441
179.art	2600	131	1982	98.3	2646
183.equake	1300	104	1246	96.5	1347
187.facerec	1900	99.1	1916	96.6	1966
188.ammp	2200	201	1096	192	1143
189.lucas	2000	117	1702	100	1997
191.fma3d	2100	170	1238	172	1223
200.sixtrack	1100	182	603	174	634
301.apsi	2600	216	1202	201	1292

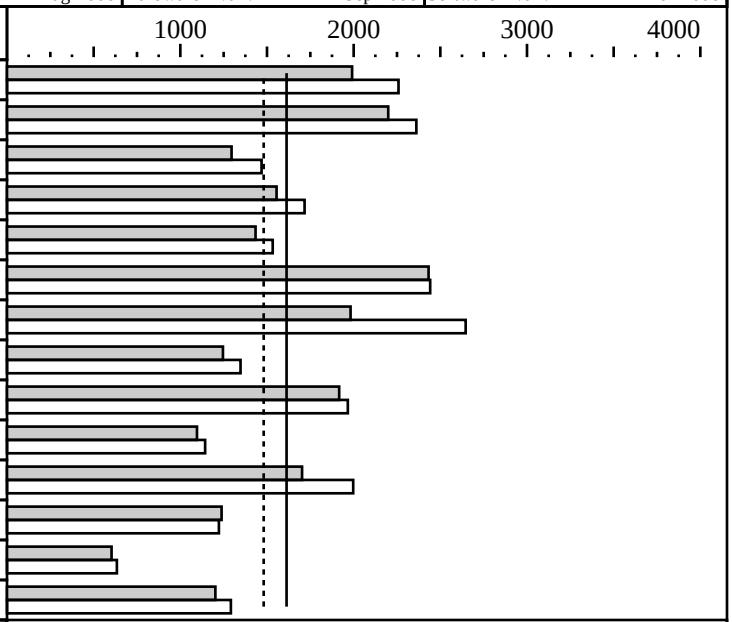

Hardware

CPU:	AMD Opteron 2210
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2GB, PC2-5300
Disk Subsystem:	SATA, 80GB 10K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP3 SLES 64 bit Kernel 2.6.5-7.244-smp
Compiler:	PathScale EKO Compiler Suite, Release 2.4 PathScale EKOPath(TM) Compiler Suite, Release 2.4
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
  +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata

  Baseline optimization
    C programs:       -Ofast -WOPT:mem_opnds=on +FDO
    Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
  Portability Flags:
    178.galgel: -fixedform

 Peak Tuning:
  168.wupwise:  -Ofast -IPA:linear=on -LNO:prefetch_ahead=5:prefetch=3
                -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
  171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
  172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_arith=3:unroll_size=200
                -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
                -WOPT:mem_opnds=on:aggstr=0
  173.applu:    -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
177.mesa:     -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
178.galgel:   -Ofast -OPT:fast_complex=on +FDO
179.art:      -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
183.equake:   -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
187.facerec:  -Ofast -IPA:plimit=1500 -LNO:fusion=2
              -OPT:IEEE_NaN_Inf=off:ro=3:unroll_size=0 +FDO
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
              -GRA:optimize_boundary=on -fno-math-errno -TENV:X=4 +FDO
189.lucas:    -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
191.fma3d:    -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
              -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack: -O3 -OPT:Ofast:early_intrinsics=on
              -fno-math-errno -CG:load_exe=1 +FDO
301.apsi:     -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
```