CINT2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Bull

NovaScale B280 (Intel Xeon processor E5320, 1.86 GHz)

SPECint2000 = 1934

SPECint_base2000 = 1931

SPEC license #: 20 | Tested by: Bull | Test date: Feb-2007 | Hardware Avail: Jan-2007 | Software Avail: Dec-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	121	1160	121	1157
175.vpr	1400	98.4	1422	96.5	1450
176.gcc	1100	53.6	2051	53.6	2051
181.mcf	1800	61.8	2914	61.8	2914
186.crafty	1000	58.7	1703	58.7	1703
197.parser	1800	117	1544	116	1548
252.eon	1300	53.5	2430	53.5	2430
253.perlbmk	1800	80.1	2246	80.1	2246
254.gap	1100	58.2	1889	58.2	1889
255.vortex	1900	59.1	3215	59.1	3215
256.bzip2	1500	105	1432	105	1432
300.twolf	3000	138	2177	138	2177

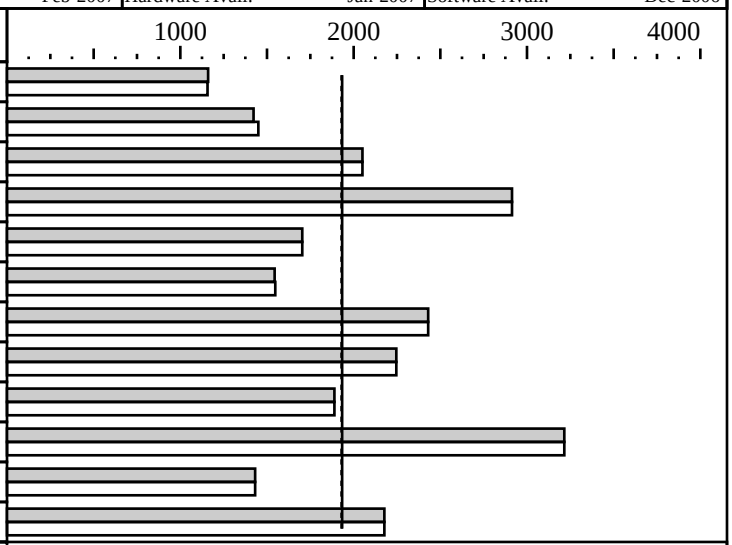

Hardware

CPU:	Intel Xeon Processor E5320 (1.86 GHz, 8MB L2, 1066MHz bus)
CPU MHz:	1860
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 4 cores/chip
CPU(s) orderable:	1 to 2 chips
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared by 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8GB (1GB DIMMx8, FB-DIMM PC2-5300F ECC CL5)
Disk Subsystem:	1x73GB SAS 10000 rpm
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise Edition (32 bits), Service Pack1
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.1, - Build 20061103Z Package ID: W_CC_C_9.1.033 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library 8.0 (shlW32M.lib)
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Portability flags:
 176.gcc:     -Dalloca=_alloca /F10000000
 186.crafty:  -DNT_i386
 253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
 254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO ONESTEP=yes shlW32M.lib
 for C++ program 252.eon:
 -fast -Qcxx_features +FDO ONESTEP=yes

Peak Tuning Flags:
   164.gzip:     -fast +FDO ONESTEP=yes
   175.vpr:      -fast +FDO ONESTEP=yes
   176.gcc:      basepeak=yes
   181.mcf:      basepeak=yes
```

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
   186.crafty:   basepeak=yes
   197.parser:   -fast +FDO ONESTEP=yes
   252.eon:      basepeak=yes
   253.perlbmk:  basepeak=yes
   254.gap:      -fast +FDO ONESTEP=yes
   255.vortex:   basepeak=yes
   256.bzip2:    basepeak=yes
   300.twolf:    basepeak=yes


 Other Configuration Notes
   /NUMPROC=1 flag was added to boot.ini to invoke
   uniprocessor environment


For information about Bull please see:
http://www.bull.com
```