SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R300 (Intel Xeon X3323, 2.50 GHz)

SPECint®2006 = 21.9

SPECint_base2006 = 19.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2008
Hardware Availability: Mar-2008
Software Availability: Oct-2008

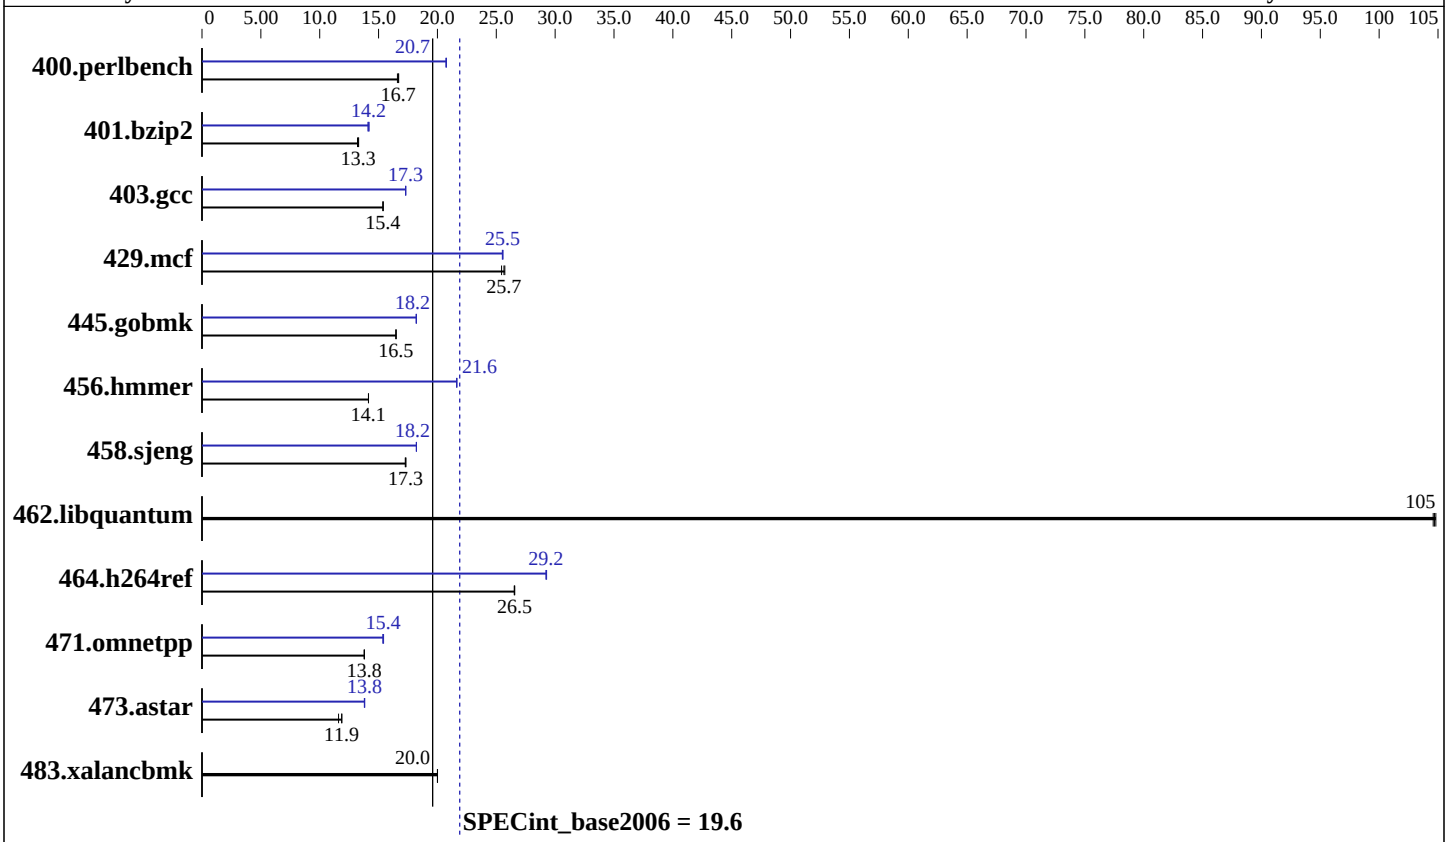

Hardware

CPU Name:	Intel Xeon X3323
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip, 3 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (4 x 4 GB DDR2-667)
Disk Subsystem:	1 x 160 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R300 (Intel Xeon X3323, 2.50 GHz)

SPECint2006 = 21.9

SPECint_base2006 = 19.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2008
Hardware Availability: Mar-2008
Software Availability: Oct-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	585	16.7	**586**	**16.7**	588	16.6	**471**	**20.7**	470	20.8	471	20.7
401.bzip2	**727**	**13.3**	725	13.3	731	13.2	680	14.2	**682**	**14.2**	685	14.1
403.gcc	523	15.4	**523**	**15.4**	524	15.4	465	17.3	465	17.3	**465**	**17.3**
429.mcf	358	25.4	354	25.7	**356**	**25.7**	**357**	**25.5**	357	25.5	357	25.6
445.gobmk	636	16.5	**636**	**16.5**	637	16.5	576	18.2	**576**	**18.2**	576	18.2
456.hmmer	660	14.1	**660**	**14.1**	660	14.1	**431**	**21.6**	431	21.6	431	21.6
458.sjeng	**699**	**17.3**	699	17.3	701	17.3	664	18.2	664	18.2	**664**	**18.2**
462.libquantum	198	105	**198**	**105**	198	105	198	105	**198**	**105**	198	105
464.h264ref	834	26.5	**834**	**26.5**	833	26.6	757	29.2	756	29.3	**757**	**29.2**
471.omnetpp	454	13.8	453	13.8	**453**	**13.8**	**406**	**15.4**	407	15.4	405	15.4
473.astar	591	11.9	605	11.6	**592**	**11.9**	508	13.8	**508**	**13.8**	509	13.8
483.xalancbmk	345	20.0	345	20.0	**345**	**20.0**	345	20.0	345	20.0	**345**	**20.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/042/bin/intel64/icc -L/opt/intel/Compiler/11.0/042/ipp/em64t/lib -I/opt/intel/Compiler/11.0/042/ipp/em64t/include`

456.hmmer: `/opt/intel/Compiler/11.0/042/bin/intel64/icc -L/opt/intel/Compiler/11.0/042/ipp/em64t/lib -I/opt/intel/Compiler/11.0/042/ipp/em64t/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -ansi-alias -opt-prefetch`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.html
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.11.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.xml
http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.11.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R300 (Intel Xeon X3323, 2.50 GHz)

SPECint2006 = 21.9

SPECint_base2006 = 19.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2008
Hardware Availability: Mar-2008
Software Availability: Oct-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:57:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 November 2008.