SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G6
(2.6 GHz AMD Opteron 2435)

SPECfp®_rate2006 = 71.6

SPECfp_rate_base2006 = 64.7

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jun-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

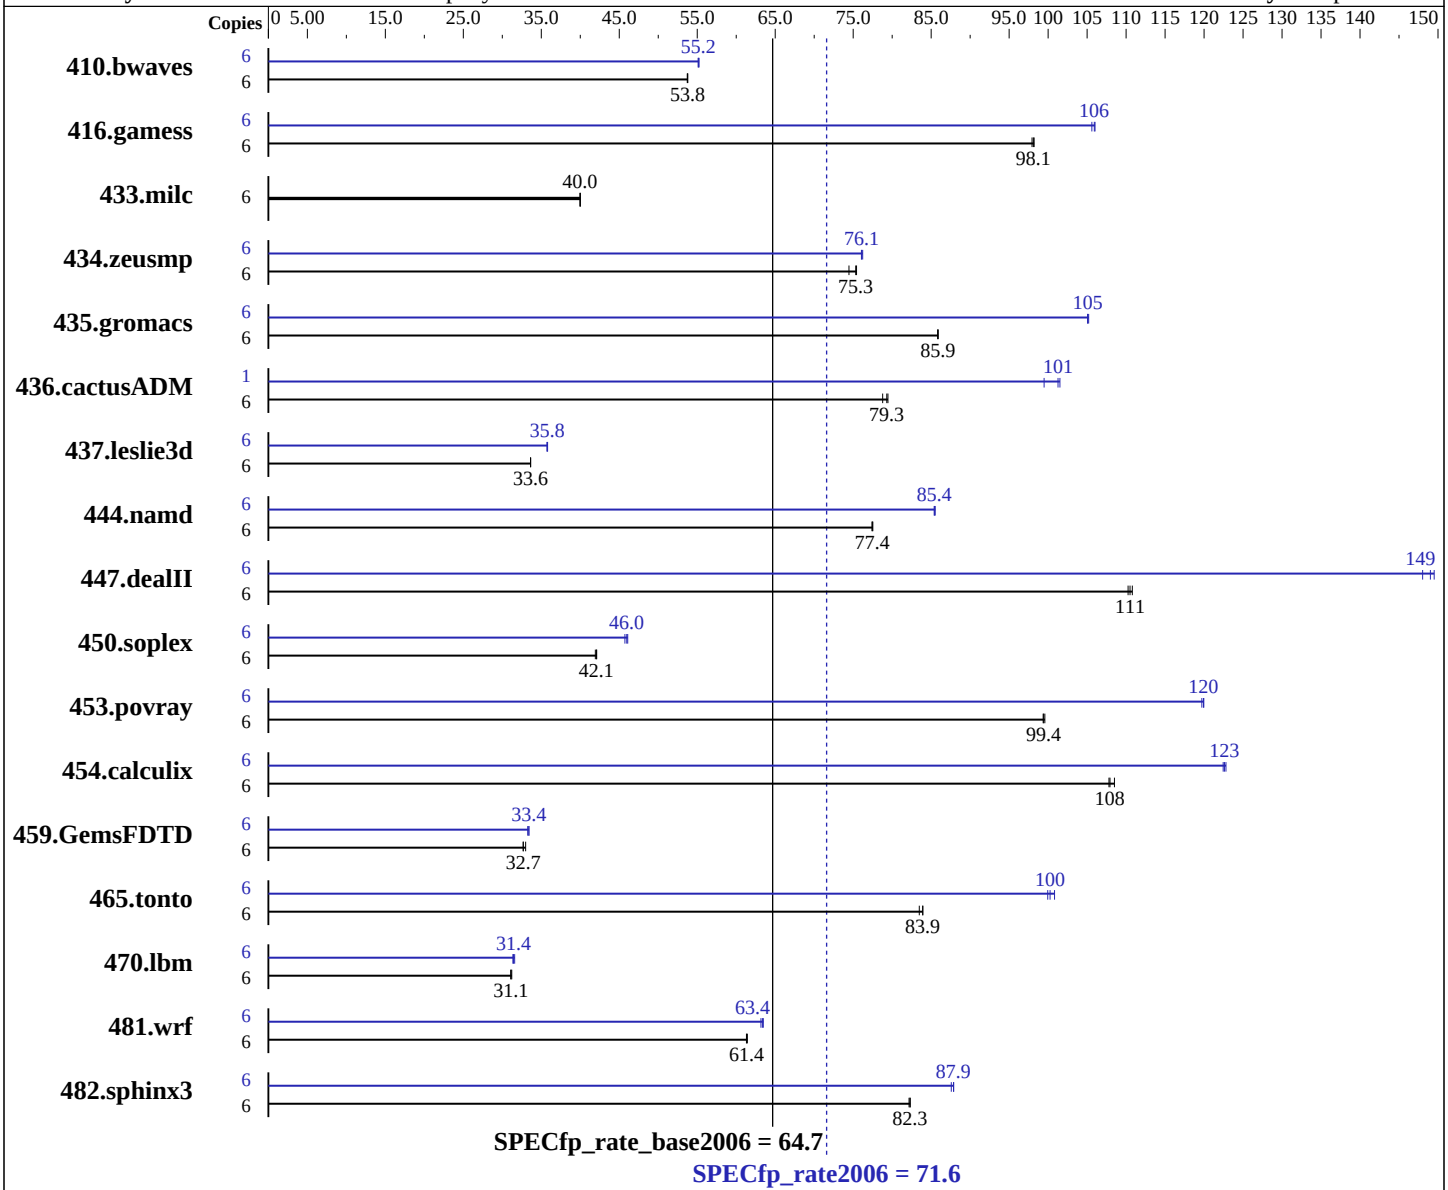

Hardware

CPU Name:	AMD Opteron 2435
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G6
(2.6 GHz AMD Opteron 2435)

SPECfp_rate2006 = 71.6

SPECfp_rate_base2006 = 64.7

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jun-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4x4 GB, PC2-6400P CL5)
Disk Subsystem: 1 x 120 GB SFF SATA, 5400 RPM
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	6	1516	53.8	1518	53.7	**1516**	**53.8**	6	**1478**	**55.2**	1476	55.2	1479	55.1
416.gamess	6	1196	98.2	1200	97.9	**1197**	**98.1**	6	1108	106	1112	106	**1109**	**106**
433.milc	6	**1378**	**40.0**	1378	40.0	1377	40.0	6	**1378**	**40.0**	1378	40.0	1377	40.0
434.zeusmp	6	724	75.4	733	74.5	**725**	**75.3**	6	**718**	**76.1**	718	76.1	716	76.2
435.gromacs	6	**499**	**85.9**	499	85.9	499	85.8	6	407	105	408	105	**408**	**105**
436.cactusADM	6	902	79.5	**904**	**79.3**	910	78.8	1	**118**	**101**	120	99.5	118	102
437.leslie3d	6	1677	33.6	**1677**	**33.6**	1677	33.6	6	1578	35.7	1575	35.8	**1577**	**35.8**
444.namd	6	621	77.5	622	77.4	**621**	**77.4**	6	563	85.4	563	85.5	**563**	**85.4**
447.dealII	6	623	110	620	111	**621**	**111**	6	**461**	**149**	464	148	459	150
450.soplex	6	1193	41.9	**1189**	**42.1**	1188	42.1	6	1094	45.7	1086	46.1	**1089**	**46.0**
453.povray	6	**321**	**99.4**	321	99.4	321	99.6	6	267	120	266	120	**266**	**120**
454.calculix	6	456	109	459	108	**459**	**108**	6	403	123	404	122	**404**	**123**
459.GemsFDTD	6	**1948**	**32.7**	1948	32.7	1929	33.0	6	1914	33.3	**1906**	**33.4**	1905	33.4
465.tonto	6	**704**	**83.9**	707	83.5	703	83.9	6	586	101	591	99.9	**589**	**100**
470.lbm	6	2652	31.1	2641	31.2	**2649**	**31.1**	6	**2622**	**31.4**	2610	31.6	2629	31.4
481.wrf	6	**1092**	**61.4**	1091	61.4	1093	61.3	6	1061	63.2	1056	63.5	**1058**	**63.4**
482.sphinx3	6	1423	82.2	**1421**	**82.3**	1421	82.3	6	1330	87.9	1335	87.6	**1331**	**87.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores
 See the configuration file for details.
```

Operating System Notes

```
 'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152'  was used to set environment locked pages in memory limit

 Set vm/nr_hugepages=2700 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to HP Static High Performance Mode
  Memory channel mode set to Independent
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd0905is-libs/64:/cpu2006/amd0905is-libs/32"
NCPUS = "6"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64.
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:
-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:
-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:
-Mipa=jobs:4

C++ benchmarks:
-Mipa=jobs:4

Fortran benchmarks:
-Mipa=jobs:4

Benchmarks using both Fortran and C:
-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks (except as noted below):
openCC

Continued on next page

Peak Compiler Invocation (Continued)

444.namd: pgcpp

Fortran benchmarks (except as noted below):
openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):
pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre
-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge
-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64
-Bstatic_pgi

Peak Other Flags

C benchmarks:
-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.html
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.xml
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:21:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.