SPEC® CFP2006 Result

IBM Corporation

IBM Power 780 (3.86 GHz, 16 core)

SPECfp®_rate2006 = 586

SPECfp_rate_base2006 = 531

CPU2006 license:	11	**Test date:**	Jan-2010
Test sponsor:	IBM Corporation	**Hardware Availability:**	Mar-2010
Tested by:	IBM Corporation	**Software Availability:**	Mar-2010

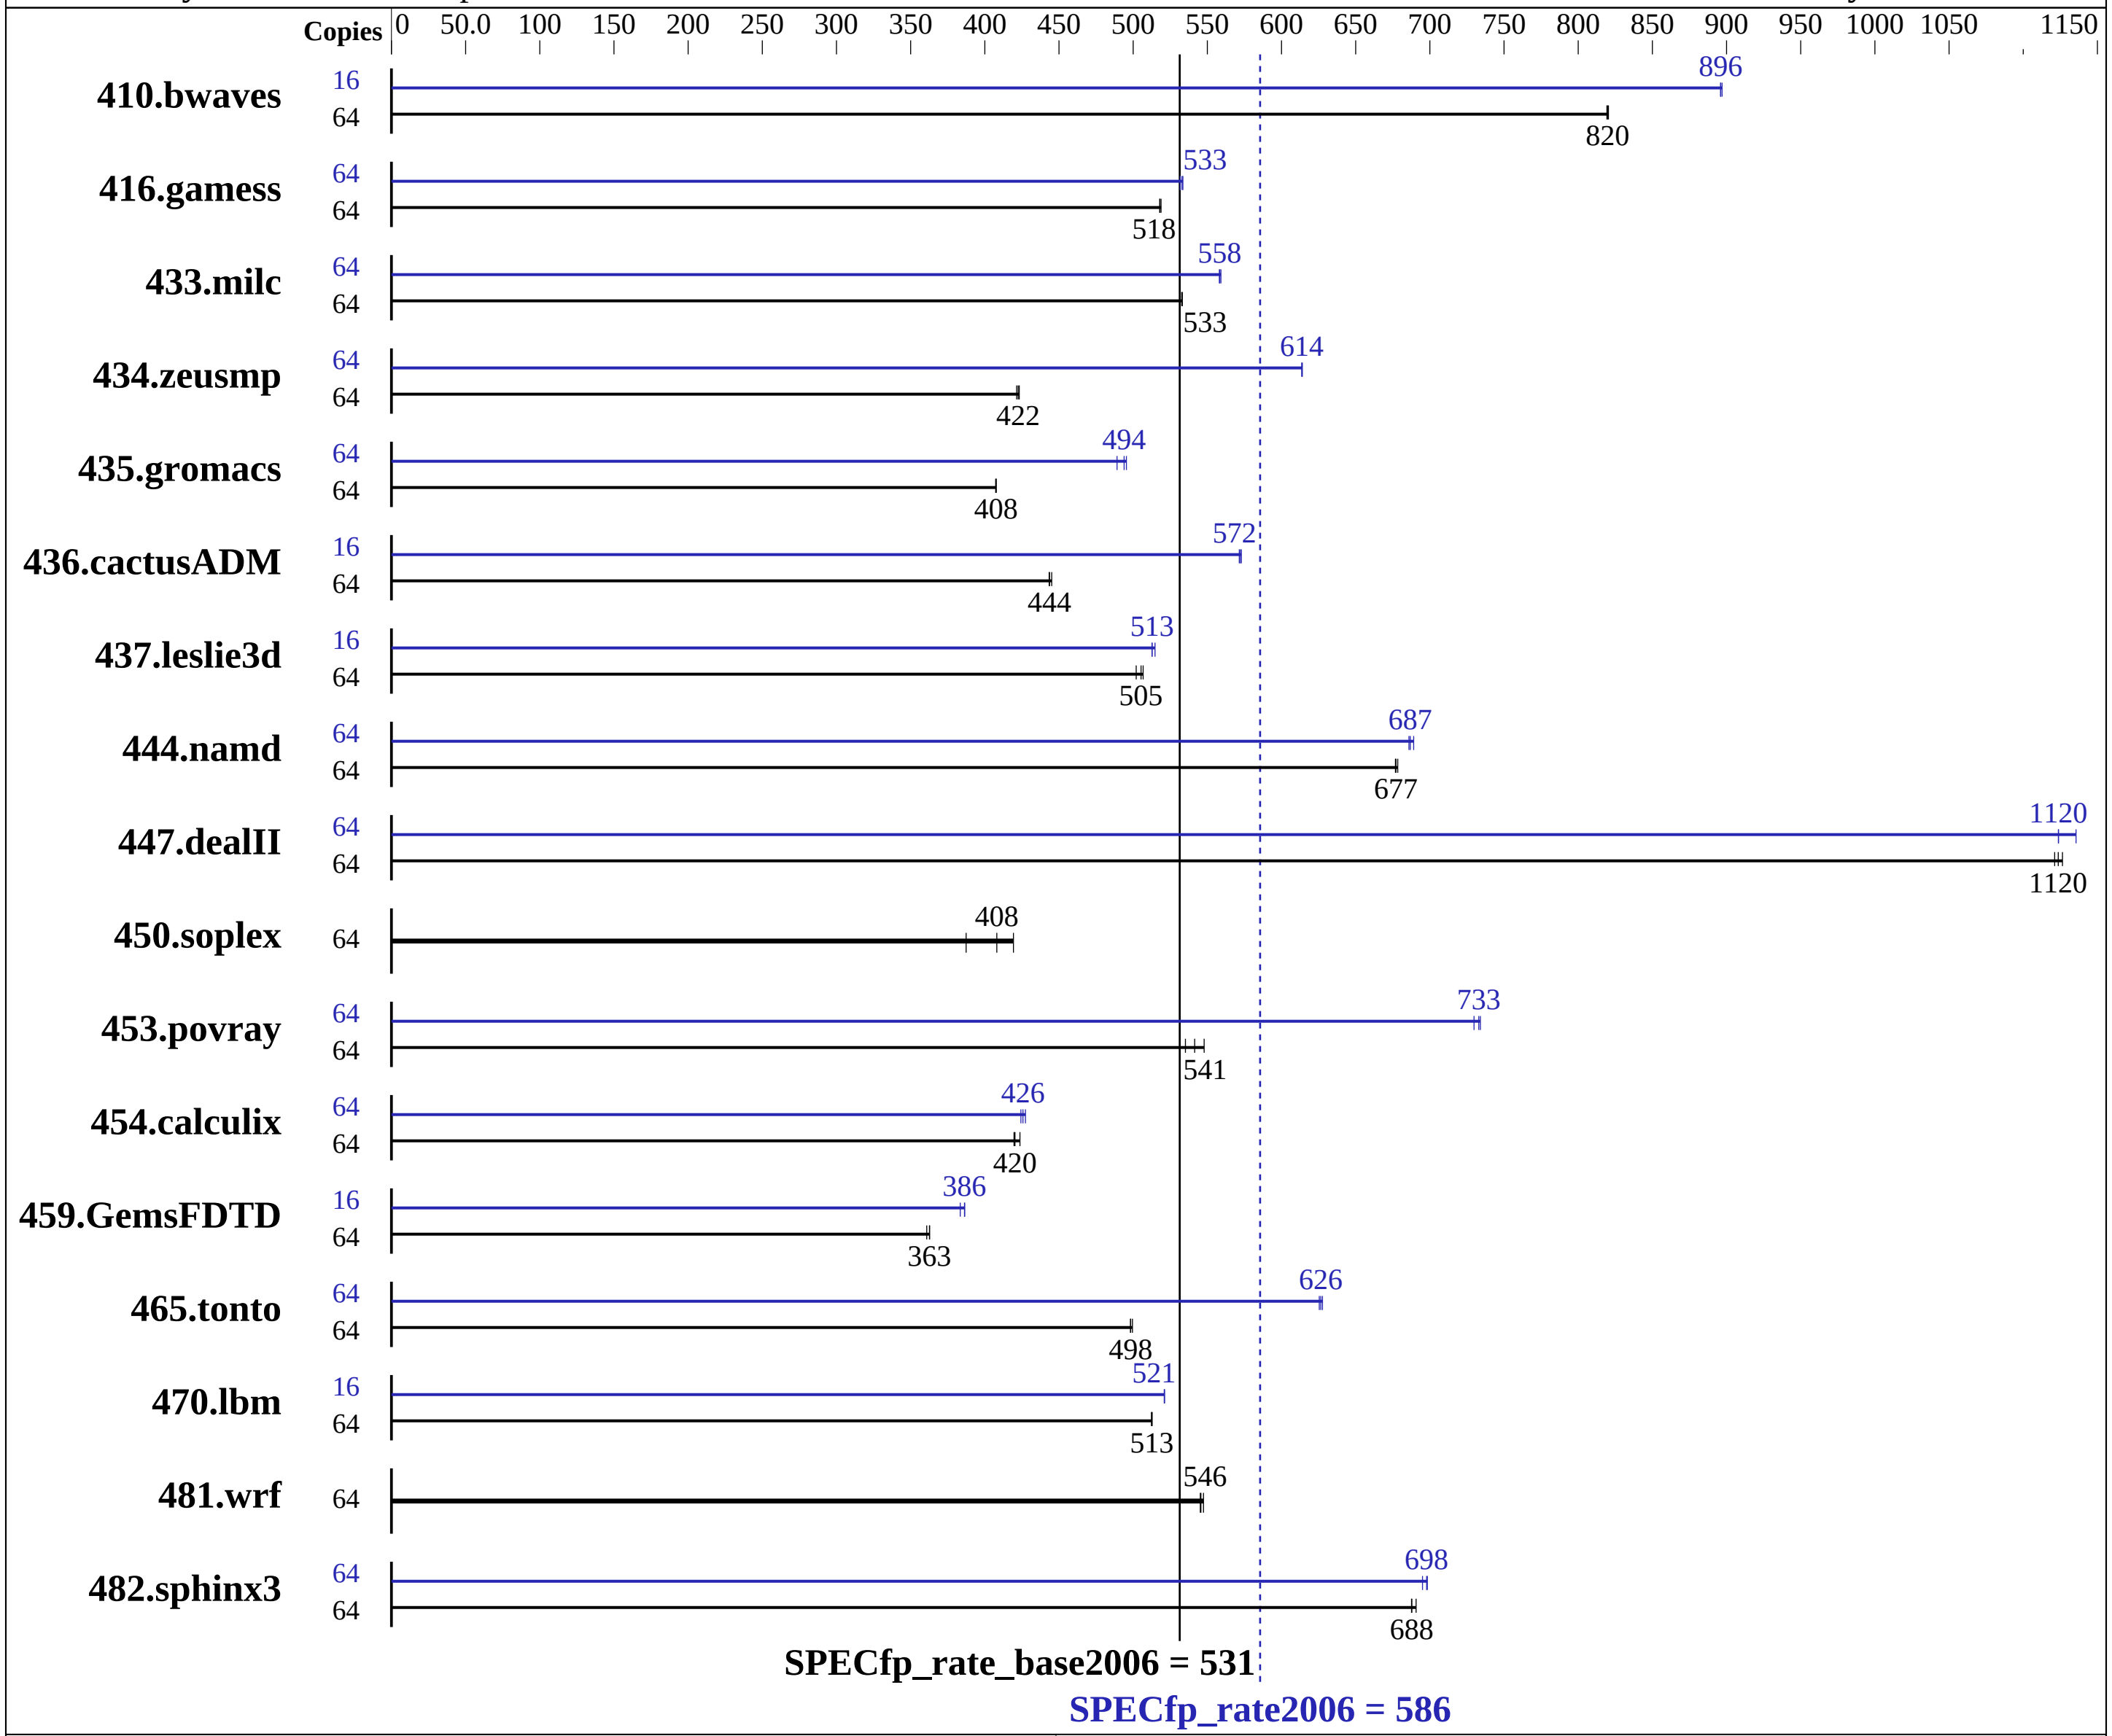

Hardware

CPU Name:	POWER7
CPU Characteristics:	Intelligent Energy Optimization enabled, up to 3.94 GHz
CPU MHz:	3860
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable:	8,16,24,32,48,64 cores
Primary Cache:	32 KB I + 32 KB D on chip per core

Continued on next page

Software

Operating System:	IBM AIX V6.1 with the 6100-04 Technology Level and Service Pack 3
Compiler:	XL C/C++ Enterprise Edition V10.1.0.5 for AIX XL Fortran Enterprise Edition V12.1.0.6 for AIX
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

IBM Corporation

IBM Power 780 (3.86 GHz, 16 core)

SPECfp_rate2006 = 586

SPECfp_rate_base2006 = 531

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation
Test date: Jan-2010
Hardware Availability: Mar-2010
Software Availability: Mar-2010

Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 4 MB I+D on chip per core
Other Cache: None
Memory: 128 GB (16x8 GB) DDR3 1066 MHz
Disk Subsystem: 6x146.8 GB SAS SFF 15K RPM
Other Hardware: None

Other Software: None

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	**1061**	**820**	1060	820	1062	819	16	242	897	243	896	**243**	**896**
416.gamess	64	2419	518	**2419**	**518**	2415	519	64	2357	532	**2352**	**533**	2349	534
433.milc	64	**1102**	**533**	1103	533	1102	533	64	1053	558	1051	559	**1052**	**558**
434.zeusmp	64	1382	421	**1379**	**422**	1376	423	64	**949**	**614**	949	614	948	614
435.gromacs	64	1122	407	**1121**	**408**	1121	408	64	922	495	**925**	**494**	934	489
436.cactusADM	64	**1724**	**444**	1725	443	1718	445	16	335	572	**334**	**572**	334	573
437.leslie3d	64	**1191**	**505**	1187	507	1198	502	16	292	515	**293**	**513**	293	513
444.namd	64	757	678	**758**	**677**	758	677	64	**747**	**687**	748	686	745	689
447.dealII	64	653	1120	**652**	**1120**	650	1130	64	645	1140	**652**	**1120**	652	1120
450.soplex	64	1273	419	**1308**	**408**	1378	387	64	1273	419	**1308**	**408**	1378	387
453.povray	64	621	548	636	535	**629**	**541**	64	467	730	464	734	**465**	**733**
454.calculix	64	**1256**	**420**	1246	424	1258	420	64	1244	424	1235	427	**1240**	**426**
459.GemsFDTD	64	1882	361	1872	363	**1872**	**363**	16	439	386	443	383	**439**	**386**
465.tonto	64	1264	498	1261	500	**1264**	**498**	64	1003	628	**1005**	**626**	1007	625
470.lbm	64	1716	512	1715	513	**1715**	**513**	16	**422**	**521**	422	521	422	521
481.wrf	64	1311	545	1306	547	**1310**	**546**	64	1311	545	1306	547	**1310**	**546**
482.sphinx3	64	1806	691	1814	688	**1813**	**688**	64	1795	695	1786	698	**1788**	**698**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```
fdpr binary optimization tool used for 410.bwaves
 with options -O3 -vrox -pbsi -A 64
fdpr binary optimization tool used for 433.milc
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 434.zeusmp
 with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 435.gromacs
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 437.leslie3d
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 450.soplex
 with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 453.povray
```

Continued on next page

Peak Tuning Notes (Continued)

```
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 454.calculix
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 459.GemsFDTD
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 470.lbm
 with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 481.wrf
 with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 482.sphinx3
 with options -O4 -vrox -pbsi
```

Submit Notes

```
The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).
```

Operating System Notes

```
all ulimits set to unlimited.
6400 16M large pages defined with vmo command
```

General Notes

```
Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTEOPTS = "intrinthds=1"

 See the flags file for details on settings.
```

Base Compiler Invocation

C benchmarks:
`/usr/vac/bin/xlc -qlanglvl=extc99`

C++ benchmarks:
`/usr/vacpp/bin/xlC`

Fortran benchmarks:
`/usr/bin/xlf95`

Benchmarks using both Fortran and C:
`/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95`

Base Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:
-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata

C++ benchmarks:
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata

Fortran benchmarks:
-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap
-qalias=nostd -blpdata

Benchmarks using both Fortran and C:
-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata

Base Other Flags

C benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

Fortran benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Benchmarks using both Fortran and C:
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:
 /usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:
 /usr/vacpp/bin/xlC

Fortran benchmarks:
 /usr/bin/xlf95

Benchmarks using both Fortran and C:
 /usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -qalign=natural -qfdpr -blpdata

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -D_ILS_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -blpdata

447.dealII: -bmaxdata:0x50000000 -O5 -D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qalign=natural -qfdpr -btextpsize:64K

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol -qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnvol -qxlf90=nosignedzero -qfdpr -blpdata

437.leslie3d: -O5 -qlargepage -qenablevmx -qvecnvol -qfdpr -blpdata

459.GemsFDTD: -O4 -qlargepage -q64 -qfdpr -blpdata

465.tonto: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -blpdata -btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2 -qarch=auto -qtune=auto -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr -qnostrict -blpdata -btextpsize:64K

454.calculix: -O4 -qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-036

Fortran benchmarks:
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

Continued on next page

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/IBM-XL.20100303.html
http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/IBM-XL.20100303.xml
http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:07:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 March 2010.