SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R715 (AMD Opteron 6174, 2.20 GHz)

SPECfp®_rate2006 = 315

SPECfp_rate_base2006 = 291

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2010
Hardware Availability: Mar-2010
Software Availability: Jul-2010

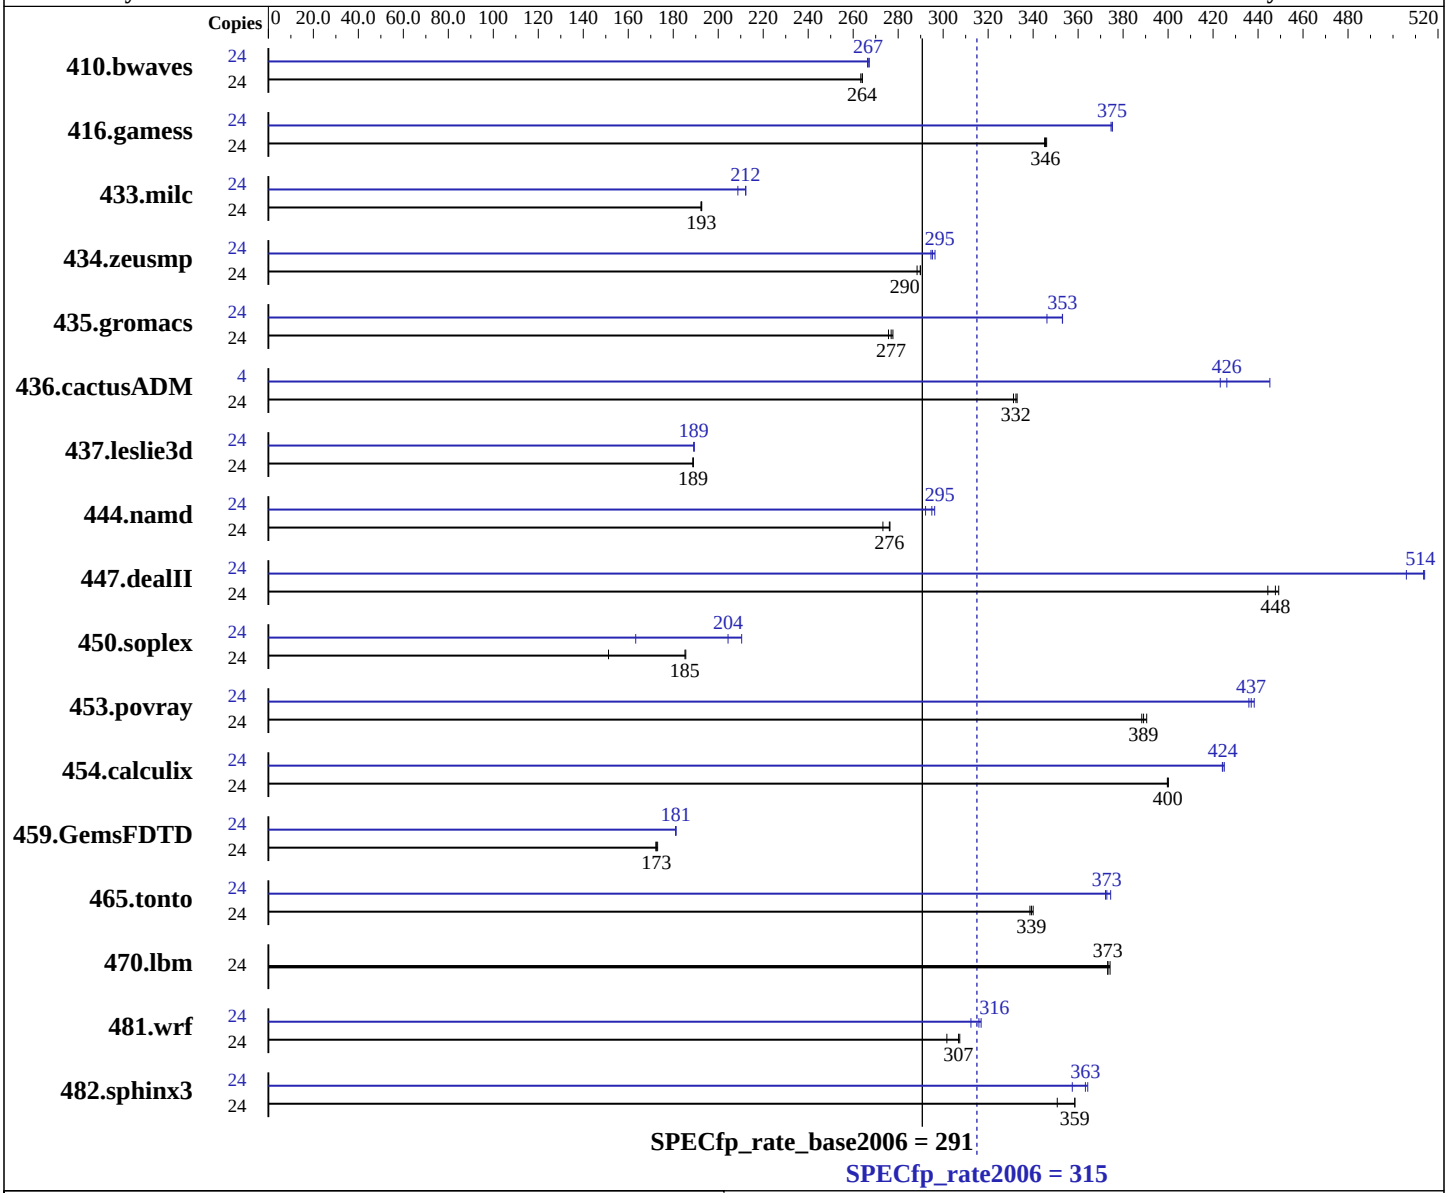

Hardware

CPU Name:	AMD Opteron 6174
CPU Characteristics:	
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) Kernel 2.6.27.19-5-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R715 (AMD Opteron 6174, 2.20 GHz)

SPECfp_rate2006 = 315

SPECfp_rate_base2006 = 291

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2010
Hardware Availability: Mar-2010
Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 64 GB (16 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)
Disk Subsystem: 1 x 146 GB SAS 10000 RPM SAS
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	**1235**	**264**	1235	264	1238	263	24	**1223**	**267**	1224	266	1221	267
416.gamess	24	**1360**	**346**	1358	346	1362	345	24	1254	375	**1253**	**375**	1252	375
433.milc	24	1146	192	1144	193	**1144**	**193**	24	1038	212	**1038**	**212**	1056	209
434.zeusmp	24	753	290	757	288	**754**	**290**	24	**740**	**295**	741	295	737	296
435.gromacs	24	622	276	**619**	**277**	617	278	24	**485**	**353**	495	346	485	353
436.cactusADM	24	**863**	**332**	866	331	862	333	4	113	423	**112**	**426**	107	445
437.leslie3d	24	**1195**	**189**	1195	189	1194	189	24	**1192**	**189**	1193	189	1192	189
444.namd	24	704	273	**697**	**276**	696	276	24	659	292	**653**	**295**	650	296
447.dealII	24	**613**	**448**	618	444	611	449	24	534	514	543	506	**535**	**514**
450.soplex	24	1324	151	1079	186	**1081**	**185**	24	1226	163	**979**	**204**	951	210
453.povray	24	**328**	**389**	327	390	329	388	24	293	436	**292**	**437**	291	438
454.calculix	24	495	400	**495**	**400**	495	400	24	**467**	**424**	467	424	466	425
459.GemsFDTD	24	**1476**	**173**	1471	173	1478	172	24	1405	181	1407	181	**1406**	**181**
465.tonto	24	695	340	**696**	**339**	697	339	24	635	372	**634**	**373**	631	374
470.lbm	24	884	373	**884**	**373**	881	374	24	884	373	**884**	**373**	881	374
481.wrf	24	889	302	**874**	**307**	872	307	24	858	312	846	317	**849**	**316**
482.sphinx3	24	1334	351	1305	359	**1305**	**359**	24	1309	357	**1288**	**363**	1284	364

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd1002-rate-libs-revC/64:/cpu2006/amd1002-rate-libs-revC/32"
OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on SLES10 SP2 with binutils 2.18
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m
```

C++ benchmarks:
```
-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m
```

Fortran benchmarks:
```
-march=barcelona -mso -Ofast -HP
```

Benchmarks using both Fortran and C:
```
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP
```

Peak Compiler Invocation

C benchmarks:
```
opencc
```

C++ benchmarks:
```
openCC
```

Fortran benchmarks:
```
openf95
```

Benchmarks using both Fortran and C:
```
opencc openf95
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page

Peak Optimization Flags (Continued)

437.leslie3d: `-march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m`

459.GemsFDTD: `-march=barcelona -mso -Ofast -LNO:fission=2 -LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1 -HP`

465.tonto: `-march=barcelona -mso -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP`

Benchmarks using both Fortran and C:

435.gromacs: `-march=barcelona -mso -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m`

436.cactusADM: `-march=barcelona -mso -fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -apo -LNO:prefetch_ahead=1 -HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100`

454.calculix: `-march=barcelona -mso -Ofast -CG:load_exe=0 -CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on -LNO:prefetch_ahead=30 -WOPT:unroll=2 -GRA:optimize_boundary=on -HP:bdt=2m:heap=2m`

481.wrf: `-march=barcelona -mso -Ofast -LNO:blocking=off -LNO:prefetch_ahead=10 -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow -HP`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:59:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 September 2010.