SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M4000

SPECfp®_rate2006 = 140

SPECfp_rate_base2006 = 127

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

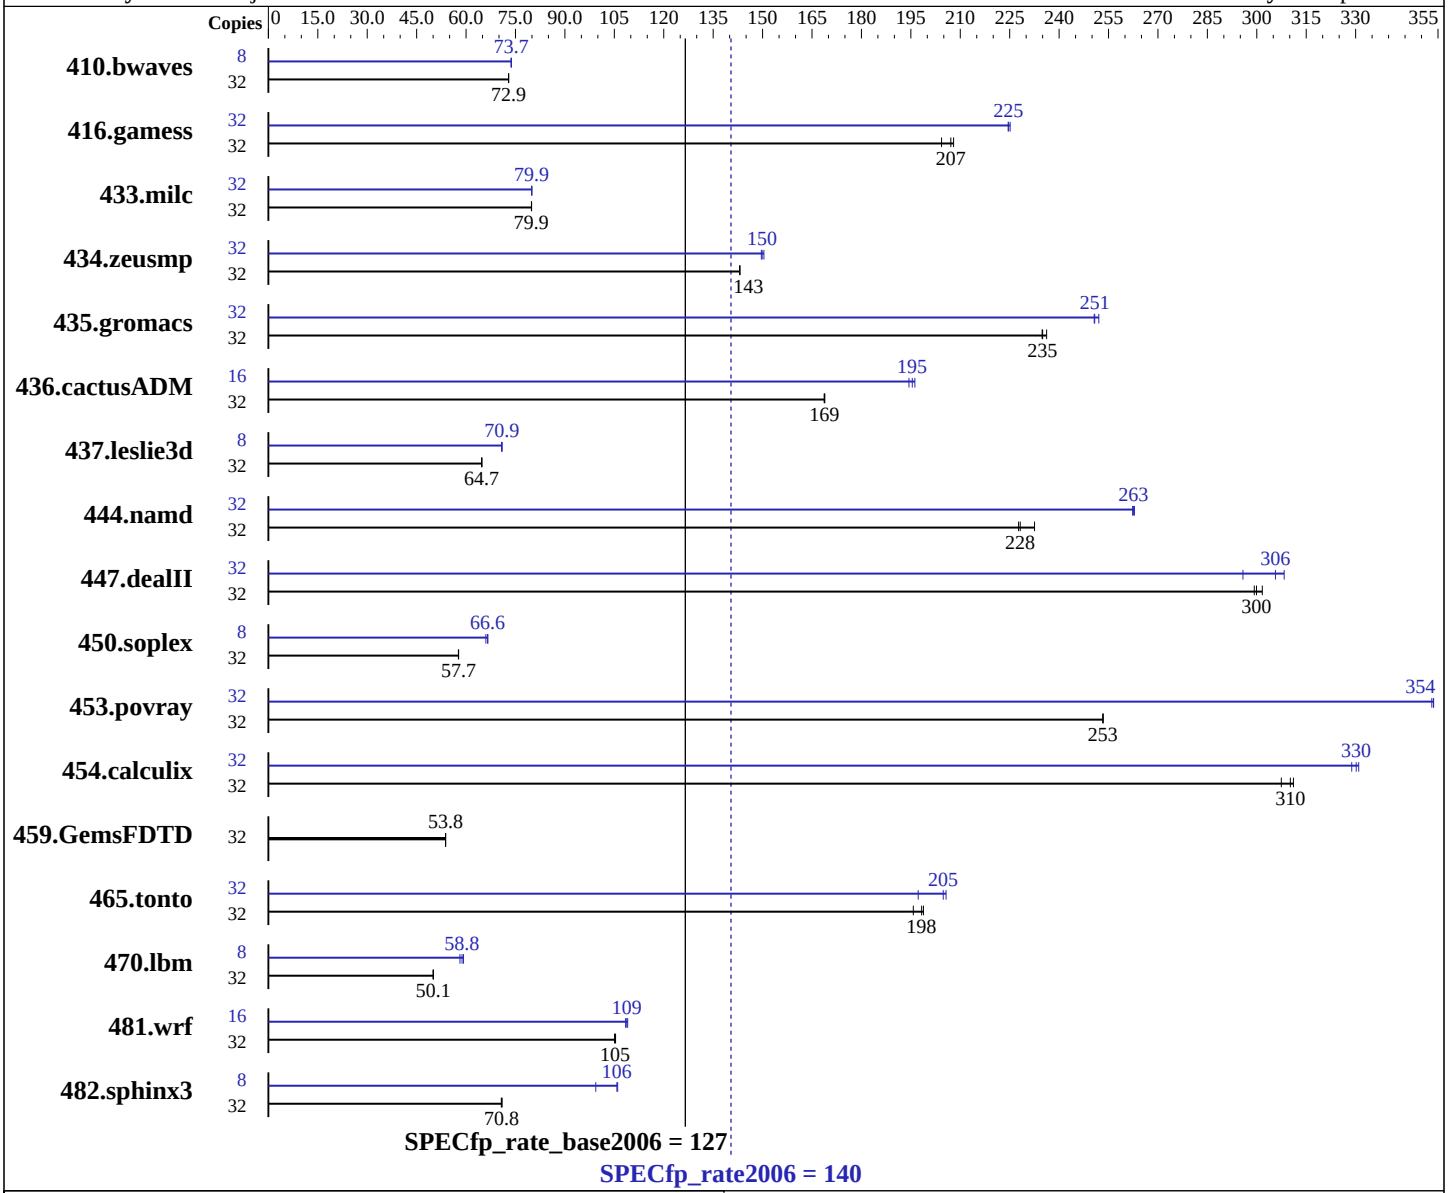

Hardware

CPU Name:	SPARC64 VII+
CPU Characteristics:	
CPU MHz:	2660
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 to 2 CPUMs; each CPUM contains 2 CPU chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	11 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Oracle Solaris 10 9/10
Compiler:	Oracle Solaris Studio 12.2
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation
SPARC Enterprise M4000

SPECfp_rate2006 = 140

SPECfp_rate_base2006 = 127

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Fujitsu

Test date: Oct-2010
Hardware Availability: Dec-2010
Software Availability: Sep-2010

L3 Cache: None
Other Cache: None
Memory: 128 GB (32 x 4 GB, 8-way interleaved)
Disk Subsystem: 1 x 300 GB 10,000 RPM SAS
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	5965	72.9	5964	72.9	**5965**	**72.9**	8	**1474**	**73.7**	1476	73.7	1473	73.8
416.gamess	32	3013	208	**3025**	**207**	3067	204	32	2790	225	**2789**	**225**	2783	225
433.milc	32	3679	79.8	3677	79.9	**3679**	**79.9**	32	3675	79.9	3674	80.0	**3675**	**79.9**
434.zeusmp	32	2035	143	**2035**	**143**	2036	143	32	1936	150	1946	150	**1943**	**150**
435.gromacs	32	**972**	**235**	967	236	973	235	32	906	252	912	251	**911**	**251**
436.cactusADM	32	**2265**	**169**	2267	169	2265	169	16	**978**	**195**	983	194	974	196
437.leslie3d	32	4640	64.8	**4647**	**64.7**	4649	64.7	8	**1061**	**70.9**	1060	70.9	1062	70.8
444.namd	32	1127	228	**1125**	**228**	1104	233	32	976	263	**978**	**263**	978	262
447.dealII	32	**1221**	**300**	1223	299	1214	302	32	**1198**	**306**	1238	296	1187	308
450.soplex	32	**4625**	**57.7**	4622	57.7	4627	57.7	8	1011	66.0	**1002**	**66.6**	1002	66.6
453.povray	32	672	253	**672**	**253**	672	253	32	**481**	**354**	481	354	482	353
454.calculix	32	859	307	**851**	**310**	849	311	32	803	329	798	331	**800**	**330**
459.GemsFDTD	32	**6312**	**53.8**	6314	53.8	6312	53.8	32	**6312**	**53.8**	6314	53.8	6312	53.8
465.tonto	32	1609	196	1584	199	**1588**	**198**	32	1531	206	**1537**	**205**	1597	197
470.lbm	32	8786	50.0	8784	50.1	**8784**	**50.1**	8	**1870**	**58.8**	1890	58.1	1856	59.2
481.wrf	32	3392	105	3402	105	**3396**	**105**	16	1648	108	1639	109	**1643**	**109**
482.sphinx3	32	8821	70.7	8795	70.9	**8805**	**70.8**	8	**1474**	**106**	1471	106	1569	99.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
 Oracle Solaris Studio 12.2 is distributed with mandatory OS patches
  118683-05  119963-20  120753-08
 Oracle Solaris Studio 12.2 and patches are available at
  http://oracle.com/goto/solarisstudio

The Apache C++ Standard Library V4.2.1 was installed from
   http://stdcxx.apache.org/download.html using:
     alias gmake=specmake
     gmake BUILDTYPE=8d CONFIG=sunpro.config
```

Submit Notes

```
Processes were assigned to specific processors using 'pbind'
commands.  The config file option 'submit' was used, along
with a list of processors in the 'BIND' variable, to generate
the pbind commands.  (For details, please see the config file.)
```

Operating System Notes

```
ulimit -s 131072 was used to allow the stack to grow
up to 131072 KB (aka 128 MB).  Note that saying "131072"
is preferable to "unlimited", because there is a tradeoff
between space for the stack vs. space for the heap.


System Tunables (/etc/system parameters):

tune_t_fsflushr=10
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
autoup=600
    Causes pages older than the listed number of seconds to
    be written by fsflush.

Other System Settings:

The webconsole service was turned off using
    svcadm disable webconsole
```

Platform Notes

```
Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result is measured on a SPARC Enterprise M4000 server from
Fujitsu.  The SPARC Enterprise M4000 server from Oracle and from
Fujitsu are electrically equivalent.
```

General Notes

```
447.dealII (peak): "apache_stdcxx_4_2_1" src.alt was used.

447.dealII (base): "apache_stdcxx_4_2_1" src.alt was used.
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xlinkopt -xvector
-xalias_level=std -xprefetch_auto_type=indirect_array_access
-xprefetch_level=3

C++ benchmarks:
-xdepend -fast -fma=fused -xipo=2 -xpagesize=4M -xlinkopt -xvector
-xalias_level=compatible -xprefetch=latx:0.5 -library=no%Cstd
-I/mnt/spec//stdcxx-4.2.1/include
-I/mnt/spec//stdcxx-4.2.1/build/include
-L/mnt/spec//stdcxx-4.2.1/build/lib -R/mnt/spec//stdcxx-4.2.1/build/lib
-lstd8d

Fortran benchmarks:
-fast -fma=fused -xipo=2 -xpagesize=4M -xlinkopt -xvector
-xprefetch_level=2

Benchmarks using both Fortran and C:
-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M -xlinkopt
-xvector -xalias_level=std -xprefetch_auto_type=indirect_array_access
-xprefetch_level=3 -xprefetch_level=2

Base Other Flags

C benchmarks:
-xjobs=32 -V -#

C++ benchmarks:
-xjobs=32 -verbose=diags,version

Fortran benchmarks:
-xjobs=32 -V -v

Continued on next page

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
`-xjobs=32 -V -# -v`

Peak Compiler Invocation

C benchmarks:
`cc`

C++ benchmarks:
`CC`

Fortran benchmarks:
`f90`

Benchmarks using both Fortran and C:
`cc f90`

Peak Optimization Flags

C benchmarks:

433.milc: `-xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast -xpagesize=4M`
`-fma=fused -xipo=2 -xarch=generic -fsimple=1`
`-W2,-Ainline:rs=400 -xalias_level=std`
`-xprefetch_auto_type=indirect_array_access -xprefetch_level=2`

470.lbm: `-fast -xpagesize=4M -fma=fused -xipo=2 -xarch=generic`
`-xvector -xunroll=8 -xprefetch=latx:2`

482.sphinx3: `-fast -xpagesize=4M -fma=fused -xalias_level=std`
`-M /usr/lib/ld/map.bssalign -xipo=2 -xprefetch_level=2`
`-xunroll=4 -xprefetch=latx:1.2 -ll2amm`

C++ benchmarks:

444.namd: `-xdepend -xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast -xpagesize=4M`
`-fma=fused -xalias_level=compatible -library=stlport4`
`-xalias_level=any -xchip=generic -xunroll=2`

447.dealII: `-xdepend -fast -xpagesize=4M -fma=fused`
`-xalias_level=compatible -library=no%Cstd`
`-I/mnt/spec//stdcxx-4.2.1/include`
`-I/mnt/spec//stdcxx-4.2.1/build/include -xipo=2`
`-xprefetch=latx:0.5 -L/mnt/spec//stdcxx-4.2.1/build/lib`
`-R/mnt/spec//stdcxx-4.2.1/build/lib -lstd8d`

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xprefetch_level=2 -xprefetch_auto_type=indirect_array_access
-Qoption cg -Qlp-ol=1 -Qoption cg -Qlp-it=3
-Qoption cg -Qlp-imb=1 -Qoption iropt -Apf:pdl=3
-xalias_level=simple -xrestrict -library=stlport4

453.povray: -xdepend -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xalias_level=compatible -library=stlport4 -xO4
-xipo=2 -xprefetch=no%auto -xunroll=4 -xlinkopt=2 -lfast

Fortran benchmarks:

410.bwaves: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch_level=2

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xprefetch=no%auto -xO3

434.zeusmp: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch=no%auto
-xunroll=3 -ll2amm

437.leslie3d: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -M /usr/lib/ld/map.bssalign -xipo=2
-xprefetch_level=1 -xunroll=7 -ll2amm

459.GemsFDTD: basepeak = yes

465.tonto: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-fma=fused -xipo=2 -xprefetch=no%auto -xO4 -xunroll=3
-lfast

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xprefetch=no%auto
-xchip=generic -xinline= -fsimple=0 -xunroll=3

436.cactusADM: -fast(cc) -fast(f90) -xpagesize=4M -fma=fused -xipo=2
-xprefetch=latx:0.7 -fsimple=1

454.calculix: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -fma=fused -xipo=2 -xvector -xunroll=8
-xprefetch=latx:3 -xalias_level=std

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-fast`(cc) `-fast`(f90) `-xpagesize=4M -fma=fused -xalias_level=std -xipo=2 -xcache=generic -xunroll=5 -xprefetch=latx:2`

Peak Other Flags

C benchmarks:
`-xjobs=32 -V -#`

C++ benchmarks:
`-xjobs=32 -verbose=diags,version`

Fortran benchmarks:
`-xjobs=32 -V -v`

Benchmarks using both Fortran and C:
`-xjobs=32 -V -# -v`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20101221.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.2-SPARC.20101221.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 13:50:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 December 2010.