SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Yadro

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECrate2017_int_base = 166

SPECrate2017_int_peak = Not Run

CPU2017 License: 4813
Test Sponsor: Yadro
Tested by: Yadro

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Dec-2016

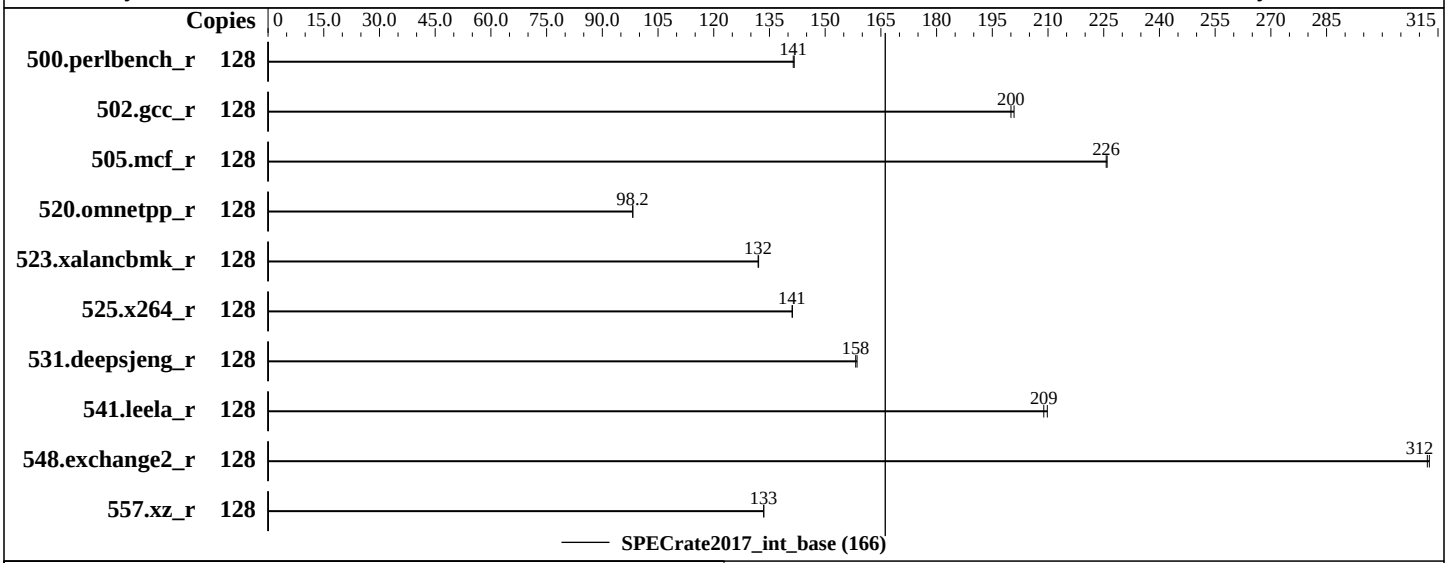

Hardware

CPU Name:	IBM POWER8
Max MHz.:	3857
Nominal:	3325
Enabled:	32 cores, 4 chips, 4 threads/core
Orderable:	1-4 chips
Cache L1:	32 KB I + 64 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	8 MB I+D on chip per core
Other:	16 MB I+D off chip per 8 DIMMs
Memory:	8 TB (128 x 64 GB 4Rx4 PC4 - 2400T, running at 1600)
Storage:	2 x 2.9 TB NVMe SSD
Other:	None

Software

OS:	RHEL 7.2 Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.el7.ppc64le
Compiler:	C/C++: Version 13.1.5 of IBM XL C/C++; Fortran: Version 15.1.5 of IBM XL Fortran
Parallel:	No
Firmware:	Version 1.19 of OpenPOWER Firmware. Released Nov-2017.
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None

SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Yadro

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECrate2017_int_base = 166

SPECrate2017_int_peak = Not Run

CPU2017 License: 4813
Test Sponsor: Yadro
Tested by: Yadro

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Dec-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	1438	142	**1441**	**141**									
502.gcc_r	128	**906**	**200**	902	201									
505.mcf_r	128	**917**	**226**	916	226									
520.omnetpp_r	128	**1710**	**98.2**	1710	98.2									
523.xalancbmk_r	128	**1024**	**132**	1023	132									
525.x264_r	128	1587	141	**1589**	**141**									
531.deepsjeng_r	128	925	159	**927**	**158**									
541.leela_r	128	**1015**	**209**	1010	210									
548.exchange2_r	128	1073	313	**1074**	**312**									
557.xz_r	128	1036	133	**1036**	**133**									

SPECrate2017_int_base = 166

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
"ppc64_cpu --smt=4" used to set SMT4 mode (see flags file for details).

Binaries were compiled on a system with 4x POWER8 chips + 4 TB Memory using rhel 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using
the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available.  At the time of
this publication, it may not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the SPEC OSG Policy document,
http://www.spec.org/osg/policy.html

This measured result may not be representative of the result that would be measured were this
benchmark run with hardware and software available as of the publication date.
```

Platform Notes

```
Sysinfo program /home/build/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on localhost.localdomain Sun Dec 17 23:10:41 2017
```

(Continued on next page)

Platform Notes (Continued)

```
SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
  'clock : ' reported by /proc/cpuinfo may not be reliable. Use with caution.
   cpu : POWER8 (raw), altivec supported
   clock : 3857.000000MHz
   machine : PowerNV 0000000000000000
   model : 0000000000000000
   platform : PowerNV
   revision : 2.0 (pvr 004d 0200)

Number of cores, from 'ppc64_cpu --cores-present' :  32

WARNING regarding the output of 'lscfg':  this utility reports resources for the system,
not the current partition.  Therefore, for a partition that has a subset of the full
system resources:
   (1) The tester may need to adjust the sysinfo-supplied 'hw_ncores'.
   (2) The tester may need to adjust the sysinfo-supplied 'hw_nchips'.

Processors, from lscfg -vp
   Node:  processor@0
   Node:  processor@8
   Node:  processor@10
   Node:  processor@18
      128 "processors"

From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
physical chip.
  available: 4 nodes (0,8,16,24)
  node 0 cpus: 0 1 2 3 8 9 10 11 16 17 18 19 24 25 26 27 32 33 34 35 40 41 42 43 48 49 50
  51 56 57 58 59
  node 0 size: 2097152 MB
  node 0 free: 2013804 MB
  node 8 cpus: 64 65 66 67 72 73 74 75 80 81 82 83 88 89 90 91 96 97 98 99 104 105 106
  107 112 113 114 115 120 121 122 123
  node 8 size: 2097152 MB
  node 8 free: 1994142 MB
  node 16 cpus: 128 129 130 131 136 137 138 139 144 145 146 147 152 153 154 155 160 161
  162 163 168 169 170 171 176 177 178 179 184 185 186 187
  node 16 size: 2097152 MB
  node 16 free: 1996680 MB
  node 24 cpus: 192 193 194 195 200 201 202 203 208 209 210 211 216 217 218 219 224 225
  226 227 232 233 234 235 240 241 242 243 248 249 250 251
  node 24 size: 2097152 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 24 free: 2010028 MB
   node distances:
   node   0   8  16  24
     0:  10  40  40  40
     8:  40  10  40  40
    16:  40  40  10  40
    24:  40  40  40  10

 From /proc/meminfo
    MemTotal:       8569843072 kB
    HugePages_Total:   16000
    Hugepagesize:      16384 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux Server"
       VERSION="7.2 (Maipo)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="7.2"
       PRETTY_NAME="Red Hat Enterprise Linux"
       ANSI_COLOR="0;31"
       CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
    redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
    system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

 uname -a:
    Linux localhost.localdomain 3.10.0-327.el7.ppc64le #1 SMP Thu Oct 29 17:31:13 EDT 2015
    ppc64le ppc64le ppc64le GNU/Linux

 run-level 3 2017-12-17 21:36

 SPEC is set to: /home/build/cpu2017
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   2.9T  688G  2.2T  24% /home

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
 CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
------------------------------------------------------------------------------
IBM XL C/C++ for Linux, V13.1.5 (Community Edition)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Version: 13.01.0005.0001
Driver Version: 13.1.5(C/C++) Level: 161202 ID: _FJC-kLh6EeabvOJ9E16jqw
C/C++ Front End Version: 13.1.5(C/C++) Level: 161129 ID:
  _XUlJoJsoEeabgOJ9E16jqw
High-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161201
  ID: _LqhNgLg4EeabvOJ9E16jqw
Low-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161129
  ID: _dlqc0afDEeabg-J9E16jqw
/opt/ibm/xlC/13.1.5/bin/.orig/xlC: note: XL C/C++ Community Edition is a
  no-charge product and does not include official IBM support. You can
  provide feedback at the XL on POWER C/C++ Community Edition forum
  (http://ibm.biz/xlcpp-linux-ce). For information about a fully supported XL
  C/C++ compiler, visit XL C/C++ for Linux (http://ibm.biz/xlcpp-linux).
------------------------------------------------------------------------------

==============================================================================
 CC  500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
     557.xz_r(base)
------------------------------------------------------------------------------
IBM XL C/C++ for Linux, V13.1.5 (Community Edition)
Version: 13.01.0005.0001
Driver Version: 13.1.5(C/C++) Level: 161202 ID: _FJC-kLh6EeabvOJ9E16jqw
C/C++ Front End Version: 13.1.5(C/C++) Level: 161129 ID:
  _XUlJoJsoEeabgOJ9E16jqw
High-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161201
  ID: _LqhNgLg4EeabvOJ9E16jqw
Low-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161129
  ID: _dlqc0afDEeabg-J9E16jqw
/opt/ibm/xlC/13.1.5/bin/.orig/xlc: note: XL C/C++ Community Edition is a
  no-charge product and does not include official IBM support. You can
  provide feedback at the XL on POWER C/C++ Community Edition forum
  (http://ibm.biz/xlcpp-linux-ce). For information about a fully supported XL
  C/C++ compiler, visit XL C/C++ for Linux (http://ibm.biz/xlcpp-linux).
------------------------------------------------------------------------------

==============================================================================
 FC  548.exchange2_r(base)
------------------------------------------------------------------------------
IBM XL Fortran for Linux, V15.1.5 (Community Edition)
Version: 15.01.0005.0001
Driver Version: 15.1.5(Fortran) Level: 161202 ID: _FJC-kLh6EeabvOJ9E16jqw
Fortran Front End and Run Time Version: 15.1.5(Fortran) Level: 161202 ID:
  _i9fBcbirEeabvOJ9E16jqw
Fortran Transformer Version: 15.1.5(Fortran) Level: 161129 ID:
  _dYoGZafDEeabg-J9E16jqw
High-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161201
  ID: _LqhNgLg4EeabvOJ9E16jqw
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Low-Level Optimizer Version: 13.1.5(C/C++) and 15.1.5(Fortran) Level: 161129
  ID: _dlqc0afDEeabg-J9E16jqw
/opt/ibm/xlf/15.1.5/bin/.orig/xlf95: 1501-303 (I) XL Fortran Community
  Edition is a no-charge product and does not include official IBM support.
  You can provide feedback at the XL on POWER Fortran Community Edition forum
  (http://ibm.biz/xlfortran-linux-ce). For information about a fully
  supported XL Fortran compiler, visit XL Fortran for Linux
  (http://ibm.biz/xlfortran-linux).
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`/opt/ibm/xlC/13.1.5/bin/xlc -qlanglvl=extc99`

C++ benchmarks:
`/opt/ibm/xlC/13.1.5/bin/xlC`

Fortran benchmarks:
`/opt/ibm/xlf/15.1.5/bin/xlf95`

Base Portability Flags

500.perlbench_r: `-DSPEC_LINUX_PPC_LE -DSPEC_LP64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -DSPEC_LP64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-Wl,-z,muldefs -O5 -q64 -qinline=40 -qipa=threads -qsimd=noauto -qalias=noansi`

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:
`-O5 -q64 -qinline=40 -qipa=threads -qsimd=noauto`

Fortran benchmarks:
`-O5 -q64 -qinline=40 -qipa=threads -qsimd=noauto`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/vesnin_xl-V1.2.html`
`http://www.spec.org/cpu2017/flags/vesnin_platform-V1.3.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/vesnin_xl-V1.2.xml`
`http://www.spec.org/cpu2017/flags/vesnin_platform-V1.3.xml`

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.1 on 2017-12-17 15:10:40-0500.
Report generated on 2018-10-31 17:14:10 by CPU2017 PS formatter v6067.
Originally published on 2018-03-08.