SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECspeed®2017_fp_base = 121

SPECspeed®2017_fp_peak = 127

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2020
Hardware Availability: Apr-2020
Software Availability: Aug-2019

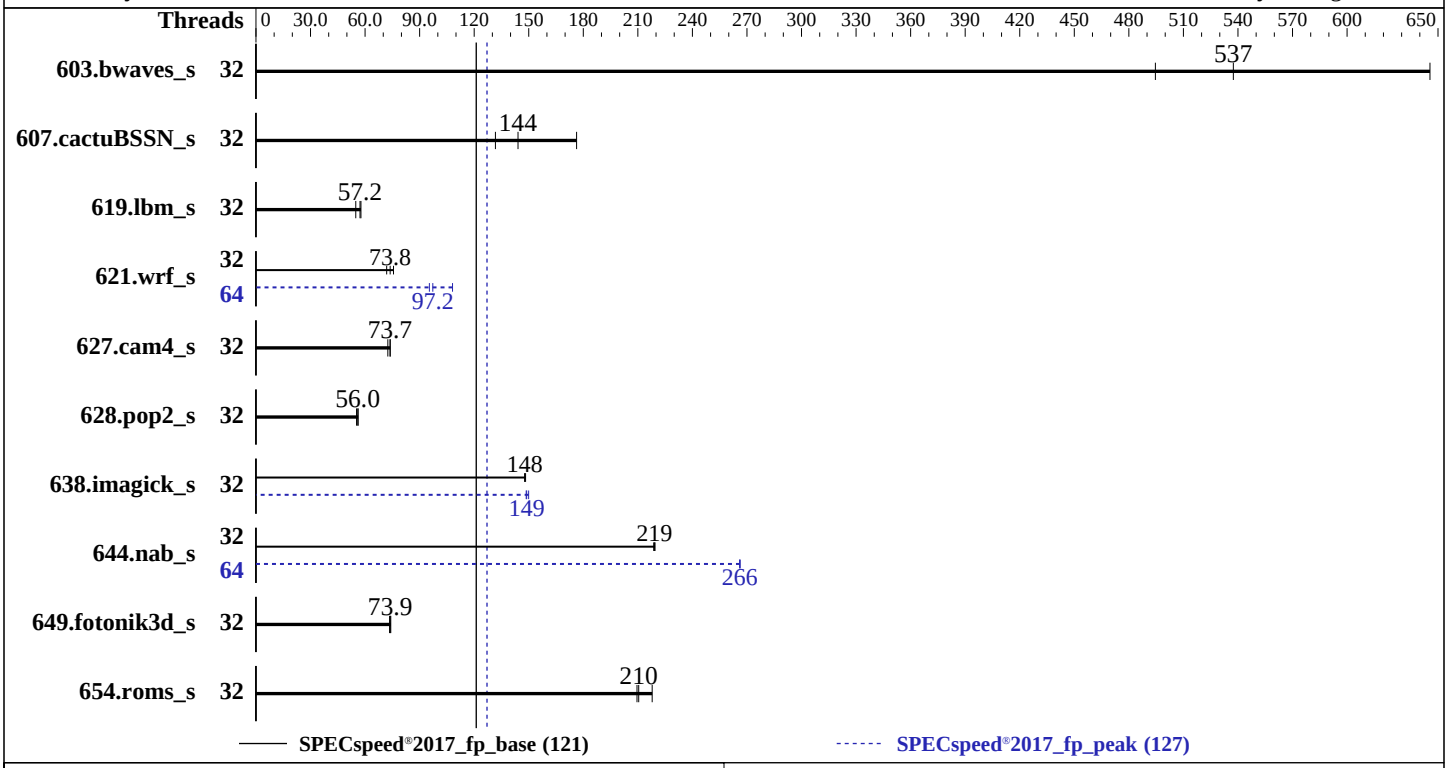

Hardware

CPU Name:	AMD EPYC 7F52
Max MHz:	3900
Nominal:	3500
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB per core
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP1 kernel 4.12.14-197.7-default
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.2.4 released Dec-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.2.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	91.4	646	**110**	**537**	119	495	32	91.4	646	**110**	**537**	119	495
607.cactuBSSN_s	32	94.5	176	**116**	**144**	127	132	32	94.5	176	**116**	**144**	127	132
619.lbm_s	32	**91.5**	**57.2**	90.7	57.7	95.4	54.9	32	**91.5**	**57.2**	90.7	57.7	95.4	54.9
621.wrf_s	32	175	75.6	**179**	**73.8**	184	71.9	64	**136**	**97.2**	139	95.4	122	108
627.cam4_s	32	120	73.8	**120**	**73.7**	122	72.5	32	120	73.8	**120**	**73.7**	122	72.5
628.pop2_s	32	**212**	**56.0**	211	56.2	215	55.3	32	**212**	**56.0**	211	56.2	215	55.3
638.imagick_s	32	97.3	148	**97.5**	**148**	97.6	148	32	**96.9**	**149**	96.2	150	97.1	149
644.nab_s	32	79.6	219	**79.7**	**219**	79.9	219	64	65.7	266	65.6	266	**65.7**	**266**
649.fotonik3d_s	32	124	73.5	123	74.1	**123**	**73.9**	32	124	73.5	123	74.1	**123**	**73.9**
654.roms_s	32	72.3	218	**74.8**	**210**	75.1	210	32	72.3	218	**74.8**	**210**	75.1	210

SPECspeed®2017_fp_base = **121**

SPECspeed®2017_fp_peak = **127**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
     "/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0
     /amd_speed_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42
     11 43 12 44 13 45 14 46 15 47 16 48 17 49 18 50 19 51 20 52 21 53 22 54
     23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42
     11 43 12 44 13 45 14 46 15 47 16 48 17 49 18 50 19 51 20 52 21 53 22 54
     23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

Platform Notes

```
 BIOS settings:
 NUMA Nodes Per Socket set to 4
 CCX as NUMA Domain set to Enabled
```

(Continued on next page)

Platform Notes (Continued)

```
System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost Enabled
Cstates set to Enabled
Memory Patrol Scrub Disabled
Memory Refresh Rate set to 1x
PCI ASPM L1 Link Power Management Disabled
Determinism Slider set to Power Determinism
Efficiency Optimized Mode Disabled
Memory Interleaving set to Disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on suse15-sp1 Thu Jan  2 05:21:58 2098

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7F52 16-Core Processor
      2  "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
      physical 1: cores 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     Address sizes:       43 bits physical, 48 bits virtual
     CPU(s):              64
     On-line CPU(s) list: 0-63
     Thread(s) per core:  2
     Core(s) per socket:  16
     Socket(s):           2
     NUMA node(s):        32
     Vendor ID:           AuthenticAMD
     CPU family:          23
     Model:               49
     Model name:          AMD EPYC 7F52 16-Core Processor
     Stepping:            0
```

(Continued on next page)

Platform Notes (Continued)

```
CPU MHz:             3493.517
BogoMIPS:            6987.03
Virtualization:      AMD-V
L1d cache:           32K
L1i cache:           32K
L2 cache:            512K
L3 cache:            16384K
NUMA node0 CPU(s):   0,32
NUMA node1 CPU(s):   1,33
NUMA node2 CPU(s):   2,34
NUMA node3 CPU(s):   3,35
NUMA node4 CPU(s):   4,36
NUMA node5 CPU(s):   5,37
NUMA node6 CPU(s):   6,38
NUMA node7 CPU(s):   7,39
NUMA node8 CPU(s):   8,40
NUMA node9 CPU(s):   9,41
NUMA node10 CPU(s):  10,42
NUMA node11 CPU(s):  11,43
NUMA node12 CPU(s):  12,44
NUMA node13 CPU(s):  13,45
NUMA node14 CPU(s):  14,46
NUMA node15 CPU(s):  15,47
NUMA node16 CPU(s):  16,48
NUMA node17 CPU(s):  17,49
NUMA node18 CPU(s):  18,50
NUMA node19 CPU(s):  19,51
NUMA node20 CPU(s):  20,52
NUMA node21 CPU(s):  21,53
NUMA node22 CPU(s):  22,54
NUMA node23 CPU(s):  23,55
NUMA node24 CPU(s):  24,56
NUMA node25 CPU(s):  25,57
NUMA node26 CPU(s):  26,58
NUMA node27 CPU(s):  27,59
NUMA node28 CPU(s):  28,60
NUMA node29 CPU(s):  29,61
NUMA node30 CPU(s):  30,62
NUMA node31 CPU(s):  31,63
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
```

(Continued on next page)

Platform Notes (Continued)

```
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
      lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
      pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 32 nodes (0-31)
    node 0 cpus: 0 32
    node 0 size: 15677 MB
    node 0 free: 15613 MB
    node 1 cpus: 1 33
    node 1 size: 16127 MB
    node 1 free: 16046 MB
    node 2 cpus: 2 34
    node 2 size: 16127 MB
    node 2 free: 16081 MB
    node 3 cpus: 3 35
    node 3 size: 16126 MB
    node 3 free: 16061 MB
    node 4 cpus: 4 36
    node 4 size: 16127 MB
    node 4 free: 16107 MB
    node 5 cpus: 5 37
    node 5 size: 16127 MB
    node 5 free: 16109 MB
    node 6 cpus: 6 38
    node 6 size: 16127 MB
    node 6 free: 16112 MB
    node 7 cpus: 7 39
    node 7 size: 16126 MB
    node 7 free: 16085 MB
    node 8 cpus: 8 40
    node 8 size: 16127 MB
    node 8 free: 16109 MB
    node 9 cpus: 9 41
    node 9 size: 16127 MB
    node 9 free: 16113 MB
    node 10 cpus: 10 42
    node 10 size: 16127 MB
    node 10 free: 16106 MB
    node 11 cpus: 11 43
    node 11 size: 16126 MB
    node 11 free: 16112 MB
    node 12 cpus: 12 44
```

(Continued on next page)

Platform Notes (Continued)

```
node 12 size: 16127 MB
node 12 free: 16107 MB
node 13 cpus: 13 45
node 13 size: 16127 MB
node 13 free: 16093 MB
node 14 cpus: 14 46
node 14 size: 16127 MB
node 14 free: 16043 MB
node 15 cpus: 15 47
node 15 size: 16114 MB
node 15 free: 16083 MB
node 16 cpus: 16 48
node 16 size: 16127 MB
node 16 free: 16111 MB
node 17 cpus: 17 49
node 17 size: 16127 MB
node 17 free: 16112 MB
node 18 cpus: 18 50
node 18 size: 16127 MB
node 18 free: 16113 MB
node 19 cpus: 19 51
node 19 size: 16126 MB
node 19 free: 16111 MB
node 20 cpus: 20 52
node 20 size: 16127 MB
node 20 free: 16105 MB
node 21 cpus: 21 53
node 21 size: 16127 MB
node 21 free: 16110 MB
node 22 cpus: 22 54
node 22 size: 16127 MB
node 22 free: 16111 MB
node 23 cpus: 23 55
node 23 size: 16126 MB
node 23 free: 16111 MB
node 24 cpus: 24 56
node 24 size: 16127 MB
node 24 free: 16109 MB
node 25 cpus: 25 57
node 25 size: 16127 MB
node 25 free: 16109 MB
node 26 cpus: 26 58
node 26 size: 16127 MB
node 26 free: 16108 MB
node 27 cpus: 27 59
node 27 size: 16126 MB
node 27 free: 16107 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 28 cpus: 28 60
node 28 size: 16127 MB
node 28 free: 16112 MB
node 29 cpus: 29 61
node 29 size: 16098 MB
node 29 free: 16075 MB
node 30 cpus: 30 62
node 30 size: 16127 MB
node 30 free: 16111 MB
node 31 cpus: 31 63
node 31 size: 16125 MB
node 31 free: 16107 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19
20  21  22  23  24  25  26  27  28  29  30  31
  0:  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  1:  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  2:  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  3:  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  4:  12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  5:  12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  6:  12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  7:  12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  8:  12  12  12  12  12  12  12  12  10  11  11  11  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
  9:  12  12  12  12  12  12  12  12  11  10  11  11  12  12  12  12  32  32  32  32
  32  32  32  32  32  32  32  32  32  32  32  32
 10:  12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12  32  32  32  32
 32  32  32  32  32  32  32  32  32  32  32  32
 11:  12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12  32  32  32  32
 32  32  32  32  32  32  32  32  32  32  32  32
 12:  12  12  12  12  12  12  12  12  12  12  12  12  10  11  11  11  32  32  32  32
 32  32  32  32  32  32  32  32  32  32  32  32
 13:  12  12  12  12  12  12  12  12  12  12  12  12  11  10  11  11  32  32  32  32
 32  32  32  32  32  32  32  32  32  32  32  32
 14:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  10  11  32  32  32  32
 32  32  32  32  32  32  32  32  32  32  32  32
 15:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  11  10  32  32  32  32
 32  32  32  32  32  32  32  32  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
    16:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11
    12  12  12  12  12  12  12  12  12  12  12  12
    17:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11
    12  12  12  12  12  12  12  12  12  12  12  12
    18:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11
    12  12  12  12  12  12  12  12  12  12  12  12
    19:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10
    12  12  12  12  12  12  12  12  12  12  12  12
    20:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    10  11  11  11  12  12  12  12  12  12  12  12
    21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    11  10  11  11  12  12  12  12  12  12  12  12
    22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    11  11  10  11  12  12  12  12  12  12  12  12
    23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    11  11  11  10  12  12  12  12  12  12  12  12
    24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    12  12  12  12  10  11  11  11  12  12  12  12
    25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    12  12  12  12  11  10  11  11  12  12  12  12
    26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    12  12  12  12  11  11  10  11  12  12  12  12
    27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    12  12  12  12  11  11  11  10  12  12  12  12
    28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    12  12  12  12  12  12  12  12  10  11  11  11
    29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    12  12  12  12  12  12  12  12  11  10  11  11
    30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    12  12  12  12  12  12  12  12  11  11  10  11
    31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
    12  12  12  12  12  12  12  12  11  11  11  10

  From /proc/meminfo
     MemTotal:       527952040 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15-SP1"
        VERSION_ID="15.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
```

(Continued on next page)

Platform Notes (Continued)

```
      CPE_NAME="cpe:/o:suse:sles:15:sp1"

 uname -a:
    Linux suse15-sp1 4.12.14-197.7-default #1 SMP Mon Jun 24 08:33:54 UTC 2019 (650fd32)
    x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-3620 (L1 Terminal Fault):        Not affected
 Microarchitectural Data Sampling:         Not affected
 CVE-2017-5754 (Meltdown):                 Not affected
 CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                           via prctl and seccomp
 CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
 CVE-2017-5715 (Spectre variant 2):        Mitigation: Full AMD retpoline, IBPB:
                                          conditional, IBRS_FW, STIBP: conditional, RSB
                                           filling

 run-level 3 Nov 26 14:00

 SPEC is set to: /root/cpu2017-1.1.0
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda2      xfs   444G   13G  432G   3% /

 From /sys/devices/virtual/dmi/id
     BIOS:    Dell Inc. 1.2.4 12/03/2019
     Vendor:  Dell Inc.
     Product: PowerEdge C6525
     Product Family: PowerEdge

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

Fortran benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using both Fortran and C:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using Fortran, C, and C++:
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec
-lamdlibm -ljemalloc -lflang

Base Other Flags

C benchmarks:
`-Wno-return-type -DUSE_OPENMP`

Fortran benchmarks:
`-DUSE_OPENMP -Wno-return-type`

Benchmarks using both Fortran and C:
`-DUSE_OPENMP -Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -DUSE_OPENMP`

Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `-flto -Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-region-vectorize`
`-Wl,-mllvm -Wl,-vector-library=LIBMVEC`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`

(Continued on next page)

Peak Optimization Flags (Continued)

638.imagick_s (continued):
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec
-lamdlibm -ljemalloc -lflang

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)

Peak Optimization Flags (Continued)

607.cactuBSSN_s: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-Wno-return-type -DUSE_OPENMP`

Fortran benchmarks:
`-DUSE_OPENMP -Wno-return-type`

Benchmarks using both Fortran and C:
`-DUSE_OPENMP -Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -DUSE_OPENMP`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2098-01-02 06:21:58-0500.
Report generated on 2020-04-14 14:10:23 by CPU2017 PS formatter v6255.
Originally published on 2020-04-14.