SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2023US-TR4
(H11DSU-iN , AMD EPYC 7402)

SPECrate®2017_int_base = 354

SPECrate®2017_int_peak = 374

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

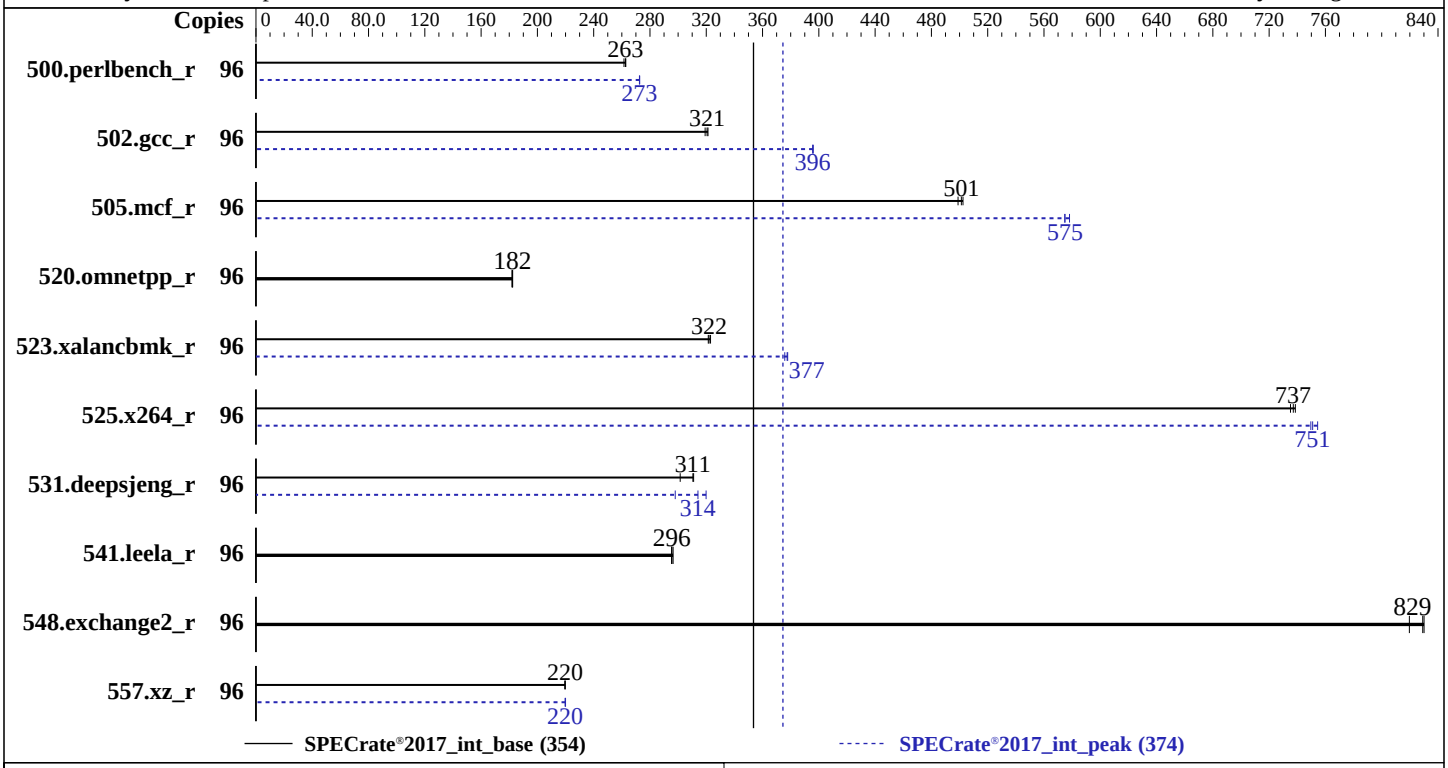

Hardware

CPU Name:	AMD EPYC 7402
Max MHz:	3350
Nominal:	2800
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	128 MB I+D on chip per chip, 16 MB shared / 3 cores
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)
Storage:	1 x 200 GB SATAT III SSD
Other:	None

Software

OS:	Ubuntu 19.04 kernel 5.0.0-25-generic
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	No
Firmware:	Version 2.1 released Feb-2020
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.2.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2023US-TR4
(H11DSU-iN , AMD EPYC 7402)

SPECrate®2017_int_base = 354

SPECrate®2017_int_peak = 374

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: May-2020
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	**582**	**263**	582	263	584	262	96	**561**	**273**	561	273	560	273
502.gcc_r	96	426	319	**424**	**321**	423	321	96	**343**	**396**	343	396	343	396
505.mcf_r	96	**309**	**501**	309	502	311	499	96	270	575	**270**	**575**	268	578
520.omnetpp_r	96	690	182	692	182	**691**	**182**	96	690	182	692	182	**691**	**182**
523.xalancbmk_r	96	**315**	**322**	314	323	315	321	96	270	376	**269**	**377**	268	378
525.x264_r	96	228	739	**228**	**737**	229	735	96	224	750	**224**	**751**	223	754
531.deepsjeng_r	96	354	311	365	301	**354**	**311**	96	369	298	344	320	**350**	**314**
541.leela_r	96	538	295	**538**	**296**	536	296	96	538	295	**538**	**296**	536	296
548.exchange2_r	96	303	830	307	820	**303**	**829**	96	303	830	307	820	**303**	**829**
557.xz_r	96	**472**	**220**	472	220	472	220	96	472	220	**472**	**220**	471	220

SPECrate®2017_int_base = 354

SPECrate®2017_int_peak = 374

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).
```

(Continued on next page)

Operating System Notes (Continued)

```
Transparent huge pages set to 'always' for this run (OS default)
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_rate_aocc200_rome_C_lib/64;/home/cpu2017/amd_rate_aoc
     c200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2
```

Platform Notes

```
BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 200
Package Power Limit Control = Manual
Package Power Limit = 200
APBDIS = 1
NUMA Nodes Per Socket = NPS4

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on h11dsu-01 Thu May 14 11:21:09 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
```

(Continued on next page)

Platform Notes (Continued)

```
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

  From /proc/cpuinfo
     model name : AMD EPYC 7402 24-Core Processor
        2  "physical id"s (chips)
        96 "processors"
     cores, siblings (Caution: counting these is hw and system dependent. The following
     excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
        cpu cores : 24
        siblings  : 48
        physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
        physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

  From lscpu:
       Architecture:        x86_64
       CPU op-mode(s):      32-bit, 64-bit
       Byte Order:          Little Endian
       Address sizes:       43 bits physical, 48 bits virtual
       CPU(s):              96
       On-line CPU(s) list: 0-95
       Thread(s) per core:  2
       Core(s) per socket:  24
       Socket(s):           2
       NUMA node(s):        8
       Vendor ID:           AuthenticAMD
       CPU family:          23
       Model:               49
       Model name:          AMD EPYC 7402 24-Core Processor
       Stepping:            0
       CPU MHz:             1800.091
       CPU max MHz:         2800.0000
       CPU min MHz:         1500.0000
       BogoMIPS:            5600.44
       Virtualization:      AMD-V
       L1d cache:           32K
       L1i cache:           32K
       L2 cache:            512K
       L3 cache:            16384K
       NUMA node0 CPU(s):   0-5,48-53
       NUMA node1 CPU(s):   6-11,54-59
       NUMA node2 CPU(s):   12-17,60-65
       NUMA node3 CPU(s):   18-23,66-71
       NUMA node4 CPU(s):   24-29,72-77
       NUMA node5 CPU(s):   30-35,78-83
       NUMA node6 CPU(s):   36-41,84-89
       NUMA node7 CPU(s):   42-47,90-95
       Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
```

(Continued on next page)

Platform Notes (Continued)

```
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
      osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2
      smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
      xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
      wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
      decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
      overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
    node 0 size: 257908 MB
    node 0 free: 257574 MB
    node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
    node 1 size: 258044 MB
    node 1 free: 257747 MB
    node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
    node 2 size: 258044 MB
    node 2 free: 257696 MB
    node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
    node 3 size: 258032 MB
    node 3 free: 257699 MB
    node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
    node 4 size: 258044 MB
    node 4 free: 257754 MB
    node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
    node 5 size: 258044 MB
    node 5 free: 257772 MB
    node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
    node 6 size: 258020 MB
    node 6 free: 257774 MB
    node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
    node 7 size: 258043 MB
    node 7 free: 257754 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  12  12  12  32  32  32  32
      1:  12  10  12  12  32  32  32  32
      2:  12  12  10  12  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
     3:  12  12  12  10  32  32  32  32
     4:  32  32  32  32  10  12  12  12
     5:  32  32  32  32  12  10  12  12
     6:  32  32  32  32  12  12  10  12
     7:  32  32  32  32  12  12  12  10

  From /proc/meminfo
     MemTotal:       2113722356 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Ubuntu 19.04

  From /etc/*release* /etc/*version*
     debian_version: buster/sid
     os-release:
        NAME="Ubuntu"
        VERSION="19.04 (Disco Dingo)"
        ID=ubuntu
        ID_LIKE=debian
        PRETTY_NAME="Ubuntu 19.04"
        VERSION_ID="19.04"
        HOME_URL="https://www.ubuntu.com/"
        SUPPORT_URL="https://help.ubuntu.com/"

  uname -a:
     Linux h11dsu-01 5.0.0-25-generic #26-Ubuntu SMP Thu Aug 1 12:04:58 UTC 2019 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-3620 (L1 Terminal Fault):        Not affected
  Microarchitectural Data Sampling:         Not affected
  CVE-2017-5754 (Meltdown):                 Not affected
  CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                             via prctl and seccomp
  CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs barriers and __user
                                             pointer sanitization
  CVE-2017-5715 (Spectre variant 2):        Mitigation: Full AMD retpoline, IBPB:
                                            conditional, IBRS_FW, STIBP: conditional, RSB
                                             filling

  run-level 3 May 14 11:13

  SPEC is set to: /home/cpu2017
     Filesystem     Type  Size  Used Avail Use% Mounted on
```

(Continued on next page)

Platform Notes (Continued)

```
    /dev/sda2       ext4  183G   33G  141G  20% /

 From /sys/devices/virtual/dmi/id
     BIOS:    American Megatrends Inc. 2.1 02/21/2020
     Vendor:  Supermicro
     Product: Super Server
     Serial:  0123456789

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     32x SK Hynix HMAA8GR7AJR4N-WM 64 kB 2 rank 2933

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:
```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:
```
clang
```

C++ benchmarks:
```
clang++
```

Fortran benchmarks:
```
flang
```

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

505.mcf_r: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively -mllvm -function-specialize -mllvm -enable-gvn-hoist -mllvm -unroll-threshold=50 -fremap-arrays -mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp -mllvm -inline-threshold=1000 -flv-function-specialization -lmvec -lamdlibm -ljemalloc -lflang`

525.x264_r: `Same as 500.perlbench_r`

557.xz_r: `Same as 505.mcf_r`

C++ benchmarks:

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `-m32 -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -flv-function-specialization -mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000 -ljemalloc`

531.deepsjeng_r: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -flv-function-specialization -mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc -lflang`

(Continued on next page)

Peak Optimization Flags (Continued)

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

Peak Other Flags

C benchmarks:

502.gcc_r: `-L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32`

C++ benchmarks:

523.xalancbmk_r: `-L/sppo/dev/cpu2017/v110/amd_rate_aocc200_rome_C_lib/32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc200-flags-C4.html`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc200-flags-C4.xml`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revB.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-14 07:21:08-0400.
Report generated on 2020-06-23 18:09:12 by CPU2017 PS formatter v6255.
Originally published on 2020-06-23.