SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa

eterio 217 RZ1 (AMD Epyc 7302, 3.0GHz)
AMD EPYC 7302

SPECspeed®2017_int_base = 8.74

SPECspeed®2017_int_peak = 9.02

CPU2017 License: 9081
Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa
Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020
Hardware Availability: Aug-2019
Software Availability: Sep-2020

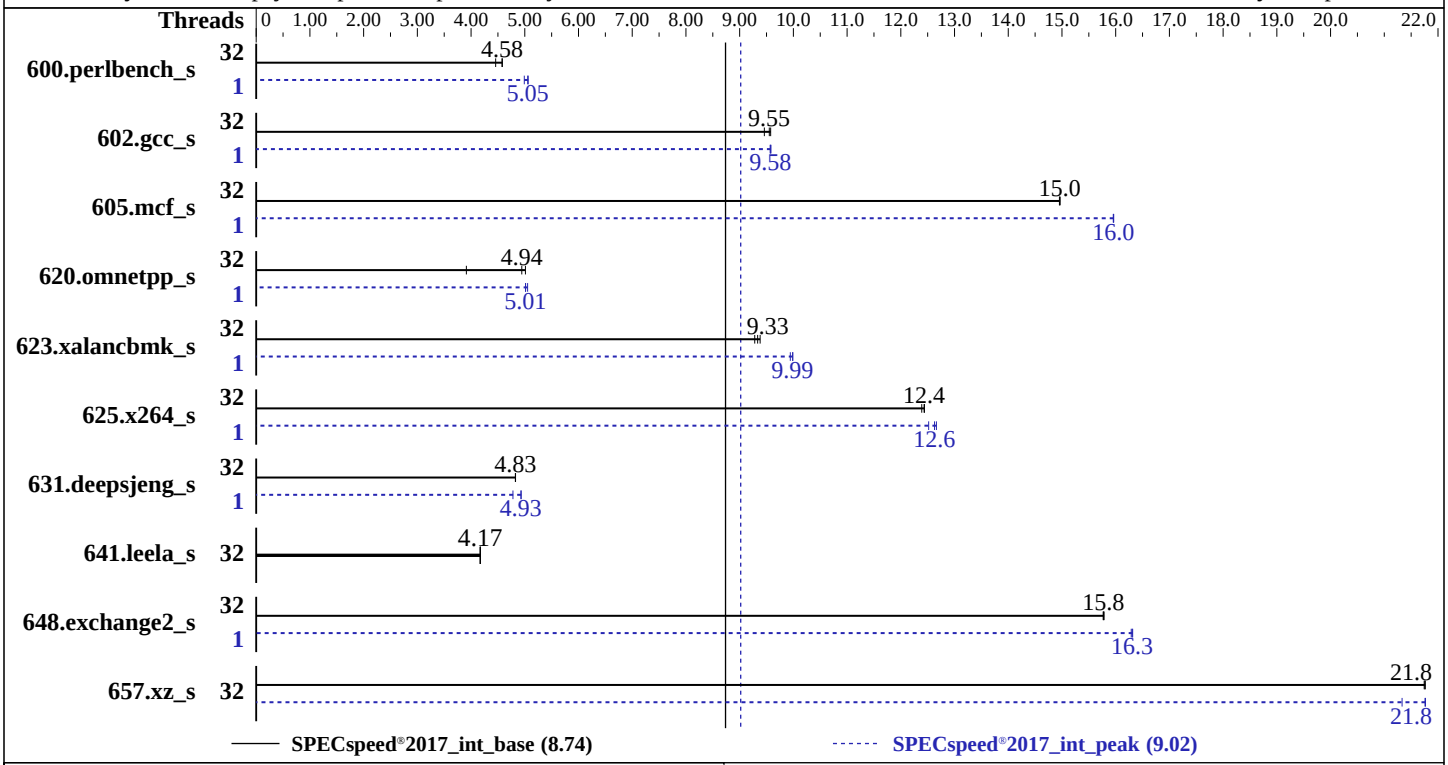

Hardware

CPU Name:	AMD EPYC 7302
Max MHz:	3300
Nominal:	3000
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	128 MB I+D on chip per chip, 16 MB shared / 2 cores
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200V-L)
Storage:	1 x 960 GB SSD SATA III
Other:	None

Software

OS:	CentOS Linux 8.2 kernel version 4.18.0-193.19.1.el8_2.x86_64
Compiler:	C/C++/Fortran: Version 2.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 3003 released Jul-2020
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa

eterio 217 RZ1 (AMD Epyc 7302, 3.0GHz)
AMD EPYC 7302

SPECspeed®2017_int_base = 8.74

SPECspeed®2017_int_peak = 9.02

CPU2017 License: 9081
Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa
Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Test Date: Oct-2020
Hardware Availability: Aug-2019
Software Availability: Sep-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	**388**	**4.58**	387	4.58	398	4.46	1	351	5.06	**351**	**5.05**	356	4.99
602.gcc_s	32	421	9.46	416	9.58	**417**	**9.55**	1	416	9.57	416	9.58	**416**	**9.58**
605.mcf_s	32	316	15.0	**316**	**15.0**	315	15.0	1	296	16.0	**296**	**16.0**	296	16.0
620.omnetpp_s	32	**330**	**4.94**	325	5.01	417	3.91	1	323	5.05	**325**	**5.01**	325	5.01
623.xalancbmk_s	32	151	9.38	153	9.28	**152**	**9.33**	1	**142**	**9.99**	143	9.94	142	9.99
625.x264_s	32	**142**	**12.4**	142	12.4	142	12.4	1	139	12.7	141	12.5	**140**	**12.6**
631.deepsjeng_s	32	297	4.83	**297**	**4.83**	297	4.83	1	**291**	**4.93**	291	4.93	300	4.78
641.leela_s	32	409	4.17	**409**	**4.17**	409	4.17	32	409	4.17	**409**	**4.17**	409	4.17
648.exchange2_s	32	186	15.8	**186**	**15.8**	186	15.8	1	**180**	**16.3**	180	16.3	180	16.3
657.xz_s	32	284	21.7	284	21.8	**284**	**21.8**	32	290	21.3	284	21.8	**284**	**21.8**

SPECspeed®2017_int_base = 8.74

SPECspeed®2017_int_peak = 9.02

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
     "/home/CPU2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/home/CPU2017-1.1.0
     /amd_speed_aocc200_rome_C_lib/32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"
OMP_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-31"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
BIOS settings:
Power phase shedding = Disabled
SVM Mode = Disabled
SR-IOV support = Disabled
DRAM Scrub time = Disabled
NUMA nodes per socket = NPS4
Determinism Slider = Power

 Sysinfo program /home/CPU2017-1.1.0/bin/sysinfo
 Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
 running on Zyxel Wed Oct 21 03:33:10 2020

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7302 16-Core Processor
       2  "physical id"s (chips)
       64 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 16
       siblings  : 32
       physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
       physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

 From lscpu:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              64
      On-line CPU(s) list: 0-63
      Thread(s) per core:  2
```

(Continued on next page)

Platform Notes (Continued)

```
      Core(s) per socket:  16
      Socket(s):           2
      NUMA node(s):        8
      Vendor ID:           AuthenticAMD
      CPU family:          23
      Model:               49
      Model name:          AMD EPYC 7302 16-Core Processor
      Stepping:            0
      CPU MHz:             2167.550
      CPU max MHz:         3000.0000
      CPU min MHz:         1500.0000
      BogoMIPS:            6000.35
      Virtualization:      AMD-V
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            16384K
      NUMA node0 CPU(s):   0-3,32-35
      NUMA node1 CPU(s):   4-7,36-39
      NUMA node2 CPU(s):   8-11,40-43
      NUMA node3 CPU(s):   12-15,44-47
      NUMA node4 CPU(s):   16-19,48-51
      NUMA node5 CPU(s):   20-23,52-55
      NUMA node6 CPU(s):   24-27,56-59
      NUMA node7 CPU(s):   28-31,60-63
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
      cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
      skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
      cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
      bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
      arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
      pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
      smca

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 32 33 34 35
    node 0 size: 64063 MB
    node 0 free: 63853 MB
```


(Continued on next page)

Platform Notes (Continued)

```
   node 1 cpus: 4 5 6 7 36 37 38 39
   node 1 size: 64481 MB
   node 1 free: 64070 MB
   node 2 cpus: 8 9 10 11 40 41 42 43
   node 2 size: 64508 MB
   node 2 free: 64376 MB
   node 3 cpus: 12 13 14 15 44 45 46 47
   node 3 size: 64496 MB
   node 3 free: 64393 MB
   node 4 cpus: 16 17 18 19 48 49 50 51
   node 4 size: 64508 MB
   node 4 free: 64425 MB
   node 5 cpus: 20 21 22 23 52 53 54 55
   node 5 size: 64508 MB
   node 5 free: 64411 MB
   node 6 cpus: 24 25 26 27 56 57 58 59
   node 6 size: 64508 MB
   node 6 free: 64407 MB
   node 7 cpus: 28 29 30 31 60 61 62 63
   node 7 size: 64509 MB
   node 7 free: 64411 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  32  32  32  32
     1:  12  10  12  12  32  32  32  32
     2:  12  12  10  12  32  32  32  32
     3:  12  12  12  10  32  32  32  32
     4:  32  32  32  32  10  12  12  12
     5:  32  32  32  32  12  10  12  12
     6:  32  32  32  32  12  12  10  12
     7:  32  32  32  32  12  12  12  10

 From /proc/meminfo
    MemTotal:       527961036 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    centos-release: CentOS Linux release 8.2.2004 (Core)
    centos-release-upstream: Derived from Red Hat Enterprise Linux 8.2 (Source)
    os-release:
       NAME="CentOS Linux"
       VERSION="8 (Core)"
       ID="centos"
       ID_LIKE="rhel fedora"
       VERSION_ID="8"
       PLATFORM_ID="platform:el8"
```


(Continued on next page)

Platform Notes (Continued)

```
      PRETTY_NAME="CentOS Linux 8 (Core)"
      ANSI_COLOR="0;31"
   redhat-release: CentOS Linux release 8.2.2004 (Core)
   system-release: CentOS Linux release 8.2.2004 (Core)
   system-release-cpe: cpe:/o:centos:centos:8

uname -a:
   Linux Zyxel 4.18.0-193.19.1.el8_2.x86_64 #1 SMP Mon Sep 14 14:37:00 UTC 2020 x86_64
   x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:                           Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:        Not affected
CVE-2017-5754 (Meltdown):                Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                          via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs barriers and __user
                                          pointer sanitization
CVE-2017-5715 (Spectre variant 2):       Mitigation: Full AMD retpoline, IBPB:
                                         conditional, IBRS_FW, STIBP: conditional, RSB
                                          filling
srbds:                                   Not affected
tsx_async_abort:                         Not affected

run-level 3 Oct 21 03:23

SPEC is set to: /home/CPU2017-1.1.0
   Filesystem                Type  Size  Used Avail Use% Mounted on
   /dev/mapper/cl_zyxel-home xfs   839G  9.7G  829G   2% /home

From /sys/devices/virtual/dmi/id
    BIOS:    American Megatrends Inc. 3003 07/10/2020
    Vendor:  ASUSTeK COMPUTER INC.
    Product: KNPP-D32-R Series
    Product Family: Server
    Serial:  System Serial Number

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x Micron Technology 36ASF4G72PZ-3G2E2 32 kB 2 rank 3200
    16x Unknown Unknown
```

(Continued on next page)

Platform Notes (Continued)

```
 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
        | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 623.xalancbmk_s(peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

C++ benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang

Fortran benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

Base Other Flags

C benchmarks:
-Wno-return-type

(Continued on next page)

Base Other Flags (Continued)

C++ benchmarks:
`-Wno-return-type`

Fortran benchmarks:
`-Wno-return-type`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Peak Portability Flags

600.perlbench_s: `-DSPEC_LINUX_X64 -DSPEC_LP64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LINUX -D_FILE_OFFSET_BITS=64`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

600.perlbench_s: `-flto -Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-region-vectorize`
`-Wl,-mllvm -Wl,-vector-library=LIBMVEC`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`

(Continued on next page)

Peak Optimization Flags (Continued)

600.perlbench_s (continued):
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang

602.gcc_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP
-fopenmp -fgnu89-inline -fopenmp=libomp -lomp -lpthread
-ldl -ljemalloc

605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang

625.x264_s: Same as 600.perlbench_s

(Continued on next page)

Peak Optimization Flags (Continued)

657.xz_s: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively -mllvm -function-specialize -mllvm -enable-gvn-hoist -mllvm -unroll-threshold=50 -fremap-arrays -mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp -mllvm -inline-threshold=1000 -flv-function-specialization -DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang`

C++ benchmarks:

620.omnetpp_s: `-flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -flv-function-specialization -mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang`

623.xalancbmk_s: `-m32 -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2 -flv-function-specialization -mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -ljemalloc`

631.deepsjeng_s: `Same as 620.omnetpp_s`

641.leela_s: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-return-type

C++ benchmarks (except as noted below):
-Wno-return-type

623.xalancbmk_s: -Wno-return-type
-L/sppo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32

Fortran benchmarks:
-Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc200-flags-C4.html
http://www.spec.org/cpu2017/flags/Epsylon_platform_amd_RZ1_rome.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc200-flags-C4.xml
http://www.spec.org/cpu2017/flags/Epsylon_platform_amd_RZ1_rome.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-10-21 03:33:09-0400.
Report generated on 2020-11-10 15:20:43 by CPU2017 PS formatter v6255.
Originally published on 2020-11-10.