SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R283-Z90-AAD1-000
(AMD EPYC 9654, 2.4GHz)

SPECrate®2017_fp_base = 1350

SPECrate®2017_fp_peak = 1470

CPU2017 License: 9082
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Dec-2022
Hardware Availability: Nov-2022
Software Availability: Dec-2022

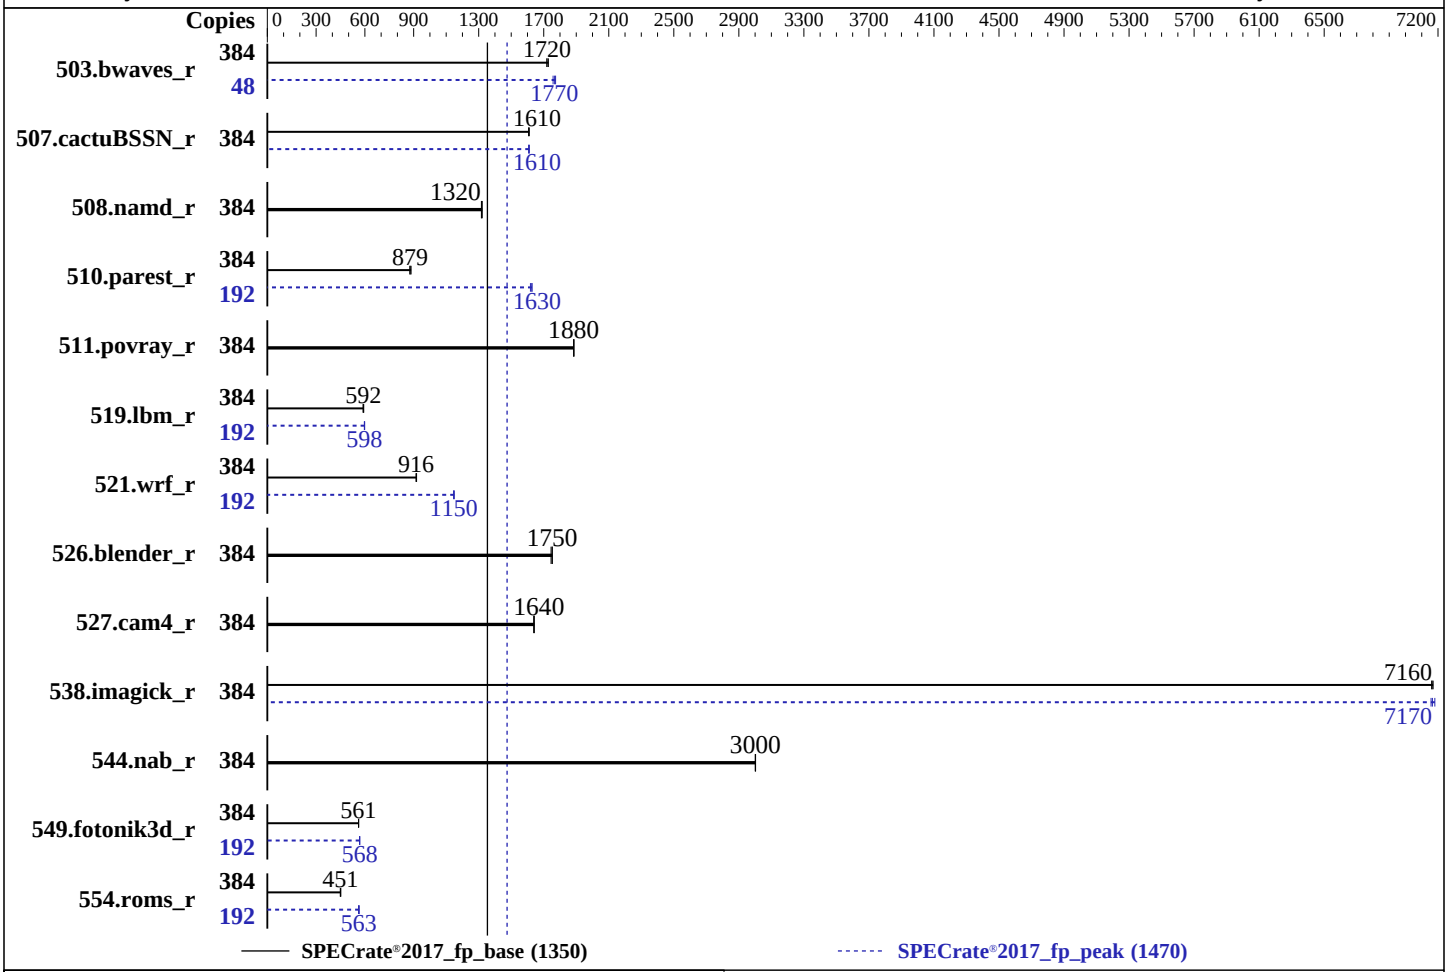

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 3.2 TB PCIE NVME SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 (x86_64) 5.14.21-150400.22-default
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	Version F04 released Dec-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	2240	1720	2228	1730	**2238**	**1720**	48	274	1760	**272**	**1770**	272	1770
507.cactuBSSN_r	384	302	1610	**302**	**1610**	302	1610	384	302	1610	302	1610	**302**	**1610**
508.namd_r	384	277	1320	276	1320	**277**	**1320**	384	277	1320	276	1320	**277**	**1320**
510.parest_r	384	**1143**	**879**	1147	876	1136	884	192	**309**	**1630**	310	1620	309	1630
511.povray_r	384	476	1880	476	1880	**476**	**1880**	384	476	1880	476	1880	**476**	**1880**
519.lbm_r	384	688	588	**683**	**592**	683	592	192	**338**	**598**	338	598	339	597
521.wrf_r	384	**939**	**916**	940	915	937	918	192	**375**	**1150**	374	1150	375	1150
526.blender_r	384	334	1750	335	1750	**334**	**1750**	384	334	1750	335	1750	**334**	**1750**
527.cam4_r	384	409	1640	**410**	**1640**	410	1640	384	409	1640	**410**	**1640**	410	1640
538.imagick_r	384	**133**	**7160**	133	7160	133	7170	384	**133**	**7170**	133	7160	133	7180
544.nab_r	384	**215**	**3000**	215	3000	215	3000	384	**215**	**3000**	215	3000	215	3000
549.fotonik3d_r	384	**2667**	**561**	2668	561	2663	562	192	1317	568	1318	568	**1317**	**568**
554.roms_r	384	1360	449	1351	452	**1354**	**451**	192	540	565	544	561	**542**	**563**

SPECrate®2017_fp_base = 1350

SPECrate®2017_fp_peak = 1470

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017_rB1/amd_rate_aocc400_genoa_B_lib/lib:/home/cpu2017_rB1/am
     d_rate_aocc400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS settings:
SEV Control = Disable
TSME = Disabled
Determinism Control = Manual
Determinism Enable = Power
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400

 Sysinfo program /home/cpu2017_rB1/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
```

(Continued on next page)

Platform Notes (Continued)

```
 running on localhost Tue Dec 13 23:36:54 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 9654 96-Core Processor
       2  "physical id"s (chips)
       384 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 96
       siblings  : 192
       physical 0: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
       26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
       54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
       82 83 84 85 86 87 88 89 90 91 92 93 94 95
       physical 1: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
       26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
       54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
       82 83 84 85 86 87 88 89 90 91 92 93 94 95

 From lscpu from util-linux 2.37.2:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Address sizes:                   52 bits physical, 57 bits virtual
      Byte Order:                      Little Endian
      CPU(s):                          384
      On-line CPU(s) list:             0-383
      Vendor ID:                       AuthenticAMD
      Model name:                      AMD EPYC 9654 96-Core Processor
      CPU family:                      25
      Model:                           17
      Thread(s) per core:              2
      Core(s) per socket:              96
      Socket(s):                       2
      Stepping:                        1
      Frequency boost:                 enabled
      CPU max MHz:                     3707.8120
      CPU min MHz:                     1500.0000
      BogoMIPS:                        4800.07
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
      aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
```

(Continued on next page)

Platform Notes (Continued)

```
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:                  AMD-V
L1d cache:                       6 MiB (192 instances)
L1i cache:                       6 MiB (192 instances)
L2 cache:                        192 MiB (192 instances)
L3 cache:                        768 MiB (24 instances)
NUMA node(s):                    24
NUMA node0 CPU(s):               0-7,192-199
NUMA node1 CPU(s):               8-15,200-207
NUMA node2 CPU(s):               16-23,208-215
NUMA node3 CPU(s):               24-31,216-223
NUMA node4 CPU(s):               32-39,224-231
NUMA node5 CPU(s):               40-47,232-239
NUMA node6 CPU(s):               48-55,240-247
NUMA node7 CPU(s):               56-63,248-255
NUMA node8 CPU(s):               64-71,256-263
NUMA node9 CPU(s):               72-79,264-271
NUMA node10 CPU(s):              80-87,272-279
NUMA node11 CPU(s):              88-95,280-287
NUMA node12 CPU(s):              96-103,288-295
NUMA node13 CPU(s):              104-111,296-303
NUMA node14 CPU(s):              112-119,304-311
NUMA node15 CPU(s):              120-127,312-319
NUMA node16 CPU(s):              128-135,320-327
NUMA node17 CPU(s):              136-143,328-335
NUMA node18 CPU(s):              144-151,336-343
NUMA node19 CPU(s):              152-159,344-351
NUMA node20 CPU(s):              160-167,352-359
NUMA node21 CPU(s):              168-175,360-367
NUMA node22 CPU(s):              176-183,368-375
NUMA node23 CPU(s):              184-191,376-383
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
```

(Continued on next page)

Platform Notes (Continued)

```
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW,
      STIBP always-on, RSB filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected

  From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K       6M    8 Data            1    64        1             64
      L1i       32K       6M    8 Instruction     1    64        1             64
      L2         1M     192M    8 Unified         2  2048        1             64
      L3        32M     768M   16 Unified         3 32768        1             64

  /proc/cpuinfo cache data
     cache size : 1024 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 24 nodes (0-23)
    node 0 cpus: 0 1 2 3 4 5 6 7 192 193 194 195 196 197 198 199
    node 0 size: 64176 MB
    node 0 free: 61526 MB
    node 1 cpus: 8 9 10 11 12 13 14 15 200 201 202 203 204 205 206 207
    node 1 size: 64506 MB
    node 1 free: 63875 MB
    node 2 cpus: 16 17 18 19 20 21 22 23 208 209 210 211 212 213 214 215
    node 2 size: 64506 MB
    node 2 free: 63870 MB
    node 3 cpus: 24 25 26 27 28 29 30 31 216 217 218 219 220 221 222 223
    node 3 size: 64506 MB
    node 3 free: 63838 MB
    node 4 cpus: 32 33 34 35 36 37 38 39 224 225 226 227 228 229 230 231
    node 4 size: 64506 MB
    node 4 free: 63884 MB
    node 5 cpus: 40 41 42 43 44 45 46 47 232 233 234 235 236 237 238 239
    node 5 size: 64506 MB
    node 5 free: 63875 MB
    node 6 cpus: 48 49 50 51 52 53 54 55 240 241 242 243 244 245 246 247
    node 6 size: 64506 MB
    node 6 free: 63777 MB
    node 7 cpus: 56 57 58 59 60 61 62 63 248 249 250 251 252 253 254 255
    node 7 size: 64506 MB
    node 7 free: 63868 MB
    node 8 cpus: 64 65 66 67 68 69 70 71 256 257 258 259 260 261 262 263
    node 8 size: 64506 MB
    node 8 free: 62675 MB
    node 9 cpus: 72 73 74 75 76 77 78 79 264 265 266 267 268 269 270 271
```

(Continued on next page)

Platform Notes (Continued)

```
node 9 size: 64506 MB
node 9 free: 63907 MB
node 10 cpus: 80 81 82 83 84 85 86 87 272 273 274 275 276 277 278 279
node 10 size: 64506 MB
node 10 free: 63892 MB
node 11 cpus: 88 89 90 91 92 93 94 95 280 281 282 283 284 285 286 287
node 11 size: 64506 MB
node 11 free: 63873 MB
node 12 cpus: 96 97 98 99 100 101 102 103 288 289 290 291 292 293 294 295
node 12 size: 64506 MB
node 12 free: 63892 MB
node 13 cpus: 104 105 106 107 108 109 110 111 296 297 298 299 300 301 302 303
node 13 size: 64506 MB
node 13 free: 63894 MB
node 14 cpus: 112 113 114 115 116 117 118 119 304 305 306 307 308 309 310 311
node 14 size: 64472 MB
node 14 free: 63852 MB
node 15 cpus: 120 121 122 123 124 125 126 127 312 313 314 315 316 317 318 319
node 15 size: 64506 MB
node 15 free: 63911 MB
node 16 cpus: 128 129 130 131 132 133 134 135 320 321 322 323 324 325 326 327
node 16 size: 64506 MB
node 16 free: 63902 MB
node 17 cpus: 136 137 138 139 140 141 142 143 328 329 330 331 332 333 334 335
node 17 size: 64506 MB
node 17 free: 63898 MB
node 18 cpus: 144 145 146 147 148 149 150 151 336 337 338 339 340 341 342 343
node 18 size: 64506 MB
node 18 free: 63891 MB
node 19 cpus: 152 153 154 155 156 157 158 159 344 345 346 347 348 349 350 351
node 19 size: 64506 MB
node 19 free: 63903 MB
node 20 cpus: 160 161 162 163 164 165 166 167 352 353 354 355 356 357 358 359
node 20 size: 64506 MB
node 20 free: 63903 MB
node 21 cpus: 168 169 170 171 172 173 174 175 360 361 362 363 364 365 366 367
node 21 size: 64506 MB
node 21 free: 63895 MB
node 22 cpus: 176 177 178 179 180 181 182 183 368 369 370 371 372 373 374 375
node 22 size: 64506 MB
node 22 free: 63901 MB
node 23 cpus: 184 185 186 187 188 189 190 191 376 377 378 379 380 381 382 383
node 23 size: 64018 MB
node 23 free: 63408 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19
20  21  22  23
```

(Continued on next page)

Platform Notes (Continued)

```
  0:  10  11  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  1:  11  10  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  2:  11  11  10  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  3:  12  12  12  10  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  4:  12  12  12  11  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  5:  12  12  12  11  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  6:  12  12  12  12  12  12  10  11  11  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  7:  12  12  12  12  12  12  11  10  11  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  8:  12  12  12  12  12  12  11  11  10  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  9:  12  12  12  12  12  12  12  12  12  10  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
 10:  12  12  12  12  12  12  12  12  12  12  11  10  11  32  32  32  32  32  32  32  32
 32  32  32  32
 11:  12  12  12  12  12  12  12  12  12  12  11  11  10  32  32  32  32  32  32  32  32
 32  32  32  32
 12:  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  12  12  12  12  12
 12  12  12  12
 13:  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  12  12  12  12  12
 12  12  12  12
 14:  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  12  12  12  12  12
 12  12  12  12
 15:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  10  11  11  12  12
 12  12  12  12
 16:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  10  11  12  12
 12  12  12  12
 17:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  11  10  12  12
 12  12  12  12
 18:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
 11  12  12  12
 19:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10
 11  12  12  12
 20:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  11
 10  12  12  12
 21:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12
 12  10  11  11
 22:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12
 12  11  10  11
 23:  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12
```


(Continued on next page)

Platform Notes (Continued)

```
   12  11  11  10

From /proc/meminfo
   MemTotal:       1584439916 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 15 SP4

From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP4"
      VERSION_ID="15.4"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp4"

uname -a:
   Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
   UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          Not affected
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                       Mitigation: Retpolines, IBPB:
                                                         conditional, IBRS_FW, STIBP:
                                                         always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

run-level 3 Dec 13 16:55
```

(Continued on next page)

Platform Notes (Continued)

```
 SPEC is set to: /home/cpu2017_rB1
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p3 xfs   237G   61G  176G  26% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         GIGABYTE
     Product:        R283-Z90-AAD1-000
     Product Family: Server
     Serial:         GMG6D1212A0002

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     24x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800

 BIOS:
    BIOS Vendor:       GIGABYTE
    BIOS Version:      F04
    BIOS Date:         12/01/2022
    BIOS Revision:     5.27

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

C++ benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Benchmarks using both C and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm`

(Continued on next page)

Peak Optimization Flags (Continued)

519.lbm_r (continued):
-lamdalloc

538.imagick_r: Same as 519.lbm_r

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

Fortran benchmarks:

503.bwaves_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang

549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining

(Continued on next page)

Peak Optimization Flags (Continued)

521.wrf_r (continued):
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -faggressive-loop-transform -fvector-transform
-fscalar-transform -Mrecursive -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

(Continued on next page)

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc400-flags.html`
`http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.1-Genoa.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc400-flags.xml`
`http://www.spec.org/cpu2017/flags/GIGA-BYTE-Platform-SPECcpu2017-Flags-V1.1-Genoa.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-13 10:36:53-0500.
Report generated on 2023-01-17 18:39:23 by CPU2017 PS formatter v6442.
Originally published on 2023-01-17.