SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Oct-2023
Hardware Availability: Nov-2023
Software Availability: Sep-2023

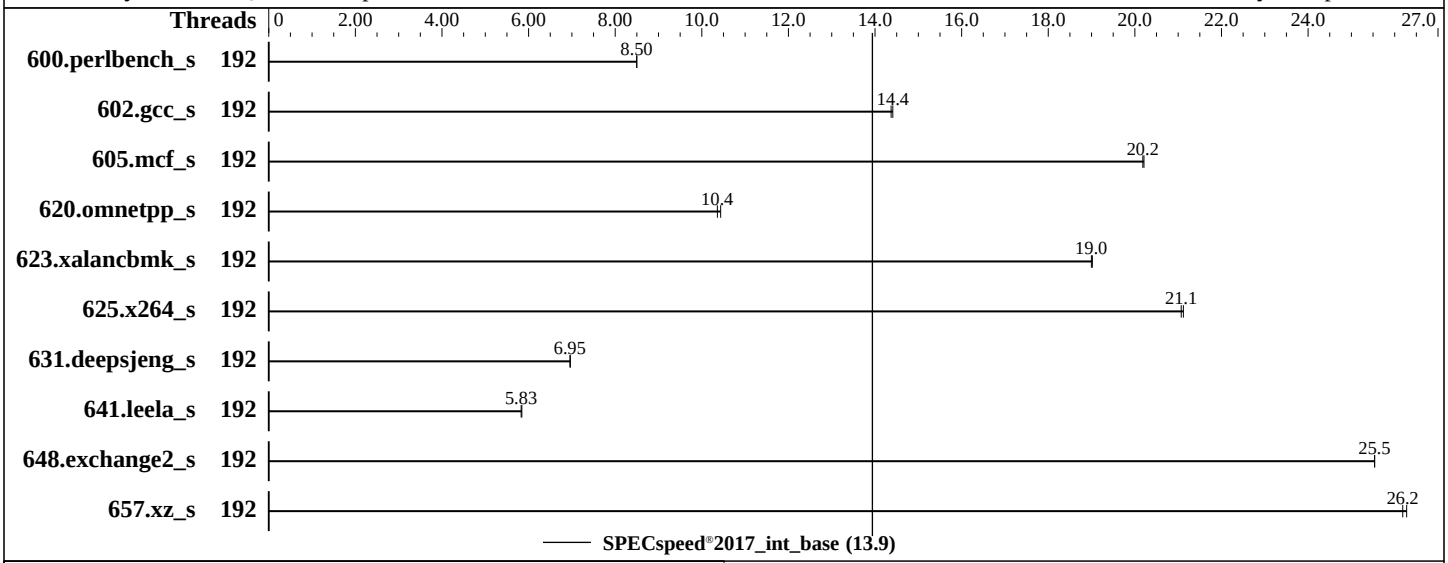

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	192 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 3.84 TB NVMe SSD
Other:	None

Software

OS:	Ubuntu 22.04.2 LTS kernel version 5.15.0-84-generic
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 3A02 released Sep-2023
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Oct-2023
Hardware Availability: Nov-2023
Software Availability: Sep-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	**209**	**8.50**	209	8.50									
602.gcc_s	192	**277**	**14.4**	276	14.4									
605.mcf_s	192	**234**	**20.2**	234	20.2									
620.omnetpp_s	192	**157**	**10.4**	156	10.4									
623.xalancbmk_s	192	74.5	19.0	**74.6**	**19.0**									
625.x264_s	192	**83.7**	**21.1**	83.5	21.1									
631.deepsjeng_s	192	206	6.97	**206**	**6.95**									
641.leela_s	192	292	5.84	**293**	**5.83**									
648.exchange2_s	192	115	25.5	**115**	**25.5**									
657.xz_s	192	**236**	**26.2**	235	26.3									

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-191"
LD_LIBRARY_PATH = "/root/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "192"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration
 ACPI CST C2 Latency set to 18
 NUMA nodes per socket set to NPS4
 Determinism Control is Manual
 Determinism Slider set to Power
 cTDP Control set to Manual
 cTDP set to 400
 PPT Control set to Manual
 PPT set to 400
 SMT set to disable

 Sysinfo program /root/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on quanta Thu Oct 12 10:21:56 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
```

(Continued on next page)

Platform Notes (Continued)

```
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux quanta 5.15.0-84-generic #93-Ubuntu SMP Tue Sep 5 17:16:10 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   10:21:56 up  1:14,  1 user,  load average: 3.51, 4.67, 2.92
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                17:07    1:11m  1.28s  0.04s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              6190491
  nofiles              1024000
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -f
 -bash
 /bin/bash ./test.sh
 python3 ./run_amd_speed_aocc400_znver4_A1.py
 /bin/bash ./amd_speed_aocc400_znver4_A1.sh
 runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune base --reportable --iterations 2 intspeed
 runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune base --reportable --iterations 2 --nopower
   --runmode speed --tune base --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9654 96-Core Processor
    vendor_id       : AuthenticAMD
```

(Continued on next page)

Platform Notes (Continued)

```
     cpu family      : 25
     model           : 17
     stepping        : 1
     microcode       : 0xa10113e
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
     TLB size        : 3584 4K pages
     cpu cores       : 96
     siblings        : 96
     2 physical ids (chips)
     192 processors (hardware threads)
     physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
     physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
     physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
     physical id 1: apicids
     256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
   Architecture:                        x86_64
   CPU op-mode(s):                      32-bit, 64-bit
   Address sizes:                       46 bits physical, 57 bits virtual
   Byte Order:                          Little Endian
   CPU(s):                              192
   On-line CPU(s) list:                 0-191
   Vendor ID:                           AuthenticAMD
   Model name:                          AMD EPYC 9654 96-Core Processor
   CPU family:                          25
   Model:                               17
   Thread(s) per core:                  1
   Core(s) per socket:                  96
   Socket(s):                           2
   Stepping:                            1
   Frequency boost:                     enabled
   CPU max MHz:                         3707.8120
   CPU min MHz:                         1500.0000
   BogoMIPS:                            4792.35
   Flags:                               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                                        lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                                        rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                                        movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                                        cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                                        topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                                        cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                                        fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                        rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                                        avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                        cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                                        wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                                        vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                                        v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                                        gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                                        rdpid overflow_recov succor smca fsrm flush_l1d sme sev sev_es
   Virtualization:                      AMD-V
   L1d cache:                           6 MiB (192 instances)
   L1i cache:                           6 MiB (192 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
  L2 cache:                        192 MiB (192 instances)
  L3 cache:                        768 MiB (24 instances)
  NUMA node(s):                    24
  NUMA node0 CPU(s):               0-7
  NUMA node1 CPU(s):               8-15
  NUMA node2 CPU(s):               16-23
  NUMA node3 CPU(s):               24-31
  NUMA node4 CPU(s):               32-39
  NUMA node5 CPU(s):               40-47
  NUMA node6 CPU(s):               48-55
  NUMA node7 CPU(s):               56-63
  NUMA node8 CPU(s):               64-71
  NUMA node9 CPU(s):               72-79
  NUMA node10 CPU(s):              80-87
  NUMA node11 CPU(s):              88-95
  NUMA node12 CPU(s):              96-103
  NUMA node13 CPU(s):              104-111
  NUMA node14 CPU(s):              112-119
  NUMA node15 CPU(s):              120-127
  NUMA node16 CPU(s):              128-135
  NUMA node17 CPU(s):              136-143
  NUMA node18 CPU(s):              144-151
  NUMA node19 CPU(s):              152-159
  NUMA node20 CPU(s):              160-167
  NUMA node21 CPU(s):              168-175
  NUMA node22 CPU(s):              176-183
  NUMA node23 CPU(s):              184-191
  Vulnerability Gather data sampling: Not affected
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                   filling, PBRSB-eIBRS Not affected
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       6M    8 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M    8 Unified         2  2048        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 24 nodes (0-23)
  node 0 cpus: 0-7
  node 0 size: 64110 MB
  node 0 free: 63767 MB
  node 1 cpus: 8-15
  node 1 size: 64509 MB
  node 1 free: 64118 MB
  node 2 cpus: 16-23
  node 2 size: 64509 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 2 free: 64096 MB
node 3 cpus: 24-31
node 3 size: 64509 MB
node 3 free: 64357 MB
node 4 cpus: 32-39
node 4 size: 64509 MB
node 4 free: 64316 MB
node 5 cpus: 40-47
node 5 size: 64509 MB
node 5 free: 64348 MB
node 6 cpus: 48-55
node 6 size: 64509 MB
node 6 free: 64350 MB
node 7 cpus: 56-63
node 7 size: 64509 MB
node 7 free: 64317 MB
node 8 cpus: 64-71
node 8 size: 64509 MB
node 8 free: 64321 MB
node 9 cpus: 72-79
node 9 size: 64509 MB
node 9 free: 63049 MB
node 10 cpus: 80-87
node 10 size: 64509 MB
node 10 free: 64191 MB
node 11 cpus: 88-95
node 11 size: 64509 MB
node 11 free: 63352 MB
node 12 cpus: 96-103
node 12 size: 64509 MB
node 12 free: 64281 MB
node 13 cpus: 104-111
node 13 size: 64509 MB
node 13 free: 64275 MB
node 14 cpus: 112-119
node 14 size: 64509 MB
node 14 free: 64262 MB
node 15 cpus: 120-127
node 15 size: 64509 MB
node 15 free: 64361 MB
node 16 cpus: 128-135
node 16 size: 64509 MB
node 16 free: 64345 MB
node 17 cpus: 136-143
node 17 size: 64509 MB
node 17 free: 64351 MB
node 18 cpus: 144-151
node 18 size: 64509 MB
node 18 free: 64359 MB
node 19 cpus: 152-159
node 19 size: 64509 MB
node 19 free: 64365 MB
node 20 cpus: 160-167
node 20 size: 64462 MB
node 20 free: 64295 MB
node 21 cpus: 168-175
node 21 size: 64509 MB
node 21 free: 64322 MB
node 22 cpus: 176-183
node 22 size: 64509 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 22 free: 64332 MB
  node 23 cpus: 184-191
  node 23 size: 64454 MB
  node 23 free: 64165 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23
    0:  10  11  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
    1:  11  10  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
    2:  11  11  10  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
    3:  12  12  12  10  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
    4:  12  12  12  11  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
    5:  12  12  12  11  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
    6:  12  12  12  12  12  12  10  11  11  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
    7:  12  12  12  12  12  12  11  10  11  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
    8:  12  12  12  12  12  12  11  11  10  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
    9:  12  12  12  12  12  12  12  12  12  10  11  11  32  32  32  32  32  32  32  32  32  32  32  32
   10:  12  12  12  12  12  12  12  12  12  11  10  11  32  32  32  32  32  32  32  32  32  32  32  32
   11:  12  12  12  12  12  12  12  12  12  11  11  10  32  32  32  32  32  32  32  32  32  32  32  32
   12:  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  12  12  12  12  12  12  12  12  12
   13:  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  12  12  12  12  12  12  12  12  12
   14:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  12  12  12  12  12  12  12  12  12
   15:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  10  11  11  12  12  12  12  12  12
   16:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  10  11  12  12  12  12  12  12
   17:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  11  10  12  12  12  12  12  12
   18:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11  11  12  12  12
   19:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10  11  12  12  12
   20:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  11  10  12  12  12
   21:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12  10  11  11
   22:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12  11  10  11
   23:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584881684 kB

------------------------------------------------------------
10. who -r
  run-level 5 Oct 12 17:07

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT             LOAD   ACTIVE SUB    DESCRIPTION
  * rc-local.service loaded failed failed /etc/rc.local Compatibility

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor blk-availability chrony cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common irqbalance keyboard-setup lm-sensors lvm2-monitor lxd-agent multipathd
                   networkd-dispatcher open-iscsi open-vm-tools pollinate rpcbind rsyslog secureboot-db
                   setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
                   thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
  enabled-runtime  netplan-ovs-cleanup rc-local systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell grub-initrd-fallback ipmievd iscsid nftables rsync serial-getty@
```

(Continued on next page)

Platform Notes (Continued)

```
                  sysstat systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                  systemd-time-wait-sync upower
  generated       apport cpufrequtils edac loadcpufreq openipmi
  indirect        uuidd
  masked          cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot nfs-common rc rcS
                  screen-cleanup sudo systemd-timesyncd x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.15.0-84-generic
  root=UUID=2aa35e7a-56f6-460a-ae69-64654070d9c7
  ro
  pcie_aspm=off

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2400MHz

------------------------------------------------------------
16. tuned-adm active
  Current active profile: latency-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio           3
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.2 LTS

------------------------------------------------------------
21. Disk information
SPEC is set to: /root/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme1n1p2 ext4  3.5T   44G  3.3T   2% /

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         Quanta Cloud Technology Inc.
    Product:        QuantaGrid D44N-1U
    Product Family: S6N

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    24x Micron Technology MTC36F2046S1PC48BA1 64 GB 2 rank 4800


------------------------------------------------------------
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      3A02
   BIOS Date:         09/21/2023
   BIOS Revision:     5.27
   Firmware Revision: 3.24
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran | 648.exchange2_s(base)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.html
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1.1_AMD_Genoa.html

You can also download the XML flags sources by saving the following links:

```
http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.xml
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1.1_AMD_Genoa.xml
```


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-12 06:21:55-0400.
Report generated on 2023-11-21 20:34:05 by CPU2017 PS formatter v6716.
Originally published on 2023-11-21.