



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120a
(Intel Xeon E5504)

SPECint®2006 = 21.3

SPECint_base2006 = 19.3

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

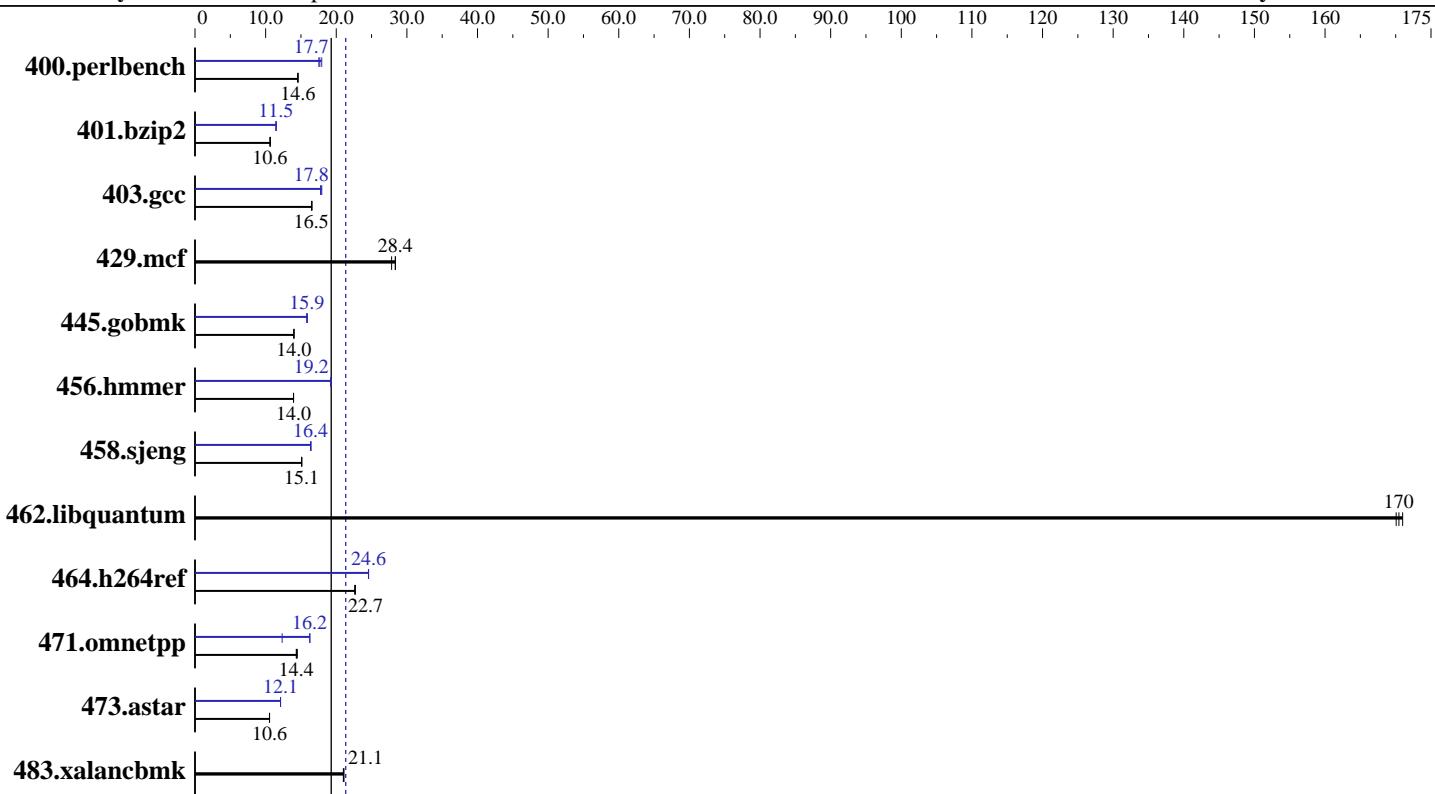

SPECint_base2006 = 19.3

SPECint®2006 = 21.3

Hardware

CPU Name:	Intel Xeon E5504
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 X 4 GB PC3-8500R running at 800 MHz)
Disk Subsystem:	1x160 GB SATA2, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
Compiler:	Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.081
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120a
(Intel Xeon E5504)

SPECint2006 = 21.3

SPECint_base2006 = 19.3

CPU2006 license: 9006

Test date: Jun-2009

Test sponsor: NEC Corporation

Hardware Availability: Apr-2009

Tested by: NEC Corporation

Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	672	14.5	670	14.6	670	14.6	544	17.9	553	17.7	557	17.5
401.bzip2	910	10.6	907	10.6	903	10.7	842	11.5	840	11.5	840	11.5
403.gcc	487	16.5	487	16.5	487	16.5	451	17.8	448	18.0	453	17.8
429.mcf	328	27.8	322	28.4	321	28.4	328	27.8	322	28.4	321	28.4
445.gobmk	749	14.0	749	14.0	750	14.0	660	15.9	663	15.8	661	15.9
456.hmmer	669	13.9	669	14.0	669	14.0	485	19.2	485	19.2	485	19.2
458.sjeng	801	15.1	801	15.1	801	15.1	738	16.4	738	16.4	738	16.4
462.libquantum	122	170	121	171	122	170	122	170	121	171	122	170
464.h264ref	978	22.6	975	22.7	976	22.7	901	24.6	900	24.6	901	24.6
471.omnetpp	431	14.5	436	14.4	435	14.4	506	12.3	385	16.2	384	16.3
473.astar	665	10.6	665	10.6	666	10.5	580	12.1	579	12.1	580	12.1
483.xalancbmk	327	21.1	328	21.1	329	21.0	327	21.1	328	21.1	329	21.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Platform Notes

BIOS setting:
NUMA configuration : Enabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120a
(Intel Xeon E5504)

SPECint2006 = 21.3

SPECint_base2006 = 19.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/opt/SmartHeap_8.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/Compiler/11.0/081/bin/intel64/icc
```

```
456.hmmr: /opt/intel/Compiler/11.0/081/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/081/bin/intel64/icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
473.astar: /opt/intel/Compiler/11.0/081/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmr: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120a
(Intel Xeon E5504)

SPECint2006 = 21.3

SPECint_base2006 = 19.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
          -opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
           -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
              -prof-use(pass 2) -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
            -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64

483.xalancbmk: basepeak = yes
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT120a
(Intel Xeon E5504)

SPECint2006 = 21.3

SPECint_base2006 = 19.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 02:32:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 July 2009.