



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55


Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

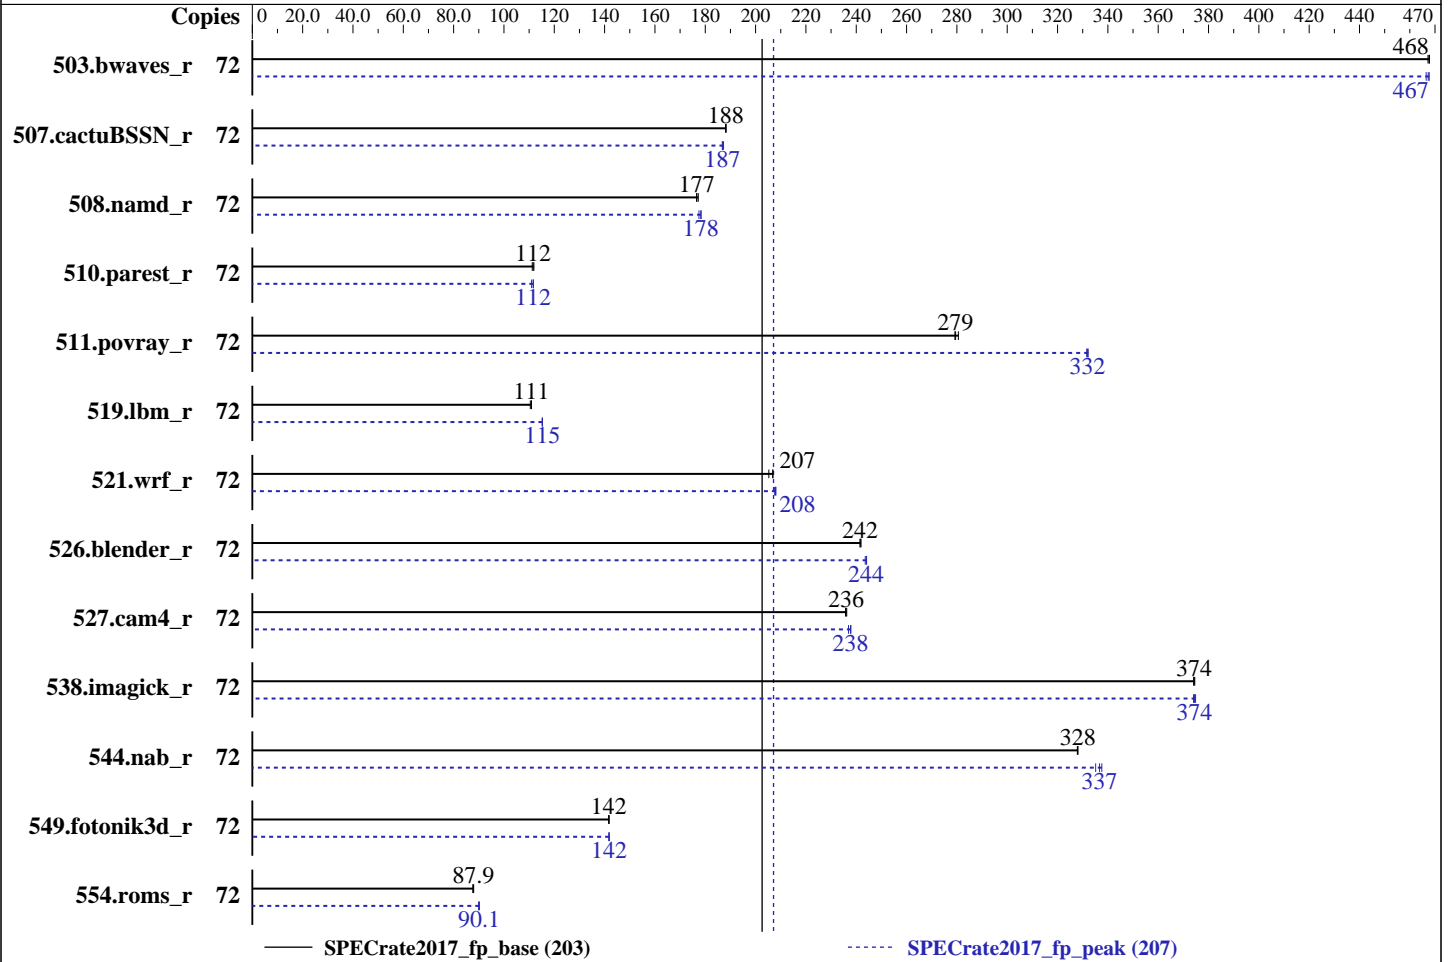

Hardware

CPU Name: Intel Xeon Gold 6154
 Max MHz.: 3700
 Nominal: 3000
 Enabled: 36 cores, 2 chips, 2 threads/core
 Orderable: 1-2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 460 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: version 1.1.7 released Oct-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	72	1544	468	1543	468	1545	467	72	1548	466	1545	467	1544	468
507.cactuBSSN_r	72	484	188	485	188	484	188	72	487	187	488	187	488	187
508.namd_r	72	387	177	386	177	387	177	72	384	178	385	177	384	178
510.parest_r	72	1688	112	1683	112	1693	111	72	1687	112	1697	111	1687	112
511.povray_r	72	599	281	602	279	602	279	72	507	332	506	332	506	332
519.lbm_r	72	684	111	684	111	687	110	72	658	115	659	115	658	115
521.wrf_r	72	780	207	786	205	779	207	72	775	208	777	208	776	208
526.blender_r	72	454	242	454	242	453	242	72	450	244	449	244	449	244
527.cam4_r	72	534	236	534	236	533	236	72	530	238	531	237	529	238
538.imagick_r	72	478	374	479	374	478	375	72	479	374	478	374	478	375
544.nab_r	72	369	328	369	328	370	328	72	360	337	359	338	362	335
549.fotonik3d_r	72	1979	142	1981	142	1981	142	72	1979	142	1980	142	1979	142
554.roms_r	72	1301	88.0	1302	87.9	1306	87.6	72	1268	90.2	1272	89.9	1269	90.1

SPECrate2017_fp_base = 203

SPECrate2017_fp_peak = 207

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/temi/cpu2017/lib/ia32:/home/temi/cpu2017/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/temi/cpu2017/je5.0.1-32:/home/temi/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/temi/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-bgfp Tue Nov 28 20:24:43 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz

2 "physical id"s (chips)

72 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 72

On-line CPU(s) list: 0-71

Thread(s) per core: 2

Core(s) per socket: 18

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz

Stepping: 4

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

```

CPU MHz:                2992.987
BogoMIPS:               5985.97
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              25344K
NUMA node0 CPU(s):    0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64, 68
NUMA node1 CPU(s):    1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 41, 45, 49, 53, 57, 61, 65, 69
NUMA node2 CPU(s):    2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58, 62, 66, 70
NUMA node3 CPU(s):    3, 7, 11, 15, 19, 23, 27, 31, 35, 39, 43, 47, 51, 55, 59, 63, 67, 71
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68
node 0 size: 95223 MB
node 0 free: 94809 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69
node 1 size: 96753 MB
node 1 free: 96359 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70
node 2 size: 96753 MB
node 2 free: 96389 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71
node 3 size: 96750 MB
node 3 free: 96388 MB
node distances:
node  0  1  2  3
 0:  10  21  11  21
 1:  21  10  21  11
 2:  11  21  10  21
 3:  21  11  21  10

```

From /proc/meminfo

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

MemTotal: 394732004 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
```

```
SUSE Linux Enterprise Server 12 (x86_64)
```

```
VERSION = 12
```

```
PATCHLEVEL = 2
```

```
# This file is deprecated and will be removed in a future service pack or release.
```

```
# Please check /etc/os-release for details about this release.
```

```
os-release:
```

```
NAME="SLES"
```

```
VERSION="12-SP2"
```

```
VERSION_ID="12.2"
```

```
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```

```
ID="sles"
```

```
ANSI_COLOR="0;32"
```

```
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
```

```
Linux linux-bgfp 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 28 11:52
```

```
SPEC is set to: /home/temi/cpu2017
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   405G   32G  374G   8% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 1.1.7 08/10/2017
```

```
Memory:
```

```
22x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
```

```
2x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666
```

(End of data from sysinfo program)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 519.lbm_r(peak) 544.nab_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:

`-m64 -std=c11`

C++ benchmarks:

`-m64`

Fortran benchmarks:

`-m64`

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using both C and C++:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 203

PowerEdge R740xd (Intel Xeon Gold 6154, 3.00 GHz)

SPECrate2017_fp_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-28 21:24:43-0500.

Report generated on 2018-10-31 13:57:41 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.