



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8170, 2.10 GHz)

SPECrate2017_fp_base = 219

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

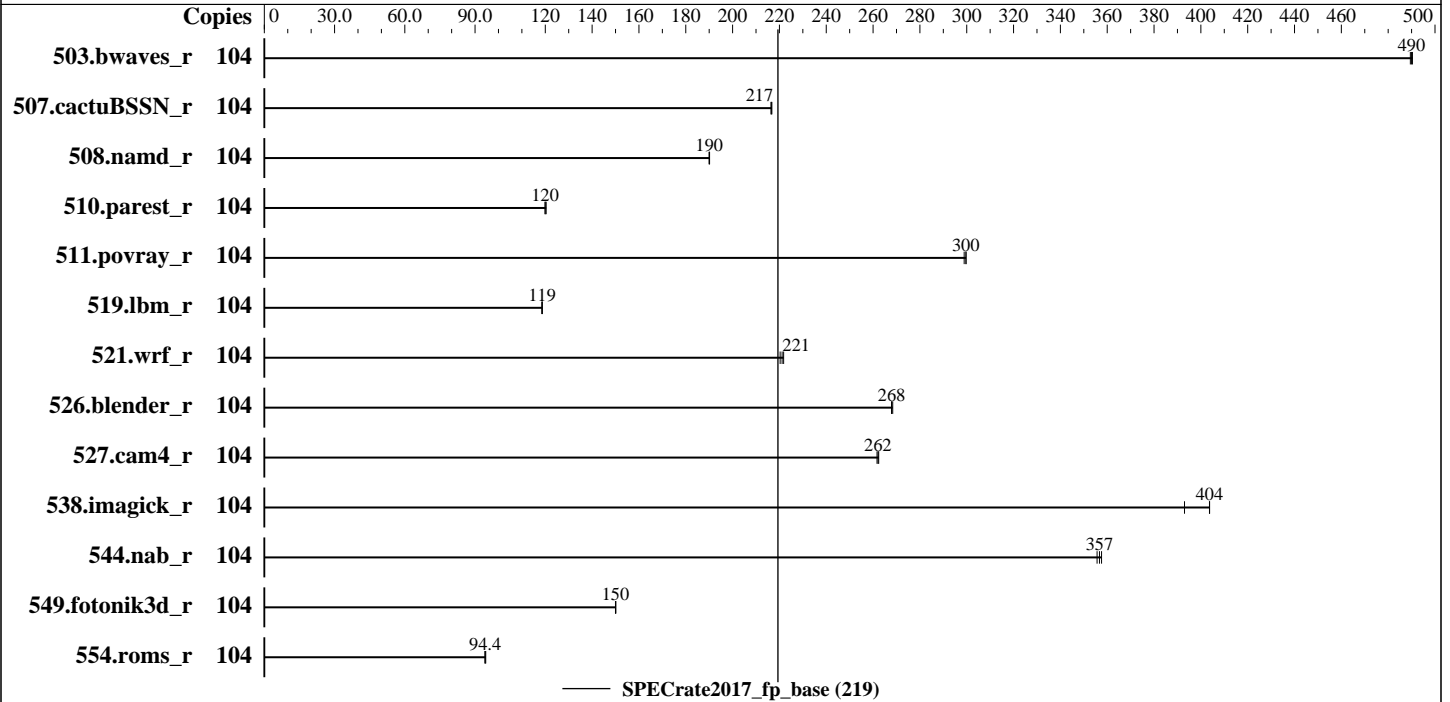

Hardware

CPU Name: Intel Xeon Platinum 8170
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 52 cores, 2 chips, 2 threads/core
 Orderable: 1-2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 460 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: version 1.1.7 released Oct-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8170, 2.10 GHz)

SPECrate2017_fp_base = 219

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	104	2127	490	2131	489	<u>2128</u>	<u>490</u>							
507.cactuBSSN_r	104	608	217	608	216	607	217							
508.namd_r	104	520	190	<u>520</u>	<u>190</u>	520	190							
510.parest_r	104	2269	120	2260	120	<u>2268</u>	<u>120</u>							
511.povray_r	104	810	300	812	299	810	300							
519.lbm_r	104	924	119	923	119	925	119							
521.wrf_r	104	1057	220	1053	221	1050	222							
526.blender_r	104	591	268	591	268	590	268							
527.cam4_r	104	694	262	695	262	693	262							
538.imagick_r	104	658	393	641	404	641	404							
544.nab_r	104	492	356	491	357	489	358							
549.fotonik3d_r	104	2700	150	2702	150	2702	150							
554.roms_r	104	1754	94.2	1751	94.4	1748	94.6							

SPECrate2017_fp_base = 219

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/temi/cpu2017/lib/ia32:/home/temi/cpu2017/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/temi/cpu2017/je5.0.1-32:/home/temi/cpu2017/je5.0.1-64"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8170, 2.10 GHz)

SPECrate2017_fp_base = 219

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes

BIOS settings:

Sub NUMA Cluster disabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/temi/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-bgfp Mon Nov 20 21:38:54 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz

2 "physical id"s (chips)

104 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 26

siblings : 52

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 104

On-line CPU(s) list: 0-103

Thread(s) per core: 2

Core(s) per socket: 26

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8170, 2.10 GHz)

SPECrate2017_fp_base = 219

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
Stepping: 4
CPU MHz: 2095.077
BogoMIPS: 4190.15
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s):
0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100
NUMA node1 CPU(s):
1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101
NUMA node2 CPU(s):
2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102
NUMA node3 CPU(s):
3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96
100
node 0 size: 95223 MB
node 0 free: 94767 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93 97
101
node 1 size: 96753 MB
node 1 free: 96359 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94 98
102
node 2 size: 96753 MB
node 2 free: 96344 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95 99
103

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8170, 2.10 GHz)

SPECrate2017_fp_base = 219

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```
node 3 size: 96750 MB
node 3 free: 96348 MB
node distances:
node  0  1  2  3
  0:  10  21  11  21
  1:  21  10  21  11
  2:  11  21  10  21
  3:  21  11  21  10
```

```
From /proc/meminfo
MemTotal:          394732004 kB
HugePages_Total:      0
Hugepagesize:       2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-bgfp 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 20 16:00

```
SPEC is set to: /home/temi/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   405G   32G  374G   8% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8170, 2.10 GHz)

SPECrate2017_fp_base = 219

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Platform Notes (Continued)

BIOS Dell Inc. 1.1.7 08/10/2017
Memory:
22x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
2x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

```

=====
CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC  511.povray_r(base) 526.blender_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
FC  507.cactuBSSN_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8170, 2.10 GHz)

SPECrate2017_fp_base = 219

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8170, 2.10 GHz)

SPECrate2017_fp_base = 219

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Portability Flags (Continued)

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R740xd (Intel Xeon Platinum 8170, 2.10 GHz)

SPECrate2017_fp_base = 219

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-20 22:38:53-0500.

Report generated on 2018-10-31 13:33:09 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.