



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology


ThinkSystem SR630
(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017_fp_base = 87.0

SPECspeed2017_fp_peak = 88.6

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

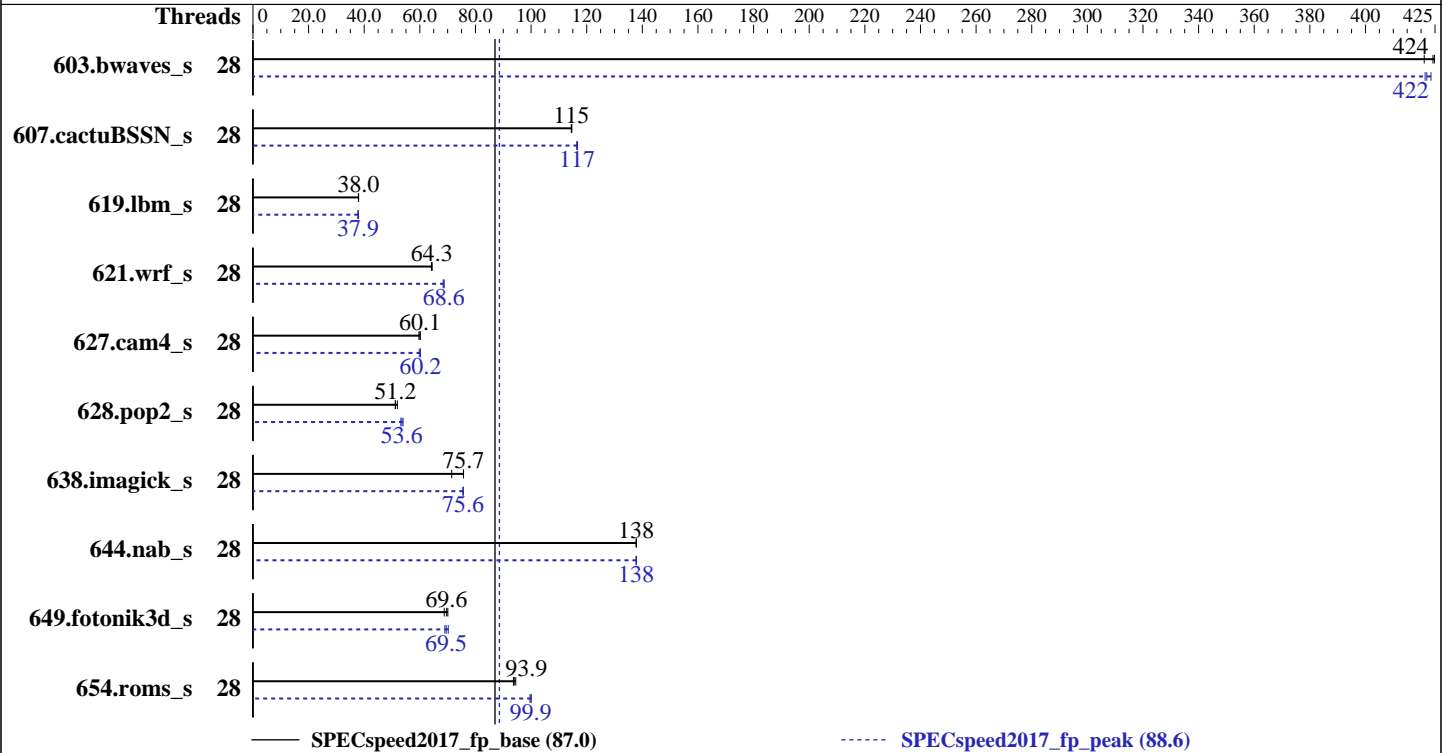

Hardware

CPU Name: Intel Xeon Gold 5120
 Max MHz.: 3200
 Nominal: 2200
 Enabled: 28 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 19.25 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
 Storage: 1 x 800 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Lenovo BIOS Version IVE109Q 1.00 released Jun-2017
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.20 GHz, Intel Xeon Gold 5120)

SPECSpeed2017_fp_base = 87.0

SPECSpeed2017_fp_peak = 88.6

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	28	139	425	140	421	<u>139</u>	<u>424</u>	28	139	424	140	421	<u>140</u>	<u>422</u>
607.cactuBSSN_s	28	145	115	146	114	<u>146</u>	<u>115</u>	28	<u>143</u>	<u>117</u>	143	116	143	117
619.lbm_s	28	<u>138</u>	<u>38.0</u>	138	38.0	138	37.9	28	139	37.8	138	37.9	<u>138</u>	<u>37.9</u>
621.wrf_s	28	206	64.2	<u>206</u>	<u>64.3</u>	205	64.4	28	<u>193</u>	<u>68.6</u>	192	68.7	193	68.4
627.cam4_s	28	149	59.7	147	60.1	<u>147</u>	<u>60.1</u>	28	148	59.8	147	60.2	<u>147</u>	<u>60.2</u>
628.pop2_s	28	229	51.9	<u>232</u>	<u>51.2</u>	232	51.2	28	223	53.2	<u>222</u>	<u>53.6</u>	220	54.0
638.imagick_s	28	202	71.5	<u>191</u>	<u>75.7</u>	191	75.7	28	<u>191</u>	<u>75.6</u>	191	75.5	191	75.6
644.nab_s	28	127	138	127	138	<u>127</u>	<u>138</u>	28	127	138	127	138	<u>127</u>	<u>138</u>
649.fotonik3d_s	28	<u>131</u>	<u>69.6</u>	130	70.1	133	68.8	28	132	69.0	<u>131</u>	<u>69.5</u>	130	70.2
654.roms_s	28	168	93.6	167	94.5	<u>168</u>	<u>93.9</u>	28	157	100	<u>158</u>	<u>99.9</u>	158	99.6

SPECSpeed2017_fp_base = 87.0

SPECSpeed2017_fp_peak = 88.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"

LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Hyper-Threading set to Disable

MONITORMWAIT set to Enable

Adjacent Cache Prefetch set to Disable

XPT Prefetcher set to Enable

Stale AtoS set to Enable

DCA set to Enable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017_fp_base = 87.0

SPECspeed2017_fp_peak = 88.6

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on Cable-SPECcpu2017-SUSE12SP2 Mon Dec 4 23:50:18 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
 2 "physical id"s (chips)
 28 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 14
siblings : 14
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 28
On-line CPU(s) list: 0-27
Thread(s) per core: 1
Core(s) per socket: 14
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
Stepping: 4
CPU MHz: 2194.857
BogoMIPS: 4389.71
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0-13
NUMA node1 CPU(s): 14-27
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdc m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017_fp_base = 87.0

SPECspeed2017_fp_peak = 88.6

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 19712 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13
node 0 size: 193110 MB
node 0 free: 190240 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 1 size: 193504 MB
node 1 free: 191382 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal: 395893364 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux Cable-SPECcpu2017-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017_fp_base = 87.0

SPECspeed2017_fp_peak = 88.6

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

run-level 3 Dec 2 20:35

SPEC is set to: /home/cpu2017.1.0.2.icl8.0
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 btrfs 744G 171G 573G 23% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE109Q-1.00]- 06/28/2017

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 619.lbm_s(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017_fp_base = 87.0

SPECspeed2017_fp_peak = 88.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CC 621.wrf_s(peak) 628.pop2_s(peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 87.0

ThinkSystem SR630
(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017_fp_peak = 88.6

CPU2017 License: 9017

Test Date: Dec-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017_fp_base = 87.0

SPECspeed2017_fp_peak = 88.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

`-nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:

`-m64 -std=c11`

Fortran benchmarks:

`-m64`

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`

Peak Compiler Invocation

C benchmarks:

`icc`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`ifort icc`

Benchmarks using Fortran, C, and C++:

`icpc icc ifort`

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017_fp_base = 87.0

SPECspeed2017_fp_peak = 88.6

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Peak Optimization Flags

C benchmarks:

619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP

638.imagick_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp
-nonstandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nonstandard-realloc-lhs -align array32byte

627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nonstandard-realloc-lhs -align array32byte

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nonstandard-realloc-lhs
-align array32byte

Peak Other Flags

C benchmarks:

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630
(2.20 GHz, Intel Xeon Gold 5120)

SPECspeed2017_fp_base = 87.0

SPECspeed2017_fp_peak = 88.6

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-04 10:50:17-0500.

Report generated on 2018-10-31 13:49:02 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.