



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro


SuperStorage 5049P-E1CR45H (X11SPL-F, Intel Xeon Platinum 8153)

SPECspeed2017\_int\_base = 6.65

SPECspeed2017\_int\_peak = 6.83

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Mar-2018

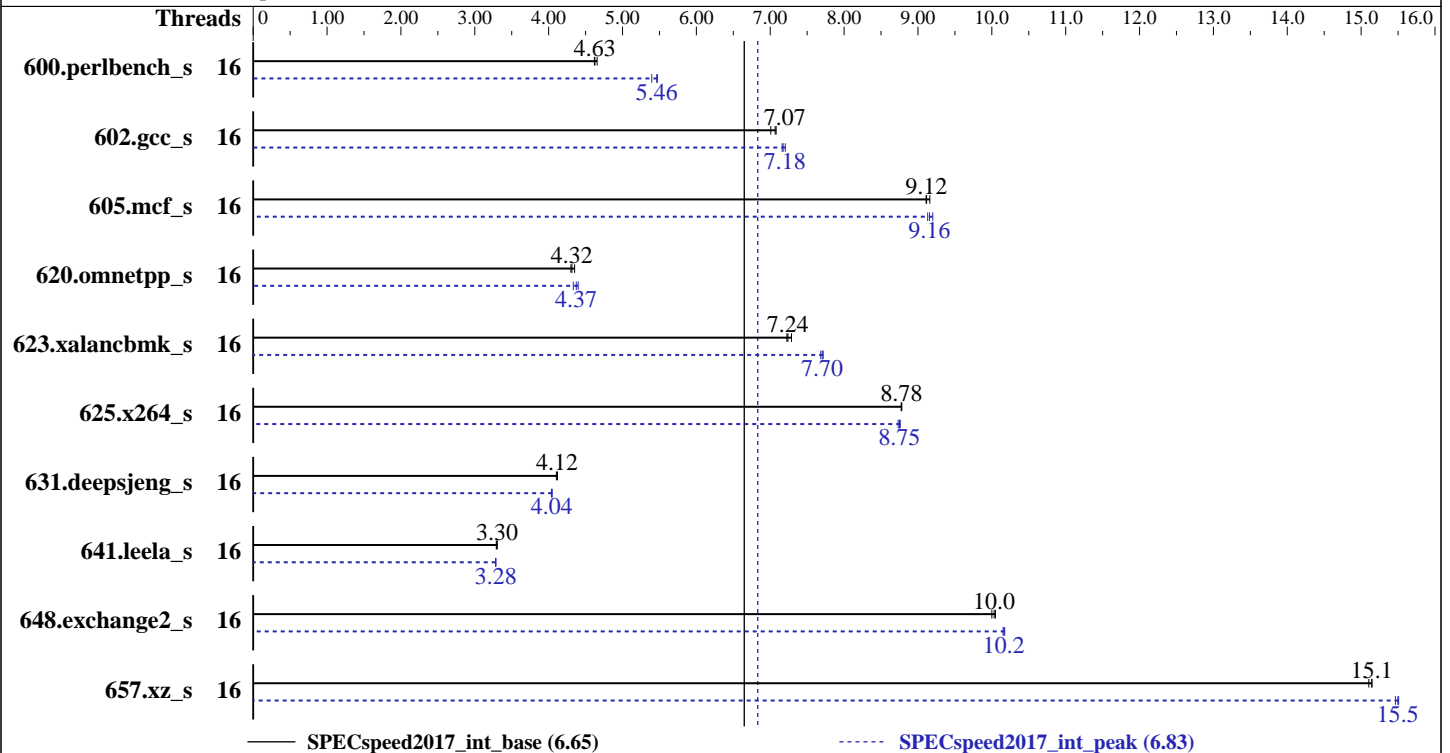

### Hardware

CPU Name: Intel Xeon Platinum 8153  
Max MHz.: 2800  
Nominal: 2000  
Enabled: 16 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 22 MB I+D on chip per chip  
Other: None  
Memory: 192 GB (6 x 32 GB 2Rx4 PC4-2666V-R)  
Storage: 1 x 2 TB SATA III, 7200 RPM  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3  
4.4.114-94.11-default  
Compiler: C/C++: Version 18.0.2.199 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.2.199 of Intel Fortran  
Compiler for Linux  
Parallel: Yes  
Firmware: Supermicro BIOS version 2.0b released Feb-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5049P-E1CR45H (X11SPL-F, Intel Xeon Platinum 8153)

SPECspeed2017\_int\_base = 6.65

SPECspeed2017\_int\_peak = 6.83

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jul-2017  
Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	16	384	4.62	381	4.66	<b>384</b>	<b>4.63</b>	16	324	5.47	<b>325</b>	<b>5.46</b>	329	5.40
602.gcc_s	16	562	7.08	568	7.01	<b>564</b>	<b>7.07</b>	16	<b>555</b>	<b>7.18</b>	556	7.16	553	7.20
605.mcf_s	16	515	9.16	<b>518</b>	<b>9.12</b>	518	9.11	16	513	9.20	<b>516</b>	<b>9.16</b>	517	9.13
620.omnetpp_s	16	<b>378</b>	<b>4.32</b>	375	4.35	379	4.30	16	376	4.33	371	4.40	<b>373</b>	<b>4.37</b>
623.xalancbmk_s	16	194	7.29	196	7.23	<b>196</b>	<b>7.24</b>	16	<b>184</b>	<b>7.70</b>	184	7.68	184	7.72
625.x264_s	16	201	8.77	<b>201</b>	<b>8.78</b>	201	8.78	16	202	8.73	201	8.76	<b>202</b>	<b>8.75</b>
631.deepsjeng_s	16	348	4.12	<b>348</b>	<b>4.12</b>	349	4.10	16	<b>355</b>	<b>4.04</b>	354	4.05	355	4.04
641.leela_s	16	517	3.30	<b>517</b>	<b>3.30</b>	518	3.29	16	519	3.28	<b>520</b>	<b>3.28</b>	520	3.28
648.exchange2_s	16	294	10.0	<b>293</b>	<b>10.0</b>	293	10.0	16	289	10.2	<b>289</b>	<b>10.2</b>	290	10.2
657.xz_s	16	<b>408</b>	<b>15.1</b>	409	15.1	408	15.1	16	<b>399</b>	<b>15.5</b>	399	15.5	400	15.5

SPECspeed2017\_int\_base = 6.65

SPECspeed2017\_int\_peak = 6.83

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc: jemalloc, a general purpose malloc implementation;

jemalloc: built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>;

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5049P-E1CR45H (X11SPL-F,  
Intel Xeon Platinum 8153)

SPECspeed2017\_int\_base = 6.65

SPECspeed2017\_int\_peak = 6.83

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

## Platform Notes

BIOS Settings:

Hyper-Threading = Disable  
LLC prefetch = Enable  
Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance  
Hardware P-state = Out of Band Mode  
XPT Prefetch = Enable  
Stale AtoS = Enable  
LLC dead line alloc = Disable  
SDDC Plus One = Disable  
ADDDC Sparing = Disable  
Patrol Scrub = Disable  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-9m9c Wed Jun 27 03:35:27 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
 1 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:   0-15
Thread(s) per core:    1
Core(s) per socket:    16
Socket(s):             1
NUMA node(s):         2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
Stepping:              4
CPU MHz:               1999.988
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5049P-E1CR45H (X11SPL-F,  
Intel Xeon Platinum 8153)

SPECspeed2017\_int\_base = 6.65

SPECspeed2017\_int\_peak = 6.83

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```

BogoMIPS:          3999.97
Virtualization:    VT-x
L1d cache:        32K
L1i cache:        32K
L2 cache:         1024K
L3 cache:         22528K
NUMA node0 CPU(s): 0-3,8-11
NUMA node1 CPU(s): 4-7,12-15
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 8 9 10 11
node 0 size: 95258 MB
node 0 free: 94871 MB
node 1 cpus: 4 5 6 7 12 13 14 15
node 1 size: 96627 MB
node 1 free: 96286 MB
node distances:
node  0  1
 0:   10  11
 1:   11  10

```

```

From /proc/meminfo
MemTotal:          196491296 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)

```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5049P-E1CR45H (X11SPL-F,  
Intel Xeon Platinum 8153)

SPECspeed2017\_int\_base = 6.65

SPECspeed2017\_int\_peak = 6.83

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

## Platform Notes (Continued)

```

VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

```

uname -a:
Linux linux-9m9c 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jun 27 03:33

```

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   1.8T   45G  1.8T   3% /home

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS American Megatrends Inc. 2.0b 02/26/2018
Memory:
2x NO DIMM NO DIMM
6x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
    peak) 657.xz_s(base)
-----
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)

```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5049P-E1CR45H (X11SPL-F,  
Intel Xeon Platinum 8153)

SPECspeed2017\_int\_base = 6.65

SPECspeed2017\_int\_peak = 6.83

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

## Compiler Version Notes (Continued)

-----  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(base) 623.xalanbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(peak) 623.xalanbmk\_s(peak) 631.deepsjeng\_s(peak)  
641.leela\_s(peak)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 648.exchange2\_s(base, peak)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5049P-E1CR45H (X11SPL-F ,  
Intel Xeon Platinum 8153)

SPECspeed2017\_int\_base = 6.65

SPECspeed2017\_int\_peak = 6.83

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

## Base Portability Flags (Continued)

```
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
623.xalancbmk_s: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5049P-E1CR45H (X11SPL-F,  
Intel Xeon Platinum 8153)

SPECspeed2017\_int\_base = 6.65

SPECspeed2017\_int\_peak = 6.83

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Mar-2018

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-prefetch -ipo -O3
-qopt-mem-layout-trans=3 -no-prec-div
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-prefetch -ipo -O3
-qopt-mem-layout-trans=3 -no-prec-div
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: Same as 602.gcc_s
```

C++ benchmarks:

```
620.omnetpp_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
```

(Continued on next page)





# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperStorage 5049P-E1CR45H (X11SPL-F,  
Intel Xeon Platinum 8153)

SPECspeed2017\_int\_base = 6.65

SPECspeed2017\_int\_peak = 6.83

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Jun-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

620.omnetpp\_s (continued):

```
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

623.xalancbmk\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-prefetch
```

```
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
```

```
-DSPEC_OPENMP -L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
```

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-27 03:35:27-0400.

Report generated on 2018-10-31 18:45:00 by CPU2017 PDF formatter v6067.

Originally published on 2018-07-24.