



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.20 GHz, Intel Xeon Gold 6134)

SPECSpeed2017_fp_base = 94.9

SPECSpeed2017_fp_peak = 95.4

CPU2017 License: 9016


Test Date: Jul-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2018

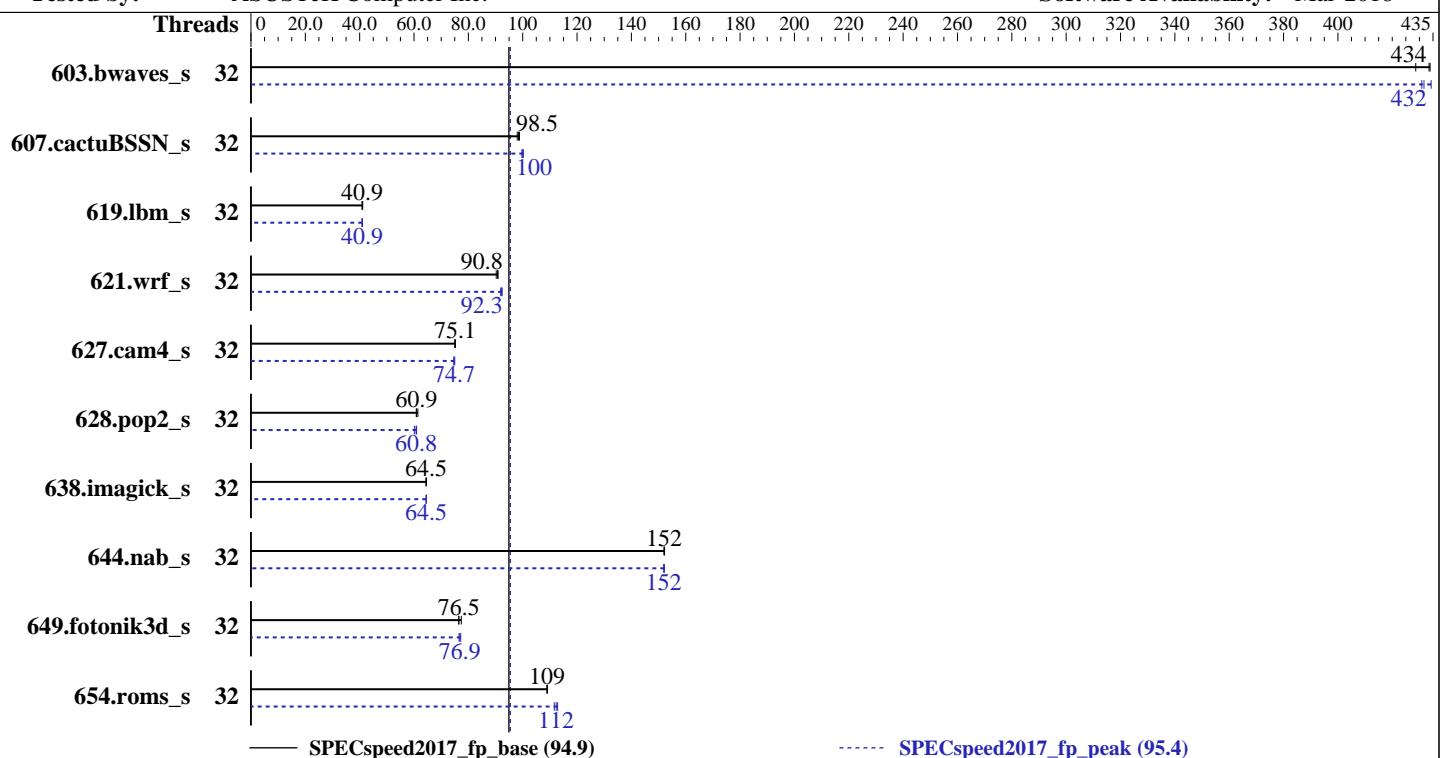

Hardware

CPU Name: Intel Xeon Gold 6134
Max MHz.: 3700
Nominal: 3200
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 24.75 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
Storage: 1 x 240 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP3
Kernel 4.4.120-94.17-default
Compiler: C/C++: Version 18.0.3.222 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.3.222 of Intel Fortran
Compiler for Linux
Parallel: Yes
Firmware: Version 0905 released Mar-2018
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.20 GHz, Intel Xeon Gold 6134)

SPECSpeed2017_fp_base = 94.9

SPECSpeed2017_fp_peak = 95.4

CPU2017 License: 9016

Test Date: Jul-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	<u>136</u>	<u>434</u>	138	429	136	434	32	<u>137</u>	<u>431</u>	136	434	<u>137</u>	<u>432</u>
607.cactuBSSN_s	32	<u>169</u>	<u>98.5</u>	170	98.0	169	98.8	32	<u>167</u>	<u>99.7</u>	166	100	<u>167</u>	<u>100</u>
619.lbm_s	32	128	40.9	<u>128</u>	<u>40.9</u>	127	41.1	32	128	41.0	<u>128</u>	<u>40.9</u>	128	40.9
621.wrf_s	32	145	90.9	<u>146</u>	<u>90.8</u>	147	90.3	32	144	91.9	143	92.4	<u>143</u>	<u>92.3</u>
627.cam4_s	32	<u>118</u>	<u>75.1</u>	118	75.2	118	75.0	32	119	74.7	118	75.0	<u>119</u>	<u>74.7</u>
628.pop2_s	32	193	61.4	<u>195</u>	<u>60.9</u>	195	60.8	32	195	61.0	<u>195</u>	<u>60.8</u>	197	60.1
638.imagick_s	32	<u>224</u>	<u>64.5</u>	223	64.6	224	64.5	32	224	64.5	<u>224</u>	<u>64.5</u>	224	64.5
644.nab_s	32	<u>115</u>	<u>152</u>	115	152	115	152	32	115	<u>152</u>	<u>115</u>	<u>152</u>	115	152
649.fotonik3d_s	32	<u>119</u>	<u>76.5</u>	119	76.5	118	77.4	32	118	77.2	119	76.6	<u>119</u>	<u>76.9</u>
654.roms_s	32	144	109	<u>144</u>	<u>109</u>	145	109	32	140	113	141	112	<u>140</u>	<u>112</u>
SPECSpeed2017_fp_base = 94.9														
SPECSpeed2017_fp_peak = 95.4														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

SNC = Disabled

IMC interleaving = AUTO

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.20 GHz, Intel Xeon Gold 6134)

SPECspeed2017_fp_base = 94.9

SPECspeed2017_fp_peak = 95.4

CPU2017 License: 9016

Test Date: Jul-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2018

Platform Notes (Continued)

Patrol Scrub = Disabled

VT-d = Disabled

HyperThreading = Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-pmm5 Mon Jul 16 22:24:08 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6134 CPU @ 3.20GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 1 2 3 4 8 18 24 27

physical 1: cores 0 2 3 9 16 19 26 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

On-line CPU(s) list: 0-31

Thread(s) per core: 2

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 6134 CPU @ 3.20GHz

Stepping: 4

CPU MHz: 3201.000

CPU max MHz: 3201.0000

CPU min MHz: 1200.0000

BogoMIPS: 6592.27

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

L3 cache: 25344K

NUMA node0 CPU(s): 0-7,16-23

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.20 GHz, Intel Xeon Gold 6134)

SPECspeed2017_fp_base = 94.9

SPECspeed2017_fp_peak = 95.4

CPU2017 License: 9016

Test Date: Jul-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2018

Platform Notes (Continued)

```
NUMA node1 CPU(s): 8-15,24-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movebe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqmq mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occup_llc pkru ospke
```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
node 0 size: 192067 MB
node 0 free: 188933 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 193516 MB
node 1 free: 187308 MB
node distances:
node 0 1
 0: 10 21
 1: 21 10
```

From /proc/meminfo

```
MemTotal: 394837896 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.20 GHz, Intel Xeon Gold 6134)

SPECSPEED2017_fp_base = 94.9

SPECSPEED2017_fp_peak = 95.4

CPU2017 License: 9016

Test Date: Jul-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2018

Platform Notes (Continued)

```
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
```

```
Linux linux-pmm5 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

```
run-level 3 Jul 16 09:42
```

```
SPEC is set to: /spec2017
```

```
Filesystem      Type   Size  Used Avail Use% Mounted on
/dev/sda2       btrfs  203G  99G  103G  49%  /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 0905 03/19/2018
```

```
Memory:
```

```
12x Kingston D4-26662R4-32G 32 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
```

```
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 619.lbm_s(peak)
-----
```

```
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.20 GHz, Intel Xeon Gold 6134)

SPECspeed2017_fp_base = 94.9

SPECspeed2017_fp_peak = 95.4

CPU2017 License: 9016

Test Date: Jul-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2018

Compiler Version Notes (Continued)

FC 607.cactubSSN_s(base)

```
icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

FC 607.cactubSSN_s(peak)

```
icpc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

```
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)

```
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)

```
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

CC 621.wrf_s(peak) 628.pop2_s(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.20 GHz, Intel Xeon Gold 6134)

SPECspeed2017_fp_base = 94.9

SPECspeed2017_fp_peak = 95.4

CPU2017 License: 9016

Test Date: Jul-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2018

Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.3 20180410
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.20 GHz, Intel Xeon Gold 6134)

SPECspeed2017_fp_base = 94.9

SPECspeed2017_fp_peak = 95.4

CPU2017 License: 9016

Test Date: Jul-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2018

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.20 GHz, Intel Xeon Gold 6134)

SPECspeed2017_fp_base = 94.9

SPECspeed2017_fp_peak = 95.4

CPU2017 License: 9016

Test Date: Jul-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

619.lbm_s (continued):

-DSPEC_OPENMP

638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
-align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.html>
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z11-V2.0-revD.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720Q-E9(Z11PH-D12) Server System
(3.20 GHz, Intel Xeon Gold 6134)

SPECSPEED2017_fp_base = 94.9

SPECSPEED2017_fp_peak = 95.4

CPU2017 License: 9016

Test Date: Jul-2018

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2018

Tested by: ASUSTeK Computer Inc.

Software Availability: Mar-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-07-16 10:24:07-0400.

Report generated on 2019-03-08 20:40:25 by CPU2017 PDF formatter v6067.

Originally published on 2018-08-21.