



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.80 GHz, Intel Xeon E-2186G)

SPECSpeed2017_int_base = 10.7

SPECSpeed2017_int_peak = 11.0

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2018

Hardware Availability: Sep-2018

Software Availability: Oct-2018

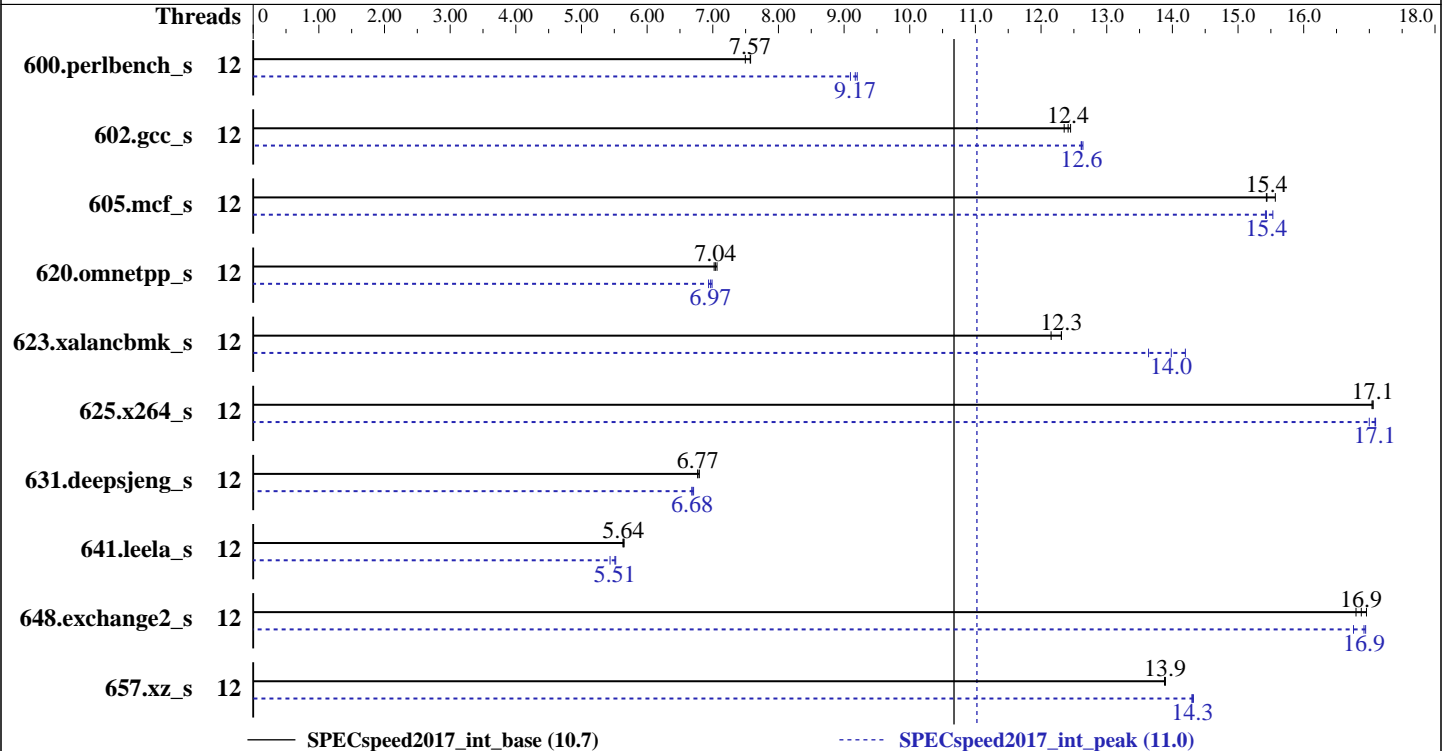

Hardware

CPU Name: Intel Xeon E-2186G
 Max MHz.: 4700
 Nominal: 3800
 Enabled: 6 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 12 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
 Storage: 1 x 500 GB SATA HDD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 (x86_64) SP3
 Kernel 4.4.120-94.17-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler for Linux
 Parallel: Yes
 Firmware: Version 0303 released Aug-2018
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library
 V5.0.1



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017_int_base = 10.7

SPECspeed2017_int_peak = 11.0

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2018

Hardware Availability: Sep-2018

Software Availability: Oct-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	12	234	7.57	237	7.50	234	7.58	12	193	9.20	194	9.17	195	9.10
602.gcc_s	12	322	12.4	321	12.4	320	12.4	12	315	12.6	316	12.6	316	12.6
605.mcf_s	12	306	15.4	303	15.6	306	15.4	12	306	15.4	304	15.5	306	15.4
620.omnetpp_s	12	232	7.02	231	7.06	232	7.04	12	233	6.99	234	6.97	235	6.94
623.xalancbmk_s	12	115	12.3	117	12.2	115	12.3	12	104	13.6	99.8	14.2	101	14.0
625.x264_s	12	103	17.1	104	17.0	103	17.1	12	104	17.0	103	17.1	103	17.1
631.deepsjeng_s	12	212	6.77	211	6.80	212	6.77	12	214	6.68	214	6.68	214	6.71
641.leela_s	12	302	5.65	303	5.63	303	5.64	12	310	5.51	314	5.44	309	5.52
648.exchange2_s	12	173	17.0	174	16.9	175	16.8	12	174	16.9	175	16.8	174	16.9
657.xz_s	12	445	13.9	445	13.9	445	13.9	12	432	14.3	432	14.3	432	14.3

SPECspeed2017_int_base = **10.7**

SPECspeed2017_int_peak = **11.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/spec2017_2019u1/lib/ia32:/spec2017_2019u1/lib/intel64:/spec2017_2019u1/je5.0.1-32:/spec2017_2019u1/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or

<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017_int_base = 10.7

SPECspeed2017_int_peak = 11.0

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2018

Hardware Availability: Sep-2018

Software Availability: Oct-2018

Platform Notes

BIOS Configuration:

VT-d = Disabled

Software Guard Extensions (SGX) = Disabled

AES = Disabled

Sysinfo program /spec2017_2019ul/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-pmm5 Fri Dec 7 16:34:57 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) E-2186G CPU @ 3.80GHz

1 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 12

On-line CPU(s) list: 0-11

Thread(s) per core: 2

Core(s) per socket: 6

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

Model name: Intel(R) Xeon(R) E-2186G CPU @ 3.80GHz

Stepping: 10

CPU MHz: 4520.920

CPU max MHz: 4700.0000

CPU min MHz: 800.0000

BogoMIPS: 7583.95

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 256K

L3 cache: 12288K

NUMA node0 CPU(s): 0-11

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017_int_base = 10.7

SPECspeed2017_int_peak = 11.0

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2018

Hardware Availability: Sep-2018

Software Availability: Oct-2018

Platform Notes (Continued)

```
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
hwp hwp_notify hwp_act_window hwp_epp intel_pt rsb_ctxsw spec_ctrl stibp retpoline
kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1
```

```
/proc/cpuinfo cache data
cache size : 12288 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 64313 MB
node 0 free: 63709 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal:        65857264 kB
HugePages_Total:    0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-pmm5 4.4.120-94.17-default #1 SMP Wed Mar 14 17:23:00 UTC 2018 (cf3a7bb)
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017_int_base = 10.7

SPECspeed2017_int_peak = 11.0

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2018

Hardware Availability: Sep-2018

Software Availability: Oct-2018

Platform Notes (Continued)

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

run-level 3 Dec 7 16:33

SPEC is set to: /spec2017_2019u1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	445G	103G	341G	24%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0303 08/07/2018

Memory:

4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667, configured at 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base, peak) 657.xz_s(base)
=====

icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
=====

icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
=====

=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
=====

icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017_int_base = 10.7

SPECspeed2017_int_peak = 11.0

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2018

Hardware Availability: Sep-2018

Software Availability: Oct-2018

Compiler Version Notes (Continued)

=====
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)
641.leela_s(peak)
=====

icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 648.exchange2_s(base, peak)
=====

ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017_int_base = 10.7

SPECspeed2017_int_peak = 11.0

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2018

Hardware Availability: Sep-2018

Software Availability: Oct-2018

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
623.xalancbmk_s: icpc -m32 -L/home/prasadj/specdev/IC18u2_Internal/lin_18_0_20180210/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017_int_base = 10.7

SPECspeed2017_int_peak = 11.0

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2018

Hardware Availability: Sep-2018

Software Availability: Oct-2018

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-prefetch -ipo -O3
-qopt-mem-layout-trans=3 -no-prec-div
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-prefetch -ipo -O3
-qopt-mem-layout-trans=3 -no-prec-div
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -w1,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

```
620.omnetpp_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
623.xalancbmk_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: Same as 620.omnetpp_s

Fortran benchmarks:

```
-w1,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```




SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS300-E10(P11C-C/4L) Server System
(3.80 GHz, Intel Xeon E-2186G)

SPECspeed2017_int_base = 10.7

SPECspeed2017_int_peak = 11.0

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Dec-2018

Hardware Availability: Sep-2018

Software Availability: Oct-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-p11-V2.0-revA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-12-07 03:34:56-0500.

Report generated on 2019-01-22 16:44:22 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-22.