



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro


SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

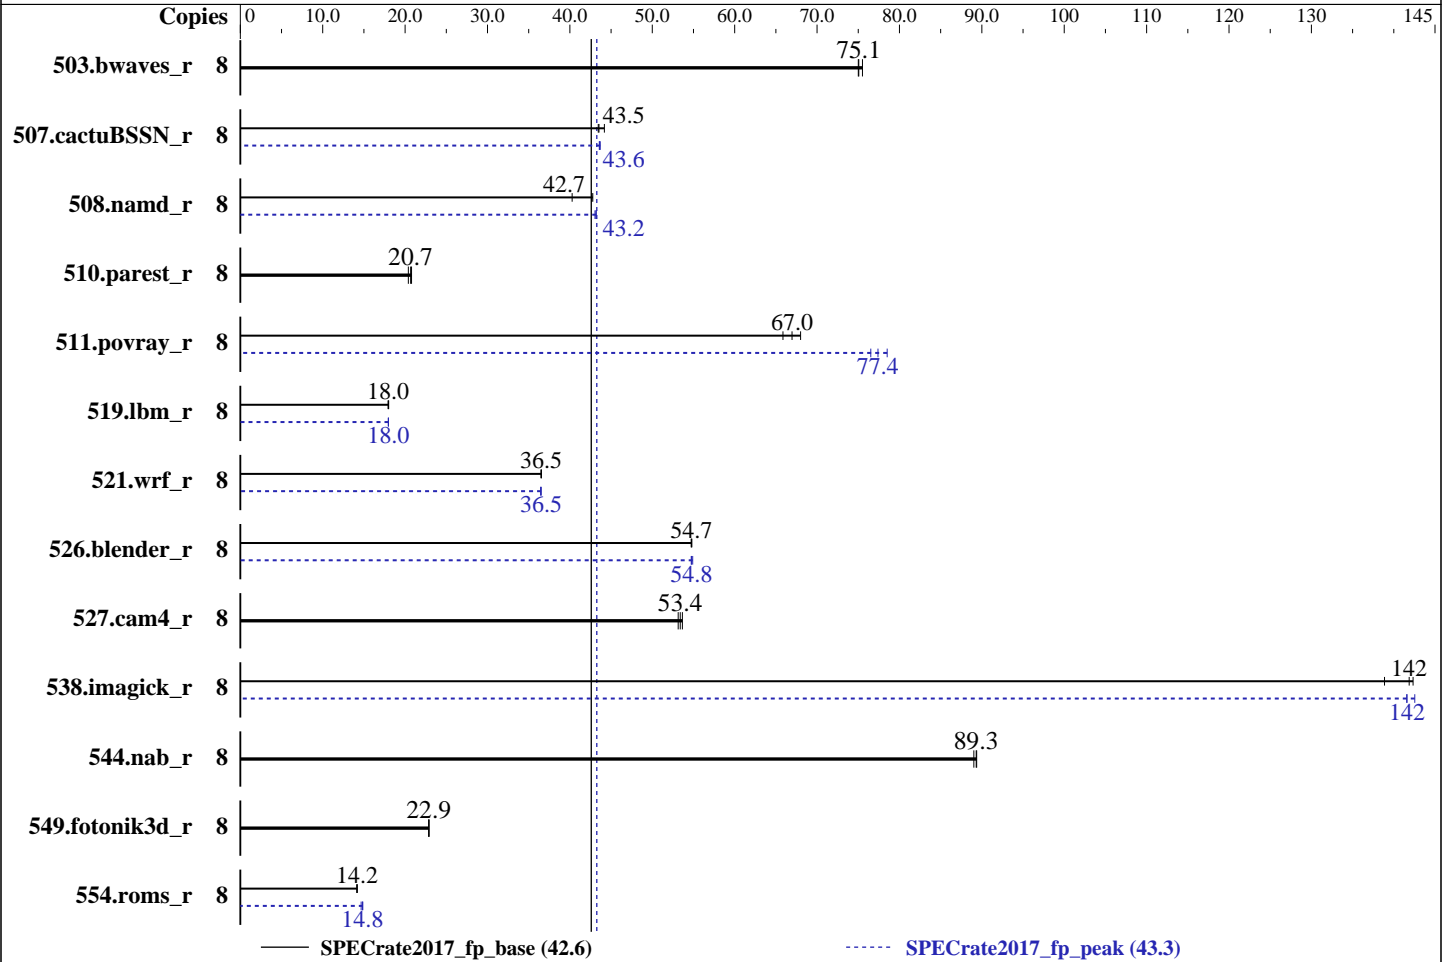

Hardware

CPU Name: Intel Core i7-9700K
Max MHz.: 4900
Nominal: 3600
Enabled: 8 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 256 KB I+D on chip per core
L3: 12 MB I+D on chip per chip
Other: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
Storage: 1 x 200 GB SATA III SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
Kernel 4.4.114-94.11-default
Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Version 1.0a released Sep-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	1062	75.5	1069	75.1	1070	75.0	8	1062	75.5	1069	75.1	1070	75.0
507.cactuBSSN_r	8	229	44.2	233	43.4	233	43.5	8	232	43.6	232	43.6	232	43.7
508.namd_r	8	178	42.7	178	42.8	189	40.3	8	177	43.0	176	43.2	176	43.2
510.parest_r	8	1012	20.7	1007	20.8	1026	20.4	8	1012	20.7	1007	20.8	1026	20.4
511.povray_r	8	284	65.9	279	67.0	275	68.0	8	238	78.5	241	77.4	244	76.5
519.lbm_r	8	468	18.0	470	17.9	470	18.0	8	469	18.0	469	18.0	470	18.0
521.wrf_r	8	491	36.5	490	36.5	491	36.5	8	491	36.5	491	36.5	492	36.4
526.blender_r	8	223	54.7	222	54.8	223	54.7	8	222	54.9	222	54.8	223	54.7
527.cam4_r	8	263	53.1	262	53.4	261	53.7	8	263	53.1	262	53.4	261	53.7
538.imagick_r	8	143	139	140	142	140	142	8	140	143	141	142	141	142
544.nab_r	8	151	89.4	151	89.0	151	89.3	8	151	89.4	151	89.0	151	89.3
549.fotonik3d_r	8	1361	22.9	1363	22.9	1363	22.9	8	1361	22.9	1363	22.9	1363	22.9
554.roms_r	8	896	14.2	897	14.2	899	14.1	8	855	14.9	857	14.8	867	14.7

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-65nv Fri Jan 4 19:02:17 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Core(TM) i7-9700K CPU @ 3.60GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 8
On-line CPU(s) list: 0-7
Thread(s) per core: 1
Core(s) per socket: 8
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 158
Model name: Intel(R) Core(TM) i7-9700K CPU @ 3.60GHz
Stepping: 12
CPU MHz: 4870.129
CPU max MHz: 4900.0000
CPU min MHz: 800.0000
BogoMIPS: 7199.97
Virtualization: VT-x
Lld cache: 32K
Lli cache: 32K
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

Platform Notes (Continued)

```

L2 cache:                256K
L3 cache:                12288K
NUMA node0 CPU(s):      0-7
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_notify hwp_act_window hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline
kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 64283 MB
node 0 free: 52685 MB
node distances:
node    0
0:     10

```

From /proc/meminfo

```

MemTotal:        65825824 kB
HugePages_Total: 0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

Platform Notes (Continued)

```
uname -a:
Linux linux-65nv 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):      Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

```
run-level 3 Jan 4 14:01
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   145G   35G  110G   25% /home
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 1.0a 09/27/2018
Memory:
4x Micron 18ADF2G72AZ-2G6H1R 16 GB 2 rank 2667
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
```

```
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 519.lbm_r(peak)
-----
```

```
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 508.namd_r(base) 510.parest_r(base, peak)
-----
```

```
icpc (ICC) 18.0.2 20180210
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base, peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base, peak)

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

Compiler Version Notes (Continued)

FC 554.roms_r(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)

ifort (IFORT) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```




SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

```
544.nab_r: basepeak = yes
```

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

Peak Optimization Flags (Continued)

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SKL-revD.xml>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Core i7-9700K)

SPECrate2017_fp_base = 42.6

SPECrate2017_fp_peak = 43.3

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jan-2019
Hardware Availability: Oct-2018
Software Availability: Mar-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-01-04 06:02:17-0500.
Report generated on 2019-01-22 16:45:04 by CPU2017 PDF formatter v6067.
Originally published on 2019-01-22.