



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu


PRIMERGY RX2540 M5, Intel Xeon Platinum 8280, 2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Mar-2019  
Hardware Availability: May-2019  
Software Availability: Feb-2019

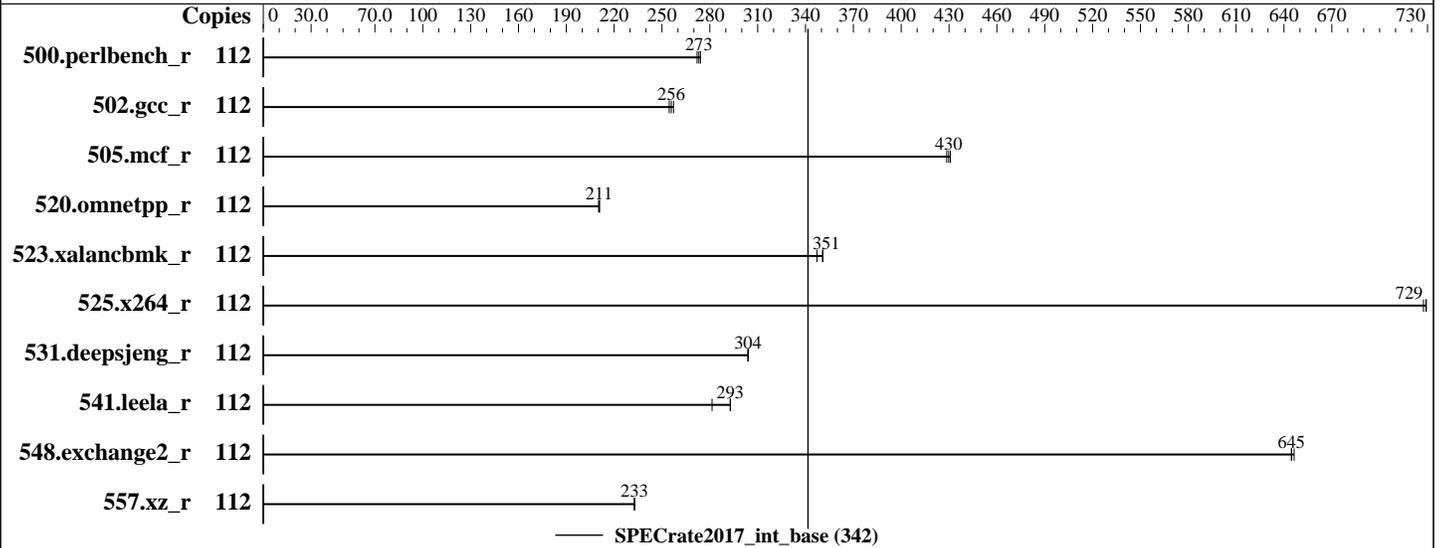

### Hardware

CPU Name: Intel Xeon Platinum 8280  
 Max MHz.: 4000  
 Nominal: 2700  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x SATA M.2 SSD, 240GB  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15  
 4.12.14-25.28-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler Build for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler Build for Linux  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V5.0.0.14 R1.8.0 for D3384-B1x. Released Jun-2019 tested as V5.0.0.14 R1.2.0 for D3384-B1x Feb-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280, 2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Mar-2019  
Hardware Availability: May-2019  
Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	650	274	<b><u>653</u></b>	<b><u>273</u></b>	656	272							
502.gcc_r	112	623	255	617	257	<b><u>620</u></b>	<b><u>256</u></b>							
505.mcf_r	112	420	431	<b><u>421</u></b>	<b><u>430</u></b>	422	429							
520.omnetpp_r	112	697	211	699	210	<b><u>697</u></b>	<b><u>211</u></b>							
523.xalancbmk_r	112	337	351	341	347	<b><u>337</u></b>	<b><u>351</u></b>							
525.x264_r	112	269	729	270	727	<b><u>269</u></b>	<b><u>729</u></b>							
531.deepsjeng_r	112	422	304	<b><u>422</u></b>	<b><u>304</u></b>	422	304							
541.leela_r	112	633	293	<b><u>633</u></b>	<b><u>293</u></b>	659	281							
548.exchange2_r	112	455	645	<b><u>455</u></b>	<b><u>645</u></b>	454	646							
557.xz_r	112	520	233	519	233	<b><u>520</u></b>	<b><u>233</u></b>							

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-111

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-1.0.5/lib/ia32"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/Benchmark/speccpu2017-1.0.5/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/Benchmark/speccpu2017-1.0.5/je5.0.1-32"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/Benchmark/speccpu2017-1.0.5/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280, 2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2019  
**Hardware Availability:** May-2019  
**Software Availability:** Feb-2019

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Patrol Scrub = Disabled  
DCU Ip Prefetcher = Disabled  
DCU Streamer Prefetcher = Disabled  
Fan Control = Full  
Stale AtoS = Enable  
WR CRC feature Control = Disabled  
Sysinfo program /home/Benchmark/speccpu2017-1.0.5/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on RX2540M5 Fri Mar 15 01:24:41 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz  
2 "physical id"s (chips)  
112 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 28  
siblings : 56  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 112  
On-line CPU(s) list: 0-111  
Thread(s) per core: 2  
Core(s) per socket: 28  
Socket(s): 2

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280, 2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2019  
**Hardware Availability:** May-2019  
**Software Availability:** Feb-2019

### Platform Notes (Continued)

```

NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping: 7
CPU MHz: 2700.000
CPU max MHz: 4000.0000
CPU min MHz: 1000.0000
BogoMIPS: 5400.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke avx512_vnni
flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
79
node 0 size: 191966 MB
node 0 free: 191469 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
82 83
node 1 size: 193501 MB
node 1 free: 193206 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280, 2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2019

Hardware Availability: May-2019

Software Availability: Feb-2019

## Platform Notes (Continued)

```

101 105 106 107
node 2 size: 193530 MB
node 2 free: 193249 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
108 109 110 111
node 3 size: 193318 MB
node 3 free: 192981 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

From /proc/meminfo
MemTotal:          790851800 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

uname -a:
Linux RX2540M5 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling

run-level 3 Mar 14 14:54

SPEC is set to: /home/Benchmark/speccpu2017-1.0.5
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   191G   61G  131G  32% /home

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280, 2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Mar-2019  
Hardware Availability: May-2019  
Software Availability: Feb-2019

### Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.2.0 for D3384-B1x  
02/28/2019

Memory:

24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

=====  
FC 548.exchange2\_r(base)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====

### Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280,  
2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2019

Hardware Availability: May-2019

Software Availability: Feb-2019

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64

-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64

-lqkmalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte

-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64

-lqkmalloc



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M5, Intel Xeon Platinum 8280,  
2.70GHz

SPECrate2017\_int\_base = 342

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Mar-2019  
**Hardware Availability:** May-2019  
**Software Availability:** Feb-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-14 12:24:40-0400.  
Report generated on 2019-05-23 12:09:08 by CPU2017 PDF formatter v6067.  
Originally published on 2019-04-02.