



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 97.7

Huawei CH121 V5 (Intel Xeon Silver 4215)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175


Test Date: Apr-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

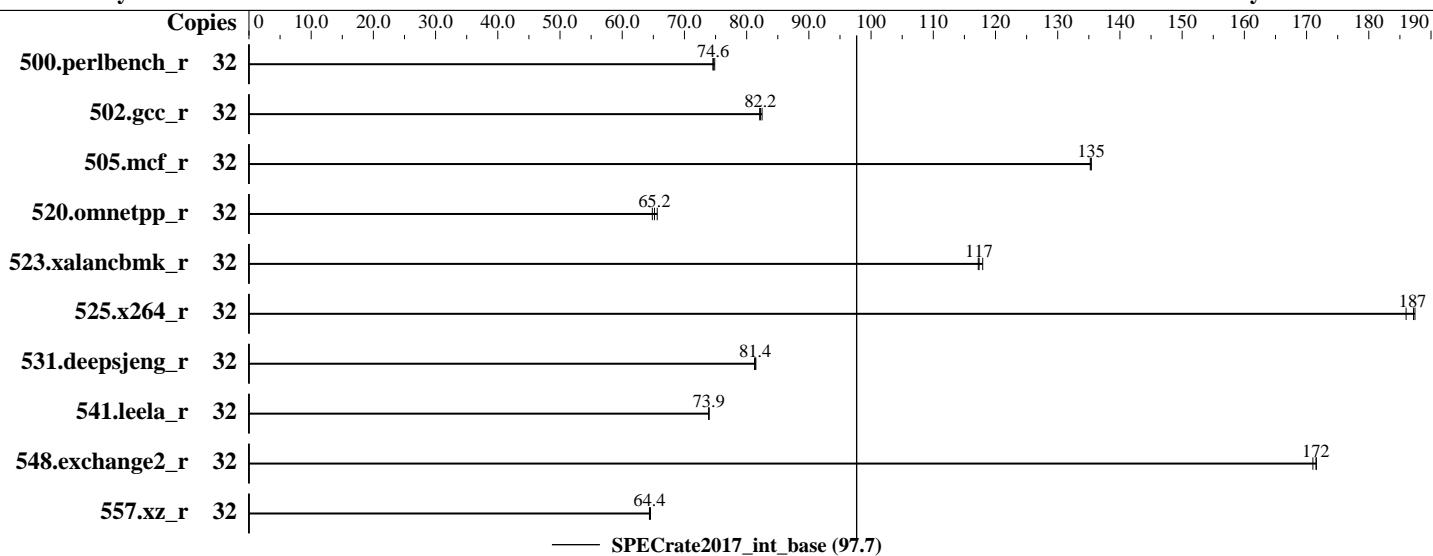

## Hardware

CPU Name: Intel Xeon Silver 4215  
Max MHz.: 3500  
Nominal: 2500  
Enabled: 16 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 11 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R, running at 2400)  
Storage: 1 x 1200 GB SAS, 10000 RPM  
Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64) 4.12.14-94.41-default  
Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;  
Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux  
Parallel: No  
Firmware: Version 6.52 Released Mar-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Huawei**

**SPECrate2017\_int\_base = 97.7**

**Huawei CH121 V5 (Intel Xeon Silver 4215)**

**SPECrate2017\_int\_peak = Not Run**

**CPU2017 License:** 3175

**Test Date:** Apr-2019

**Test Sponsor:** Huawei

**Hardware Availability:** Apr-2019

**Tested by:** Huawei

**Software Availability:** Dec-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	<b>683</b>	<b>74.6</b>	680	74.9	683	74.6							
502.gcc_r	32	549	82.5	<b>551</b>	<b>82.2</b>	552	82.1							
505.mcf_r	32	<b>382</b>	<b>135</b>	382	135	382	135							
520.omnetpp_r	32	640	65.6	648	64.8	<b>644</b>	<b>65.2</b>							
523.xalancbmk_r	32	288	117	287	118	<b>288</b>	<b>117</b>							
525.x264_r	32	301	186	299	187	<b>299</b>	<b>187</b>							
531.deepsjeng_r	32	<b>451</b>	<b>81.4</b>	451	81.3	450	81.5							
541.leela_r	32	<b>717</b>	<b>73.9</b>	717	73.9	717	73.9							
548.exchange2_r	32	490	171	<b>489</b>	<b>172</b>	489	172							
557.xz_r	32	<b>537</b>	<b>64.4</b>	537	64.4	535	64.5							

**SPECrate2017\_int\_base = 97.7**

**SPECrate2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 97.7

Huawei CH121 V5 (Intel Xeon Silver 4215)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: Apr-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

## General Notes (Continued)

is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on sles12sp4 Wed Apr 24 04:11:45 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4215 CPU @ 2.50GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 32

On-line CPU(s) list: 0-31

Thread(s) per core: 2

Core(s) per socket: 8

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Silver 4215 CPU @ 2.50GHz

Stepping: 6

CPU MHz: 2500.000

CPU max MHz: 3500.0000

CPU min MHz: 1000.0000

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 97.7

Huawei CH121 V5 (Intel Xeon Silver 4215)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: Apr-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

## Platform Notes (Continued)

BogoMIPS: 5000.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 11264K  
NUMA node0 CPU(s): 0-7,16-23  
NUMA node1 CPU(s): 8-15,24-31  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmpf perf pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single ssbd mba ibrs ibpb stibp tpr\_shadow vnmi flexpriority ept vpid fsgsbbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 11264 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23  
node 0 size: 191904 MB  
node 0 free: 190059 MB  
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31  
node 1 size: 193280 MB  
node 1 free: 191585 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 394429268 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
SuSE-release:  
SUSE Linux Enterprise Server 12 (x86\_64)  
VERSION = 12  
PATCHLEVEL = 4

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 97.7

Huawei CH121 V5 (Intel Xeon Silver 4215)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: Apr-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

## Platform Notes (Continued)

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

os-release:
  NAME="SLES"
  VERSION="12-SP4"
  VERSION_ID="12.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux sles12sp4 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

run-level 3 Apr 22 05:51

SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   700G  15G  686G   3%  /

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 6.52 03/16/2019
Memory:
 24x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933, configured at 2400

(End of data from sysinfo program)
```

## Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
 557.xz_r(base)
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
 Version 19.0.1.144 Build 20181018
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 97.7

Huawei CH121 V5 (Intel Xeon Silver 4215)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: Apr-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

=====  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 548.exchange2\_r(base)

=====  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 97.7

Huawei CH121 V5 (Intel Xeon Silver 4215)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3175

Test Date: Apr-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lgkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lgkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lgkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-04-24 04:11:45-0400.

Report generated on 2019-05-15 13:33:01 by CPU2017 PDF formatter v6067.

Originally published on 2019-05-14.